

Corner elements - Space-optimised bathroom design

burda
Sanitärtechnik



Corner elements *especially suitable for difficult installation situations*

- Saves space thanks to low side dimension
- Infinite height adjustment, standard 150 mm

All toilets
compatible with Duravit Sensowash® C

CORNER ELEMENTS

WC corner element

The **burda** WC corner element with its ideal dimensions 465x350x265 mm is pre-fitted at the factory for an activation from the front or the top. It therefore leaves nothing to be desired in terms of design and individual qualities of use. Combined with bathroom furniture and optical enlargers like mirrors, **burda** corner elements can be used to create smart solutions even with difficult floor plans.

Application area


Anywhere where the priority is on achieving a convenient and space-enhancing bathroom design, there is a demand for solutions that can be implemented quickly and cost-effectively. As 50 % of all bathrooms in need of renovation are smaller than 4,5sqm there is a particular demand for a solution that creates space, where arranging sanitary units in the corners has already proved successful. The range of **burda** corner elements allows convenient solutions to be realised according to the user's individual requirements - even in small, tight and awkwardly shaped bathrooms and guest toilets.

Advantages

The WC corner elements ideally lend themselves as problem-solvers and design features, particularly in small bathrooms and guest toilets. The cost-effectiveness of the corner elements is distinguished by their excellent use of space and quick, simple assembly. The range of toilets and wash-stand elements are virtually indispensable for modern bathroom design.

Dual flush activation offers a special feature, which can be optionally mounted from the front and the top.

- Only 465 mm diagonal fitting space
- Virtually maintenance free pneumatic flushing system
- Dual flush technology
- Actuation either on the front or top
- Footrests 150 mm height adjustable
- Sound and condensation-insulated
- Sturdy, self-supporting construction, quick and easy installation







WT corner element
(1050 mm)




WC corner element
(1050 mm)



WC corner element
(850 mm)

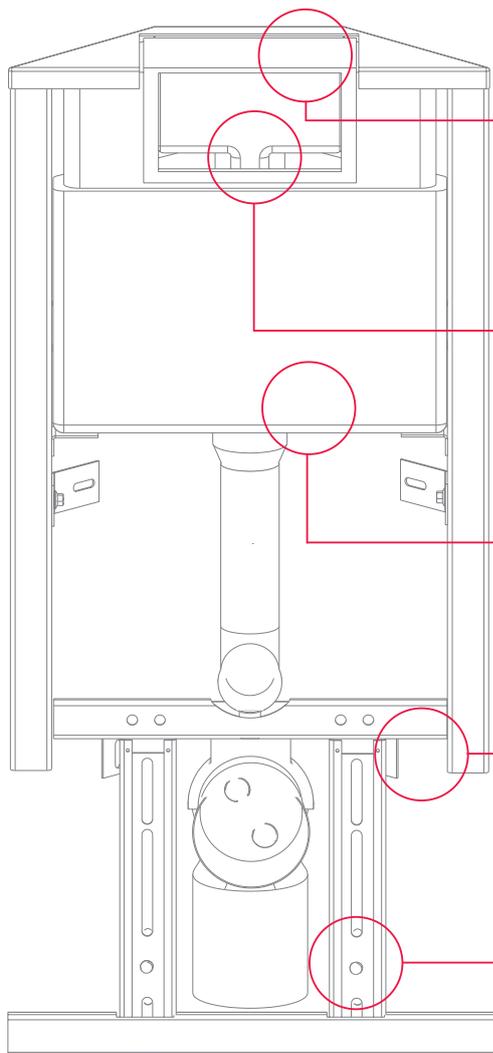

A minimum space requirement:
Installation dimensions in mm
465 x 350 x 265



A dual flush system with
pneumatic activation. Either
from the front or from the top.



Factory-made condensation
insulation.



A stable self-supporting
frame structure.



Element base extendable by
150 mm as standard.



burda
Sanitärtechnik

Herbert Burda GmbH
Krefelder Straße 87
40549 Düsseldorf

Tel. +49 211 95001-0
Fax. +49 211 500575

www.burda-online.com