



PRODUCT RANGE 2025

03 – 18

Santro

WC
washstand
sink

page 06-08
page 09-10
page 10

bidet
urinal
Intermediate support

page 11
page 11-12
page 13

Fitting plate
Accessories

page 14-16
page 17-18



19 – 50

BS+ Dry construction system



51 – 54

Burda-Block combined wet and dry construction system



55 - 58

my move elements Electrically height-adjustable



59 – 64

Kombiset Wet construction system



65 – 78

Flush buttons




79 – 94

Flushing systems




Santro The ready planked drywall installation system

Material requirement for the front wall installation of SANTRO

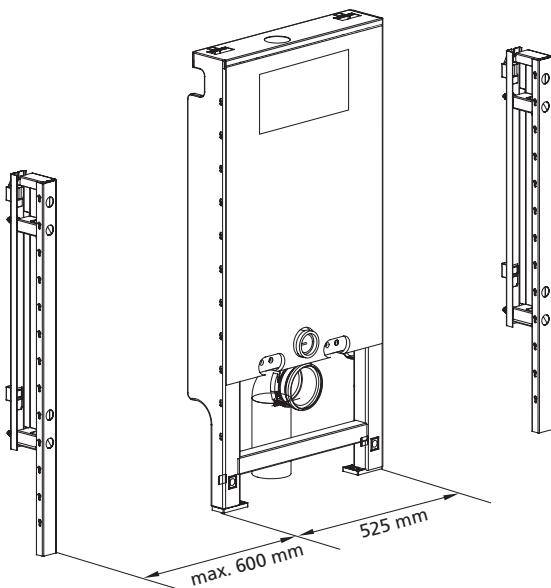


Number of modules	Front wall width upto 1080 mm	Front wall width upto 1600 mm	Front wall width upto 2200 mm	Front wall width upto 2800 mm	Front wall width upto 3400 mm
0	3 subcarrier 3 panels	4 subcarrier 4 panels	5 subcarrier 5 panels	6 subcarrier 6 panels	7 subcarrier 7 panels
1	2 subcarrier 1 panel	2 subcarrier 3 panels	3 subcarrier 3 panels	4 subcarrier 4 panels	5 subcarrier 5 panels
2		2 subcarrier 2 panels	2 subcarrier 3 panels	2 subcarrier 3 panels	4 subcarrier 4 panels

Material requirement for the front wall installation of SANTRO
with nest element for pipelines, shower or bathtub

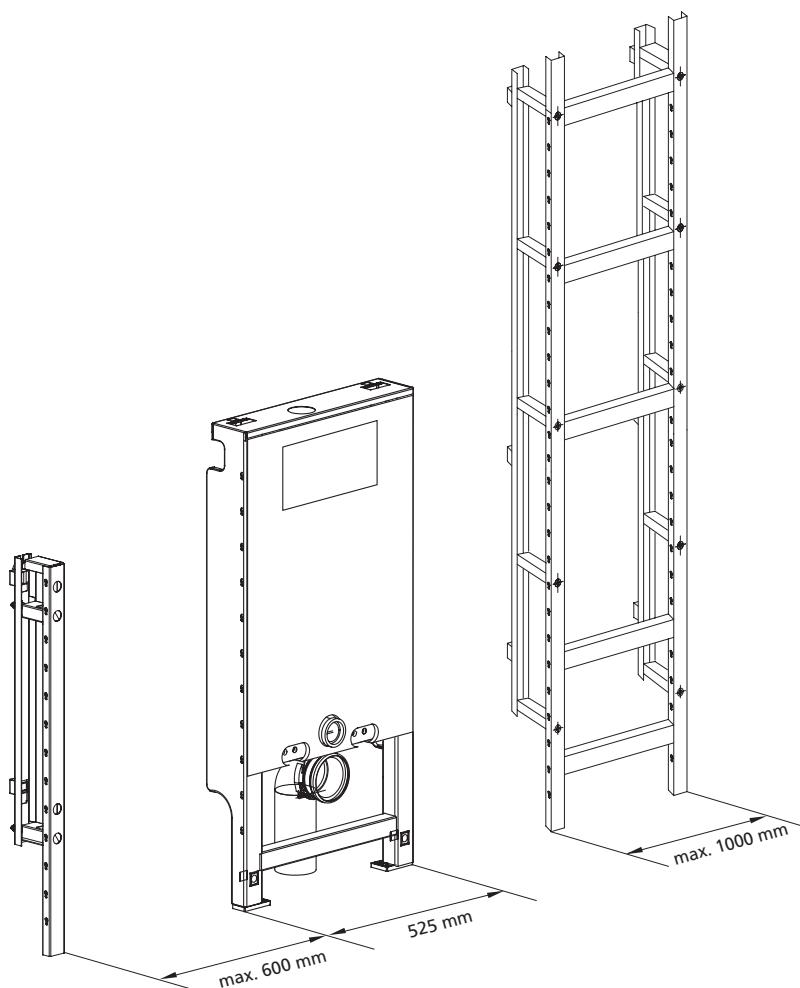

Number of modules	Front wall width 1200-2600 mm	Front wall width 2200-3600 mm
0	1 Nesting element 2 subcarrier 7 panels	1 Nesting element 3 subcarrier 8 panels
1		1 Nesting element 3 subcarrier 8 panels

Santro Wall-WC module with concealed cistern

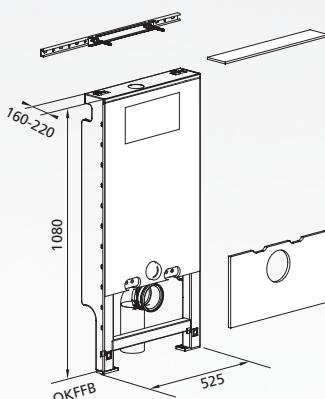

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1080 / 160-220 mm

Accessories:

Flush plates from page 65

Note: WC power bearing for WC ceramics with contact surface smaller than 17 cm (e.g. Flaminia, Sentique), page 8

Design

Ref. no.

Geberit cistern Sigma
with 2-quantity flush



Installation height 1080 mm 611113.01



all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:
also compatible with Geberit Duo-Fresh
inserts (cleaning cubes)

Santro wall-hung WC module with concealed cistern (825 mm)



- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front or top

Dimensions: W / H / D 525 / 825 / 160-220 mm

Accessories:

Flush plates from page 65

Note:

The toilet lid only remains in the open position if the distance between the wall and the wall to the toilet lid is > 25 mm.

When using WC ceramics such as those from Keramag: Renova Nr. 1, Comprimo 204550, Joly 203060, V&B: Viala 765310, Viala 765210, the flush plate must be mounted from above.

Note:

WC power bearing for WC ceramics with a support surface smaller than 17 cm (e.g. Flaminia, Sentique), page 8



all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:
also compatible with Geberit Duo-Fresh
inserts (cleaning cubes)


Design

Ref. no.

Geberit cistern Omega
with 2-quantity flush

Installation height 825 mm 611190.00

Santro WC complete kit with concealed cistern for guest WC single unit up to 1250 cm wide

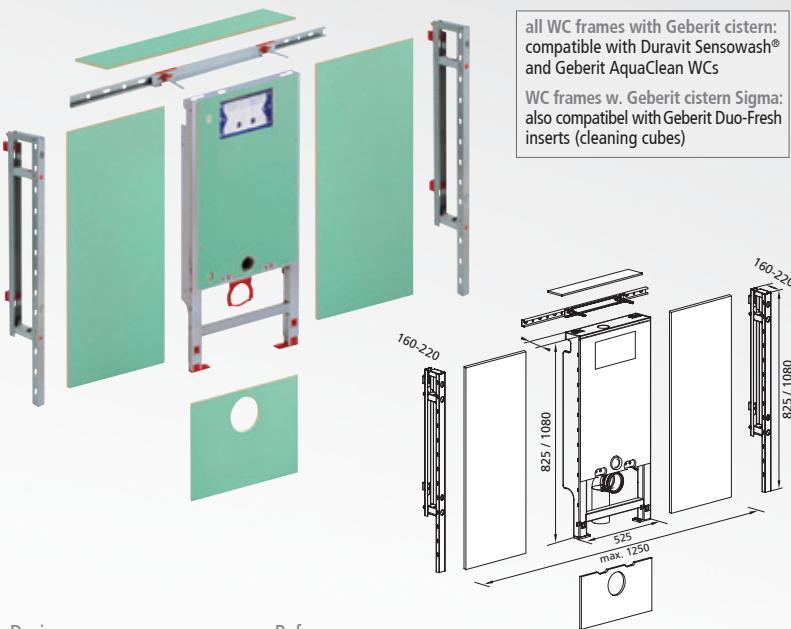

Design Ref. no.

Geberit cistern Sigma
with 2-quantity flush
Actuation from the front

Installation height 1080 mm 611250.01

Geberit cistern Omega
with 2-quantity flush
Actuation from the front or top

Installation height 825 mm 611290.00

Consisting of: 1 x WC element suitable for standard wall-hung WCs

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front or front / top

Dimensions: H / D 850 oder 1080 / 160-220 mm
Suitable for single WC system (guest WC) max. width 1250 cm

Accessory pack included (separate accessory pack):

2 x subcarrier

For extending an extension section and for bridging distances distances over 625 mm wide between 2 sanitary modules etc.

2-tlg. GKFI construction panel

450 mm wide, core-impregnated, fibre-reinforced plasterboard

Accessories optional:



Flush plates from page 65

Note:

WC power bearing for WC ceramics
with contact surface smaller than 17 cm
(e.g. Flaminia, Sentique), page 8



Santro WC module with concealed cistern for floor-standing WC

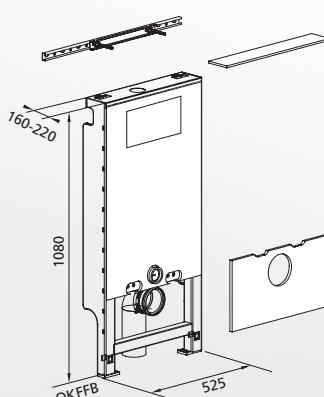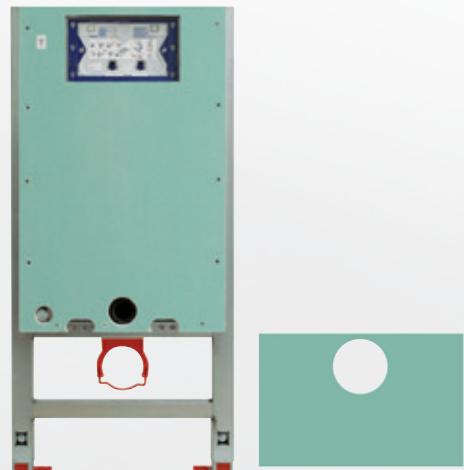

Design Ref. no.

Geberit cistern Sigma
with 2-quantity flush

Installation height 1080 mm 611236.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- WC connection set, white with cover rosettes
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Maße: W / H / D 525 / 1080 / 160-220 mm

Accessories:

Flush plates from page 65

Note:

WC power bearing for WC ceramics
with contact surface smaller than 17 cm
(e.g. Flaminia, Sentique), page 8




all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs
WC frames w. Geberit cistern Sigma:
also compatible with Geberit Duo-Fresh
inserts (cleaning cubes)



Santro WC modules suitable for drywall construction and pre-wall

Santro WC module with concealed cistern for floor mounted children WC

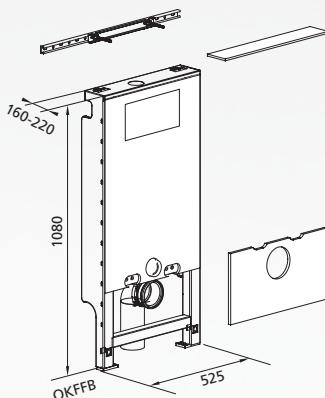

Design Ref. no.

Geberit cistern Sigma
with 2-quantity flush

Installation height 1080 mm 611335.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- WC connection set, white with cover rosettes
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1080 / 160-220 mm
WC installation at a height suitable for children

Accessories:

Flush plates from page 65

Note:

WC power bearing for WC ceramics with a support surface smaller than 17 cm (e.g. Flaminia, Sentique), page 8



Santro / BS+ WC support brackets for WC ceramics with small contact surface




Design Ref. no.

1 pair 216400

For additional support
of WC ceramics
Support surfaces smaller than 17 cm
(e.g. Flaminia, Sentique)



Santro attachment set for support and folding support rails

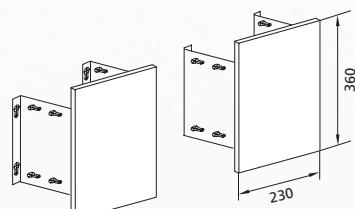

Design Ref. no.


1 pair 697155
with 2 wall mountings

- Galvanised, torsion-resistant sheet metal construction
- Mounting plate for variable arm lever mounting made of laminated wood
- all fastening and mounting accessories.

Suitable for modules
in barrier-free design



Santro washstand module for floor-standing fitting

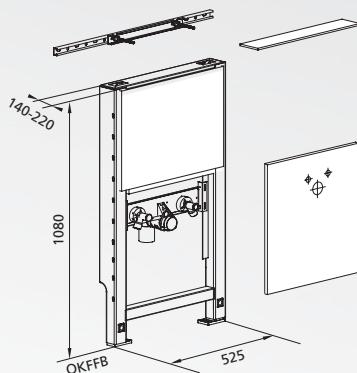

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1080 / 140-220 mm

Design Ref. no.

for floor-standing fitting

Installation height 1080 mm 621258.00



Design Ref. no.

with built-in tap plate for
Connection of an water heater

Installation height 1080 mm 622026.00



Santro children washstand module for floor-standing fitting

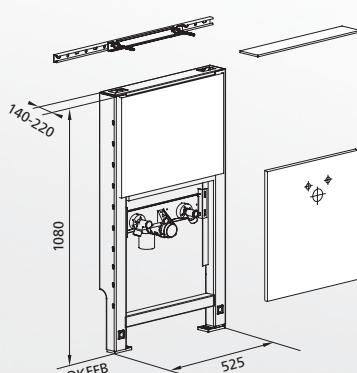

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1080 / 140-220 mm

Design Ref. no.



Installation height 1080 mm 621012.00



Santro washstand modules

suitable for drywall construction and pre-wall

Santro washstand module for furniture washstand for floor-standing fitting

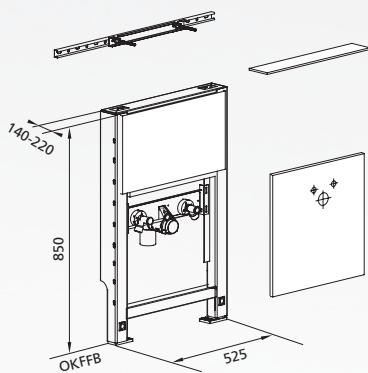

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 850 / 140-220 mm

Design



Ref. no.

for floor-standing fitting

Installation height 850 mm 621050.00



Santro sink module for wall fitting

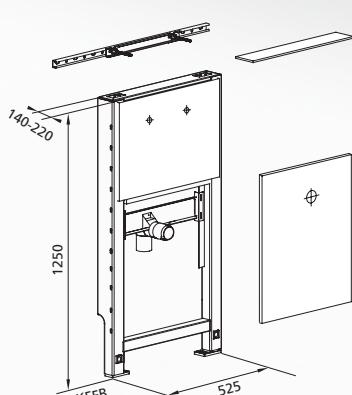

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1250 / 140-220 mm



Design

Ref. no.

Installation height 1250 mm 621449.00



Santro bidet module for floor-standing fitting

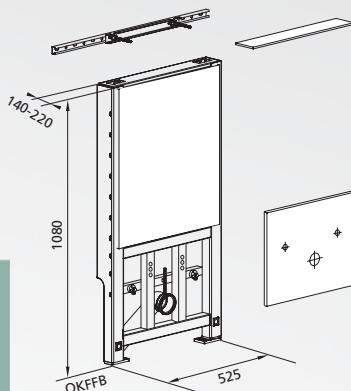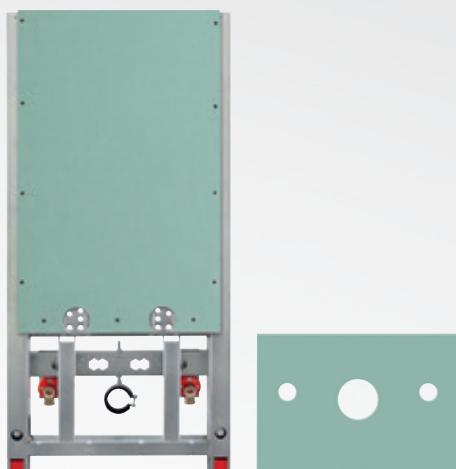

Design

Ref. no.

for floor-standing fitting


Installation height 1080 mm 631578.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Variable bidet ceramic fixtures
- Swivelling, depth-adjustable DN 50 urinal trap
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1080 / 140-220 mm



Santro urinal module with surface-mounted/concealed flush valve or shell set

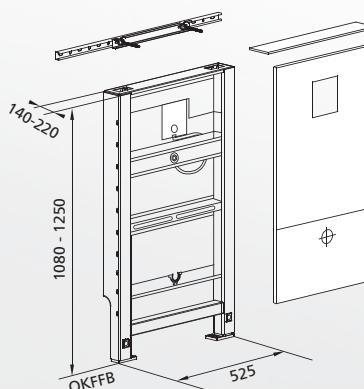

Design

Ref. no.

As an empty element

Installation height 1080 mm 647600

Installation height 1250 mm 647620

Design

Ref. no.

Burda flush valve U-05/06

Installation height 1250 mm 641694

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Adjustable urinal mounting crossbar
- Adjustable sound-decoupled water inlet crossbar
- Adjustable drain support bar
- swivelling drain elbow DN 50
- Pre-assembled flush-mounted flush valve or pipework set
- Construction protection for inspection opening
- All fixing and installation accessories
- Adjustable foot supports 0-220 mm
- 1/2" connection bracket
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1080 oder 1250 / 140-220 mm
Suitable for standard urinals



Attention:

If you are using a urinal cover, please contact our hotline
contact our hotline 0211/95001-0 beforehand!



Santro urinal modules suitable for drywall construction and pre-wall

Santro urinal module with shell set for Flowtronik

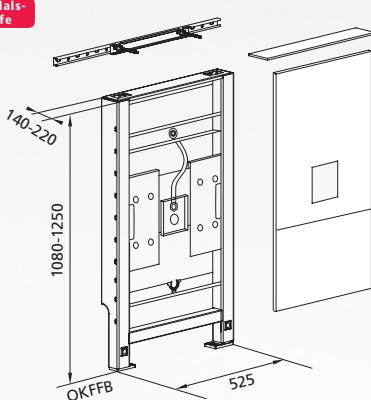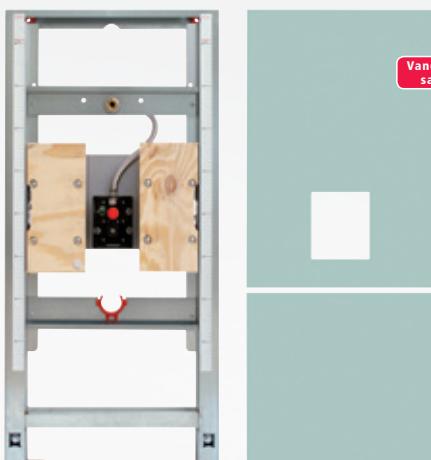

- Galvanised, self-supporting and sound-decoupled steel construction
- Pre-assembled flush-mounted urinal pipework set with 230 V connection, Valve block with water shut-off
- Functions: Standard and stadium mode, forced flushing
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Urinal mounting plate
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Swivelling drain elbow DN 50
- Construction protection for inspection opening
- All fixing and installation accessories
- Adjustable foot supports 0-220 mm
- 1/2" connection bracket
- Flexible hose
- Inlet connector
- Urinal connection set

Dimensions: W / H / D 525 / 1080-1250 / 140-220 mm
Suitable for standard urinals

Note:

Not suitable for urinals with moulded-in urinal trap,
e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.



Design Ref. no.

Installation height 1080 mm 646000

Installation height 1250 mm 646001



Santro urinal module with wall-mounted/flush-mounted flush valve or shell set

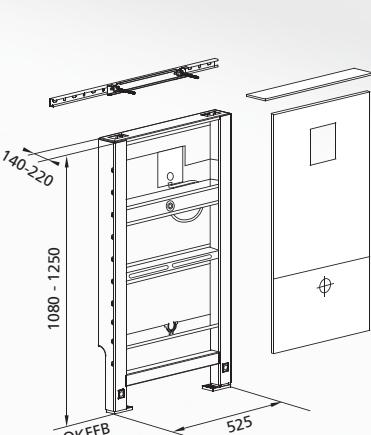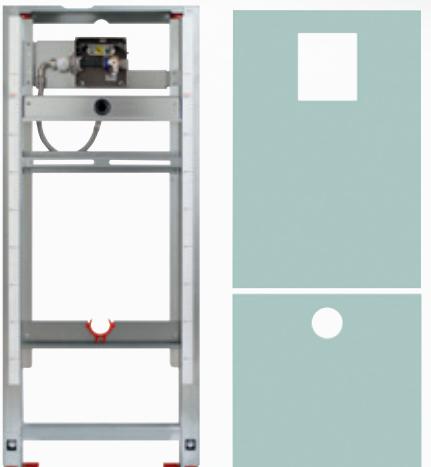

- Galvanised, self-supporting and sound-decoupled steel construction
- Pre-assembled flush-mounted urinal electronics or body kit
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Adjustable urinal fixing crossbar
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain traverse
- Swivelling drain elbow DN 50
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Flexible hose
- Inlet connector
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1080 oder 1250 / 140-220 mm
Suitable for standard urinals

Note:

Not suitable for urinals with moulded-in urinal trap,
e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.

Design Ref. no.

with Geberit universal shell set
for Hy-Tronic and Hy-Touch
Installation height 1250 mm 647572

Design Ref. no.

for Geberit Flushcontrol
Installation height 1080 mm 641714
Installation height 1250 mm 641713
for Duravit Utronic
Installation height 1080 mm 641724
Installation height 1250 mm 641723



Santro subcarrier for shelf depth 190-220 mm




For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules, etc.
Also suitable for fitting plates, Frame for installation rail (using spacer rails 677 034), adjustable in depth, can be used both left and right usable

- Galvanised, sound-decoupled steel construction
- All fixing and installation accessories

Design	Ref. no.	Design	Ref. no.
Type 108 Installation height 1080 mm Installation depth 190-220 mm	667409	Type 125 Installation height 1250 mm Installation depth 190-220 mm	667423
Type 85 Installation height 850 mm Installation depth 190-220 mm	667416	Type 60 Installation height 600 mm Installation depth 190-220 mm	667520



Santro subcarrier for shelf depth 135-160 mm

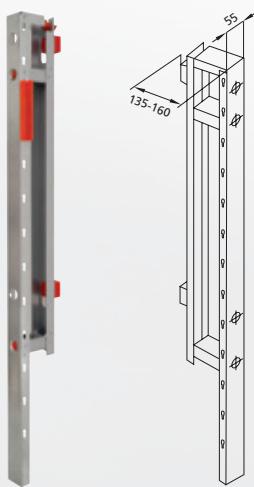

For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules, etc.
Also suitable for fitting plates, Frame for installation rail (using spacer rails 677 034),
Adjustable in depth, can be used both left and right


- Galvanised, sound-decoupled steel construction
- All fixing and installation accessories

Design	Ref. no.
Type 108 S Installation height 1080 mm	667430
Type 85 Installation height 850 mm	667447
Type 125 Installation height 1250 mm	667454



Santro shaft element for drywall construction and pre-wall Spacer rail / fitting plate

Santro shaft element

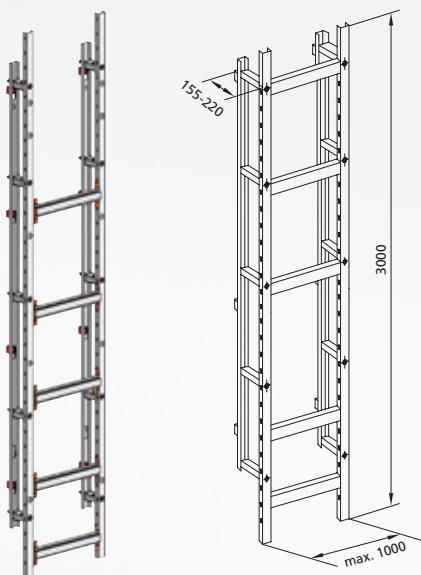

Design	Ref. no.
Type 190 1000 / 3000 / 155-220 mm	677057
Type 135 for reduced installation depth 1000 / 3000 / 135-160 mm	677040

For cladding shafts and pipe runs as well as for mounting fitting plates
(using spacer rails 677 034 or 677 033, page 14)
For bath and shower mixers or mirror cabinets etc.

- Galvanised, sound-insulated steel construction, consisting of 2 side panels
- 2 spacer rails of 3 metres each for fanning out
- All fixing and mounting accessories



Santro spacer rail




Design	Ref. no.
Länge 1080 mm	677034
Länge 3000 mm	677033

For installation in shaft elements (Type 190, 135, 190 E, 135 E) and between intermediate supports (all types)
For stabilisation and / or for holding fitting plates,
Frame for installation rail

- Galvanised sheet metal



Santro fitting plate C1 for standard concealed taps

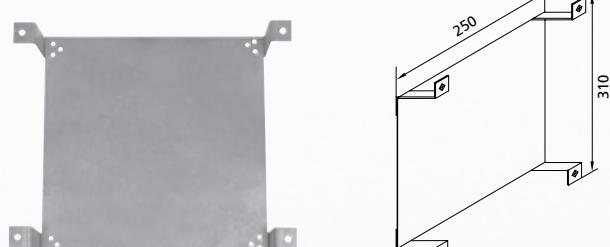


Design	Ref. no.
	680736

For installation in shaft elements (Type 190, 135, 190 E, 135 E) and between intermediate supports (all types)
For stabilisation and / or for holding fitting plates,
Frame for installation rail

- Galvanised steel construction
- 4 sound-insulated pipe clamps
- All fixing and mounting accessories



Santro fitting plate A for surface-mounted fittings



Design

Ref. no.


681658.00



For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.

- Galvanised steel construction
- 2 wall bushings 1/2"
- complete mounting and assembly accessories

**Santro fitting plate B
for shower connection or single tap system**



Design

Ref. no.


681689.00



For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.

- Galvanised steel construction
- 2 wall bushings 1/2"
- complete mounting and assembly accessories

**Santro fitting plate D
for hydraulically controlled instantaneous water heaters**



Design

Ref. no.

only 1/2" available

681740.00




For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.

- Galvanised steel construction
- 2 wall bushings 1/2"
- complete mounting and assembly accessories



Santro Fitting plates and accessories

Santro fitting plate E1 for washing machine waste water outlet



Design

Ref. no.


681764



Santro fitting plate E2 for washing machine inlet and outlet



incl. appliance connection valve



Design

Ref. no.


681771



Santro fitting plate E3 for washing machine inlet and outlet



incl. appliance connection
valv



Design

Ref. no.

683607



For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.

- Galvanised steel construction
- Concealed odour trap
- complete mounting and assembly accessories

For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.


- Galvanised steel construction
- 1 wall disc 1/2 "
- Concealed odour trap
- complete mounting and assembly accessories

For lateral installation in a subcarrier or lateral installation in a shaft element Type 190

For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.

- Galvanised steel construction
- 1 wall disc 1/2 "
- Concealed odour trap
- complete mounting and assembly accessories

Santro triangular profile



Design	Ref. no.
	679150

For over-corner mounting of modules galvanised



Santro GKFI building board



Design	Ref. no.
W x H x D	
624 x 1075 x 12,5 mm	697024
598 x 1300 x 12,5 mm	697000

Core-impregnated, fibre-reinforced plasterboard



Santro installation frame
for instantaneous water heaters



Design	Ref. no.
with frame 30 cm	400135

Santro mounting frame

- Galvanised, self-supporting and sound-decoupled steel construction
- Installation frame, incl. building protection
- 2 wall ducts 1/2'
- without cabinet element



Santro construction screws



100 pieces in a box.

For GKF building boards, self-drilling

Design	Ref. no.
for single-layer panelling 3,5 x 25 mm	697338
for double panelling 3,5 x 35 mm	697345



Santro construction screws



100 pieces in a box.

Self-drilling, for shaft elements,
intermediate beams, etc.

Design	Ref. no.
4,8 x 16 mm	697536
4,8 x 19 mm	697537



Santro wall mounting rail



For continuous mounting of modules etc.

Design	Ref. no.
1080 mm	697048



03 – 18 Santro Pre-planked prewall system



19 – 50	BS+	WC page 24-30 WT page 31-37 Sink page 38	Bidet Urinal Shower/Bathtub	page 38 page 39-41 page 41-42	Built-in furnititure Fastening element Element for fittinias	page 43 page 44 page 44	Traverses page 45-47 Accessories page 48-50
---------	-----	------------------------------------------------	-----------------------------------	-------------------------------------	--------------------------------------------------------------------	-------------------------------	------------------------------------------------



51 – 54 Burda-Block combined wet and dry construction system



55 - 58 my move elements Electrically height-adjustable



59 – 64 Kombiset Wet construction system



65 – 78 Flush buttons



79 – 94 Flushing systems



Description of system

1.1 BS+

The BS+ installation range is the universally applicable, industrially pre-assembled element system for stud wall and front wall installation.

1.1.1 Elements


This extensive range includes elements for toilets but also for urinals, bidets and wash-stands, as well as the corresponding elements for barrier-free construction. Ready-made elements are even available for special applications such as countertop washbasins with wall fittings, water metres or urinal electronics.

1.1.2 Free choice of connections


With all units the fitter is free to choose between cisterns from various brand manufacturers and decide for himself what type of pre-fitted connection should be supplied with the element.

1.2 Application area


The BS+ is the flexible dry construction installation system for front wall installation or for fitting into a stud wall.

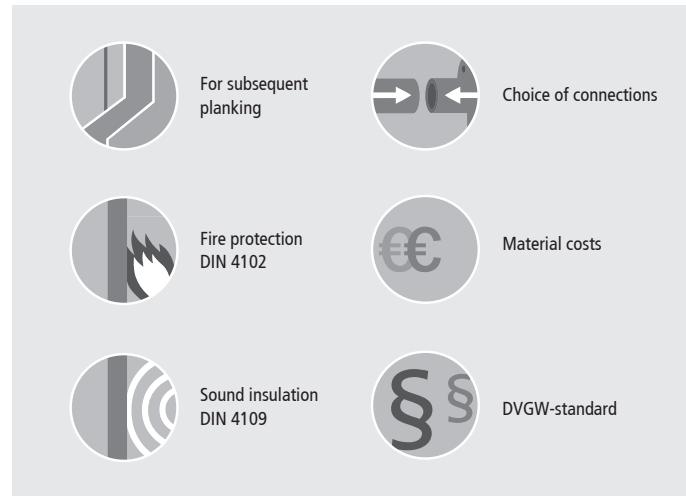


The application areas for this system are therefore building sites where drywallers are also expected to be included in handling the job.

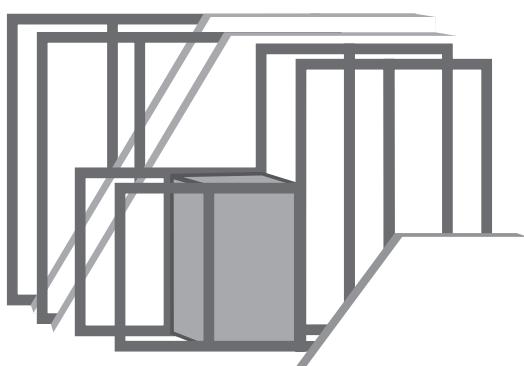

In front of stud wall

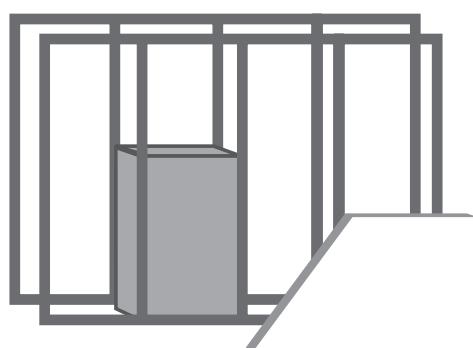


In stud wall

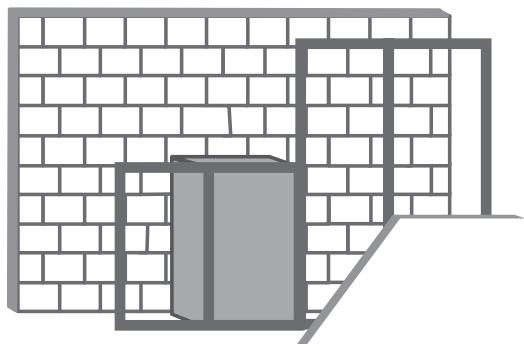

In front of solid wall

1.3 Benefits

The BS+ installation range offers fitters and planners the opportunity to create complete installations in classic dry constructions and to resort to pre-assembled units. Individual solutions can be flexibly planned in this way.

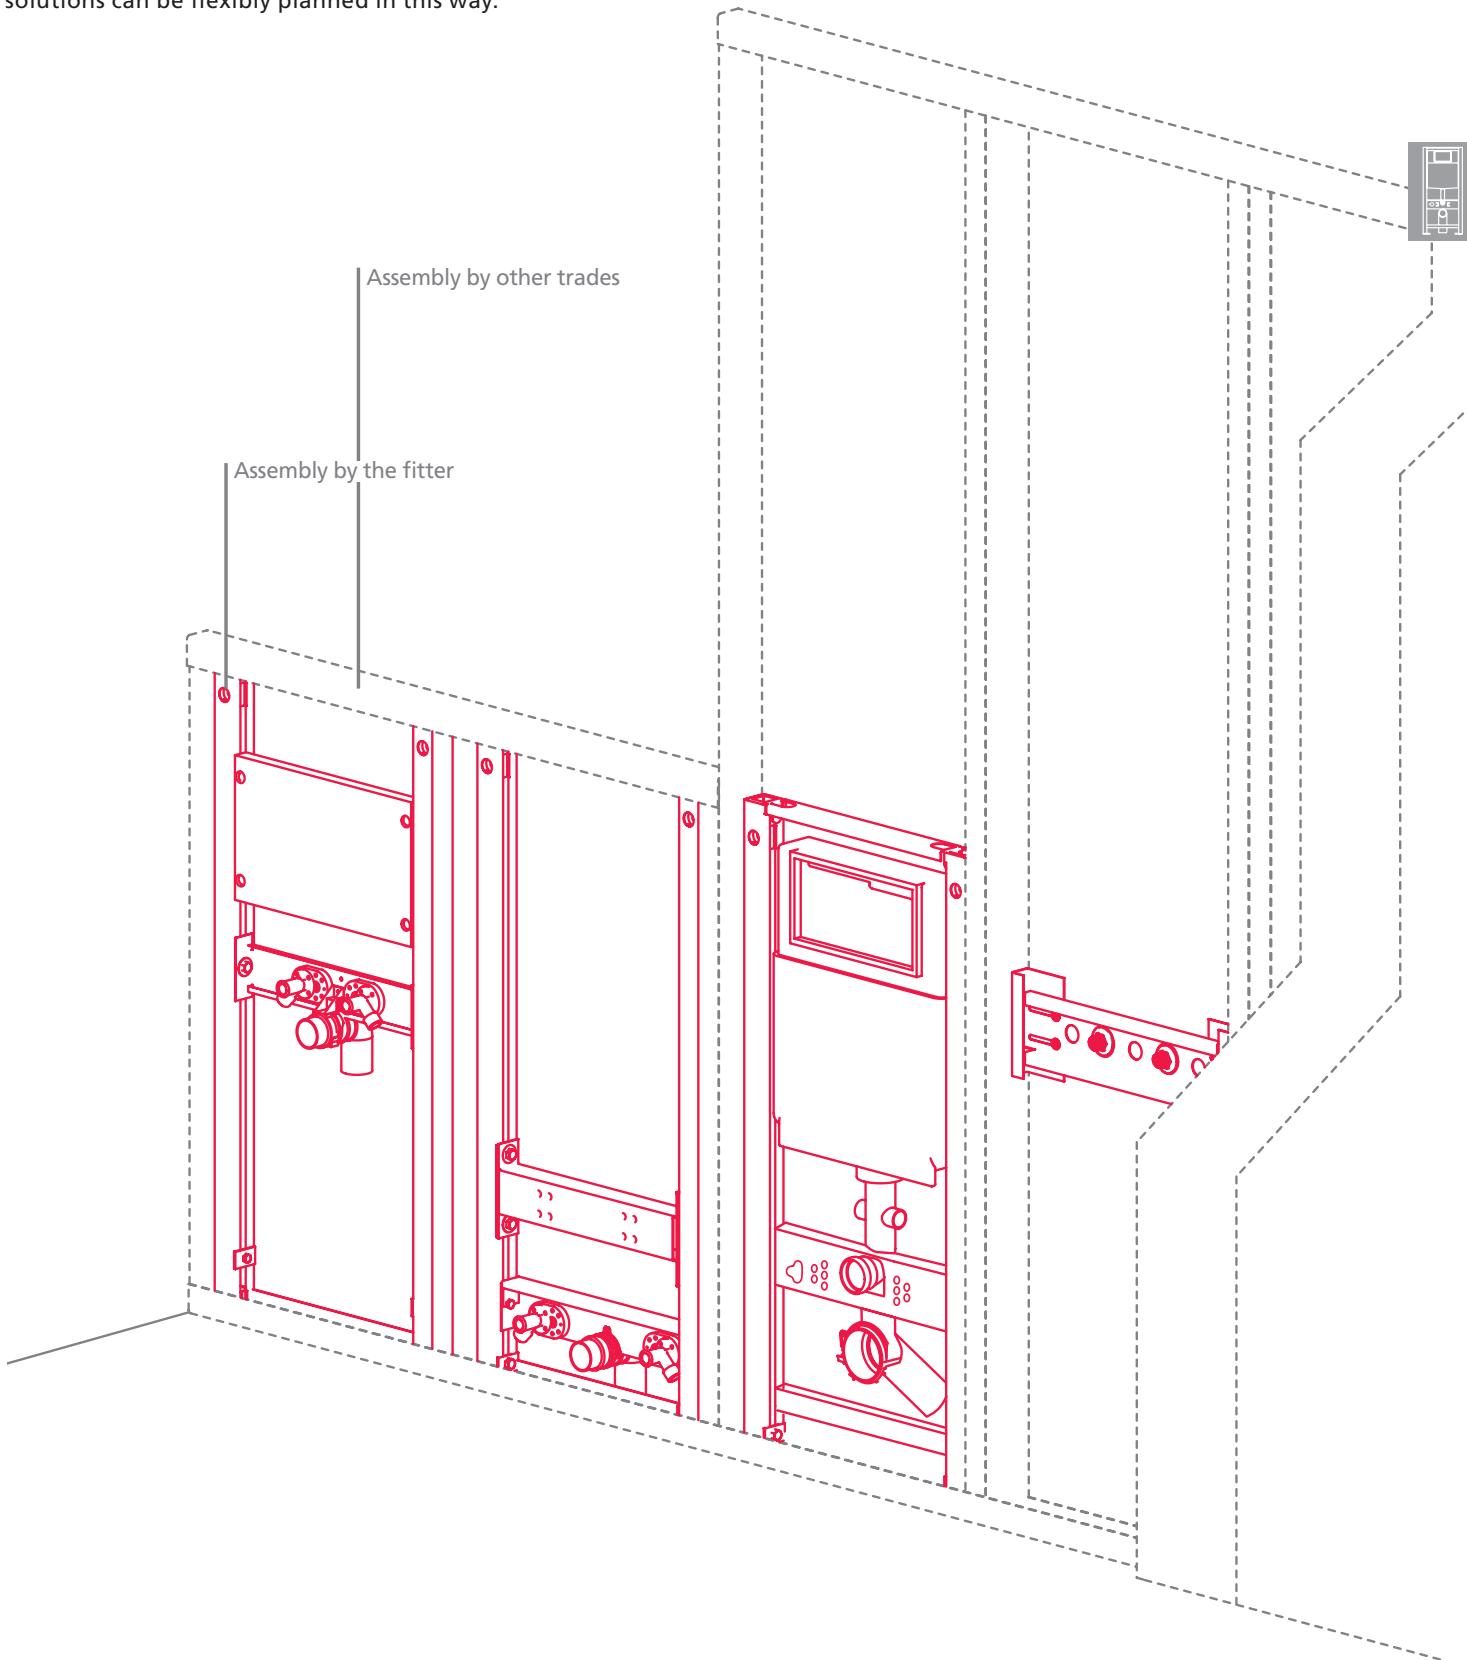

Assembly instructions for fitting in stud walls

1.1 Perfect and installation-friendly

For new builds, renovations, loft conversions and the commercial sector: Light construction wall with integrated fastening and connection options for sanitary units are in line with modern building technology. The BS+ system from Burda gives you a fully galvanised, self-supporting design for fitting sanitary units into light construction walls. This is an installation-friendly system for fitting individually into the C-profiles of a stud wall.


1.2 Design of the light constructions walls

The BS+ elements from Burda are designed to be fitted in stud walls according to DIN 18183, November 1988 edition, walls made out of plasterboard panels (design of metal stud walls) or wooden stud walls, with a load bearing capacity in accordance with DIN 18183. In so-called wet rooms with metal stud wall and BS+ Plus sanitary units planking should be done with double-layer, impregnated firecheck plasterboard panels.



When fitting WC installations suitable for old and disabled people, reinforced UA profiles must always be used!


Installation example:




metre mark to the standing C-profiles.



Inserting the element into the stud wall.




Metre mark on the stud wall align with the marking on the panel. (B)





Height adjustment of the element is done by adjusting the feet of the element. (A)

- Loosen nut
- Move foot to required size
- Tighten nut




Align the outer edges of the element flush with the outer edges of the stud wall and fix the position. (C)



Screw the aligned stud wall panel combination to the side and to the floor.

Note: The panelling must always be fully seated and screwed down without any gaps.

Installation instructions for installation in a pre-wall installation

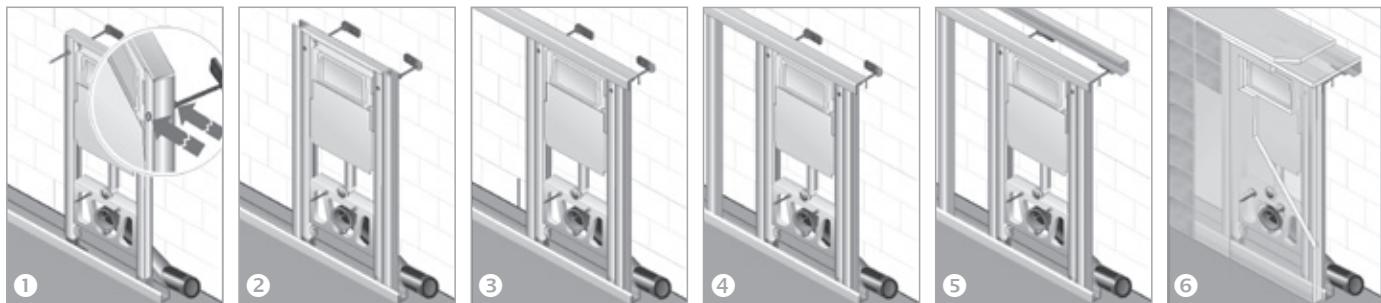

① Fasten the U-profile to the floor at the required distance to the wall and place the BS+ element into it. Install the two wall brackets supplied as accessories to the BS+ element and adjust the gap between the element and the wall with the aid of the wall brackets. Make the wall brackets face downwards or to the side. Cut the threaded rods off so that they no longer protrude from the element. Tighten the lock nuts.

② On the left and right of the element, use the self-tapping screws to fasten a C-profile on each side, which are additionally joined to the U-profile with pop rivets at the bottom.

Note: As a matter of principle, all C and U-profiles are joined with pop rivets or profile connecting pliers.

③ Put another U-profile over the element in the required length, which will act as a shelving area.

④ Fan out the levels in which the panels are located. Every 625 mm, a C-profile must be fanned out or a new panel placed.

⑤ Now attach another U-profile (back to the wall) at the same height as the top edge of the element.

⑥ Plank this construction with plasterboard suitable for damp rooms. The panelling must always be double with no gaps! Additional screws must be used in the WC area!


Can be installed in a stud wall or as a single element using wall brackets for pre-wall installation

- The elements consist of 48 mm wide profiles, so they can be perfectly installed in a 50 plasterboard stud wall.


- GKF building boards can be installed be placed butt to butt
- Fastening the building boards without pre-drilling

- Sound decoupling integrated as standard (all red plastic parts)
- Element feet as standard 220 mm extendable

- High corrosion protection due to sendzimir galvanised elements
- 4-point fastening
- All current standards are complied with (e.g. DIN 4109 etc.)

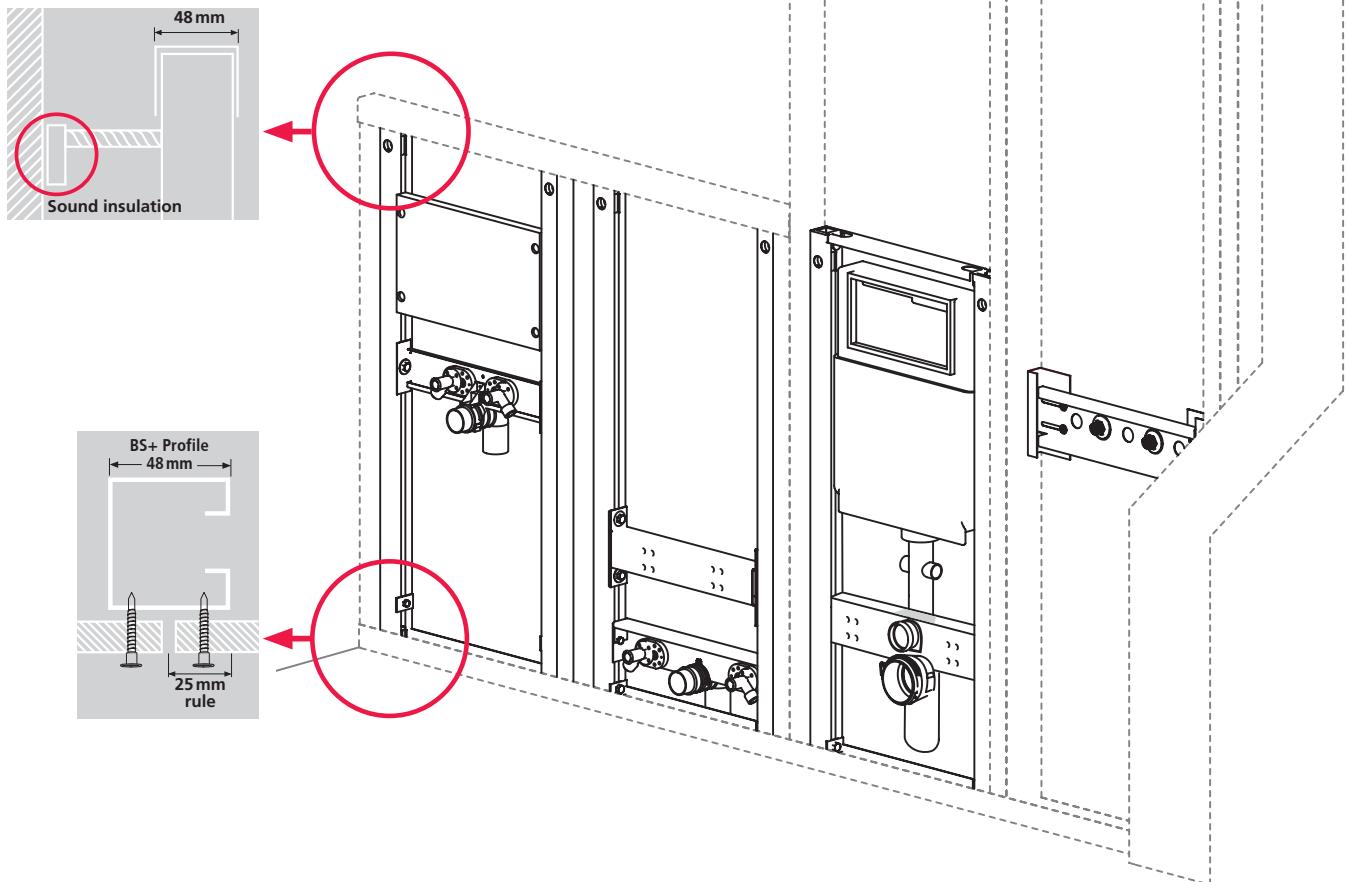

BS+ wall-hung WC element with concealed cistern Height 1120 mm

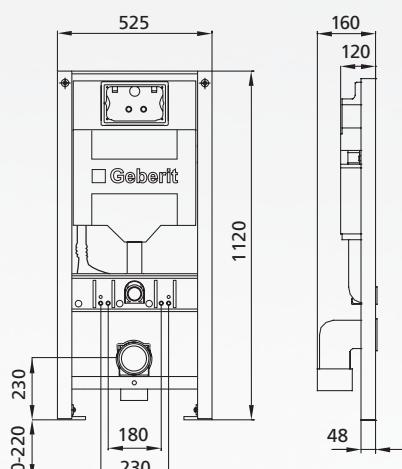

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99) and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 47
Flush plates and flushing systems from page 59

Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48

Can also be used as a barrier-free WC element.




Design	Ref. no.	Design	Ref. no.
Installation height 1120 mm			
Geberit cistern Sigma with 2-quantity flush	211088.01	Geberit cistern Delta with 2-quantity flush incl. sound-decoupled wall brackets for pre-wall mounting	211109.99
		Burda K770 with 2-quantity flush	211140.00

all WC frames with Geberit cistern: compatible with Duravit Sensowash® and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma: additionally compatible with Geberit Duo-Fresh inserts (cleaning cubes)

BS+ WWC element with Geberit Sigma concealed cistern or Burda concealed cistern K770 for children

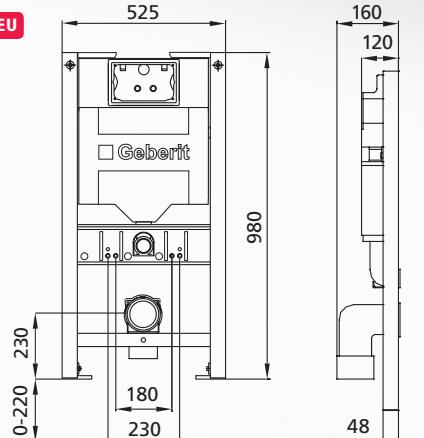

Children's wall-hung WC

Design	Ref. no.
Children's wall-hung WC Installation height 980 mm	
Geberit concealed cistern Sigma with 2-quantity flush	211084.01
Burda concealed cistern K770 with 2-quantity flush	211151.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual flush technology or built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Construction protection for inspection opening
- Building plugs for inlet and outlet pipe
- All fixing and installation accessories
- Adjustable foot supports up to max. 0-220 mm
- Cistern connection bracket and integrated or separate angle valve
- Operation from the front


Dimensions: W / H / D 525 / 980 / 160 mm (with drain)
Suitable for toddler/child wall-hung WC.

Accessories:

Sound-decoupled wall bracket for pre-wall installation, page 50
Flush plates and flushing systems from page 65



BS+ wall-mounted WC element for odour extraction exhaust air

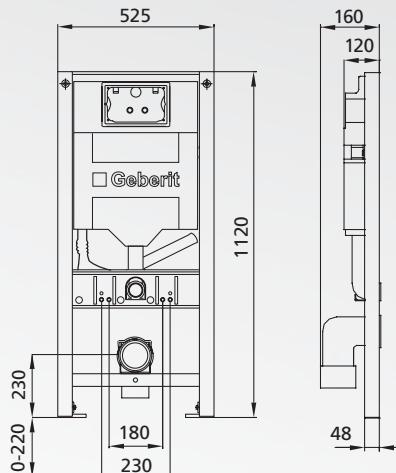

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99) and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 47
Flush plates and flushing systems from page 59

Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48


Design	Ref. no.	Design	Ref. no.
Installation height 1120 mm			
Geberit cistern Sigma with 2-quantity flush for odour extraction Exhaust air 50 mm prepared	220088.01	Burda cistern K770 with 2-quantity flush for odour extraction Exhaust air 50 mm prepared	220140.00

all WC frames with Geberit cistern:
compatible with Duravit Sensowash® and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:
additionally compatible with Geberit Duo-Fresh inserts (cleaning cubes)



BS+ wall-hung WC element Height 825 und 980 mm

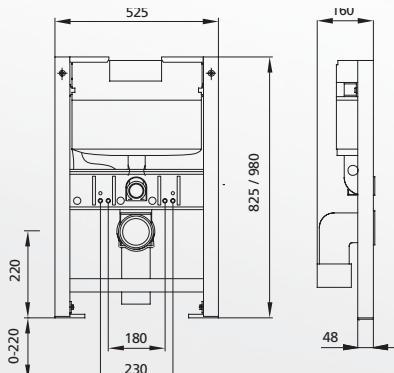

all WC frames with Geberit cistern:
compatible with Duravit Sensowash® and Geberit AquaClean WCs
WC frames with Geberit cistern Sigma:
additionally compatible with Geberit Duo-Fresh inserts (cleaning cubes)

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99) and integrated or separate angle valve
- Actuation from the front or top

Dimensions: W / H / D 525 / 825 oder 980 / 160 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 48
Flush plates and flushing systems from page 65

Note:

The toilet lid only remains in the open position if the distance between the wall and the wall to the toilet lid is > 25 mm.

When using WC ceramics such as those from Geberit/Keramag: Renova No. 1, Comprimo 204550, Joly 203060 V&B: Viala 765310, Viala 765210, the flush plate must be installed from above.

Design	Ref. no.	Design	Ref. no.
Installation height 825 mm			
Geberit cistern Omega Actuation from above/front with 2-quantity flush	211390.00	Geberit cistern Omega Actuation from above/front with 2-quantity flush	211395.00


WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48



[Can also be used as a barrier-free WC element.](#)



BS+ double WC element for wall-hung WC

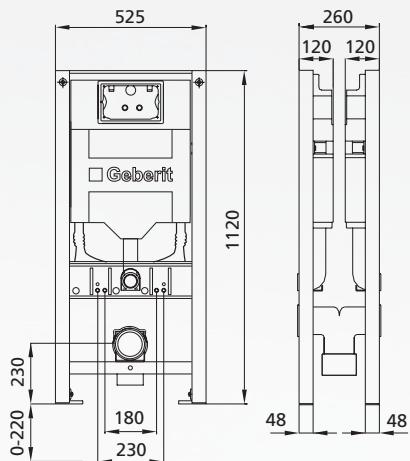

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- HDPE breeches branch DN 80 / 100 / 80
- 2x wall-mounted WC connection fittings
- 2x built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- 2x cistern connection bracket with integrated or separate angle valves
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 260 mm
Suitable for standard wall-hung WCs.

Accessories:

Flush plates and flushing systems from page 59

Note:

WC power brackets for WC ceramics with small contact surface less 17 cm
(e.g. Flaminia, Sentique), page 45

Can also be used as a barrier-free WC element.

Design Ref. no.

Installation height 1120 mm

Geberit cistern Sigma with 2-quantity flush	211122.01
Geberit cistern Delta with 2-quantity flush	211222.99
Burda cistern K770 with 2-quantity flush	211240.00

all WC frames with Geberit cistern:
compatible with Duravit Sensowash® and Geberit AquaClean WCs
WC frames with Geberit cistern Sigma:
additionally compatible with Geberit Duo-Fresh inserts (cleaning cubes)




BS+ floor-standing WC element with Geberit cistern Sigma
oder Burda cistern K770 for adults



Adult stand-up WC

Traverse inlet
(dimension centre inlet height: 345 mm)
Traverse drain
(dimension centre drain height: 180 mm)

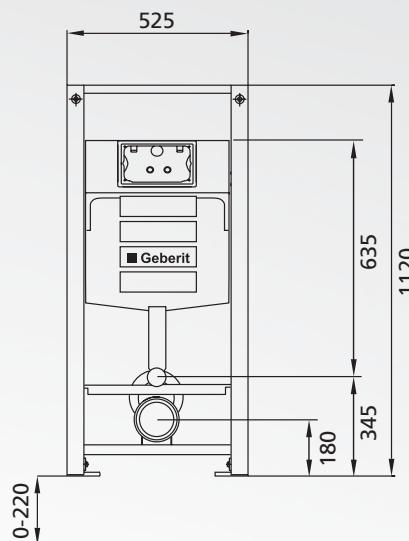

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Free-standing WC connection set white with cover rosette
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual-flush technology or
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)
Suitable for adult floor-standing WCs.

Accessories:

Accessories:
Sound-decoupled wall brackets for pre-wall installation, page 50
Flush plates and flushing systems from page 65.

Design Ref. no.

**Adult floor-standing WC
Installation height 1120 mm**

Geberit concealed cistern Sigma 211948.01
with dual flush

Burda concealed cistern K770 with dual flush




**BS+ floor-standing WC element with Geberit cistern Sigma
oder Burda cistern K770 for toddlers/children**

One element for 2 WC ceramics



NEW

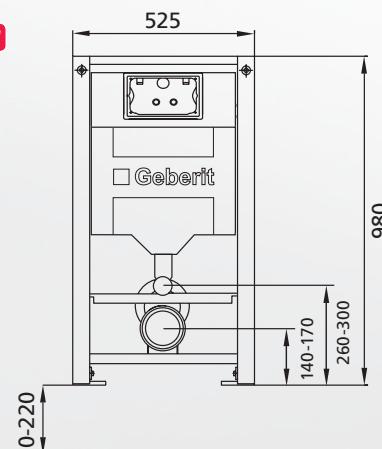

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Free-standing WC connection set white with cover rosette
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual-flush technology or
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 980 / 160 mm (with waste pipe)
Suitable for Toddlers/children Floor standing-WC

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50
Flush plates and flushing systems from page 65.

Design Ref. no.


**Toddlers/children Floor standing-WC
Installation height 980 mm**

Geberit concealed cistern Sigma 211947.01
with dual flush

Burda concealed cistern K770 with dual flush 211944.00



**BS+ WC element for WWC, 112cm
with Schell concealed WC flush valve Compact II**

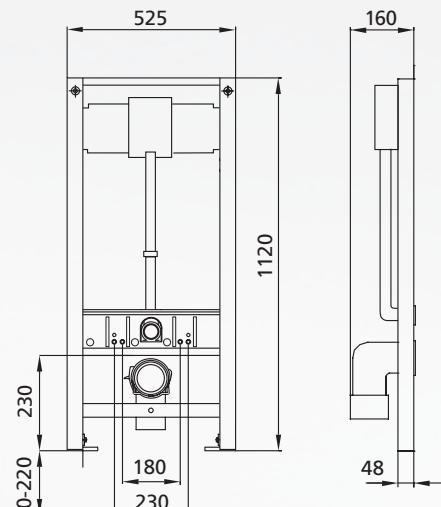

Design

Ref. no.

Schell concealed WC flush valve Compact II

211246



- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in WC concealed flush valve set Schell WC flush valve Compact II
- Pre-assembled water section made of Dr brass
- Pre-shut-off / connection G3 / 4 AG, right
- Flushing plug G3/4 AG
- Plaster cover

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)
Suitable for standard wall-hung WCs.


Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50
Flush plates and flushing systems from page 65

Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48

BS+ wall-mounted WC element for barrier-free WC facilities

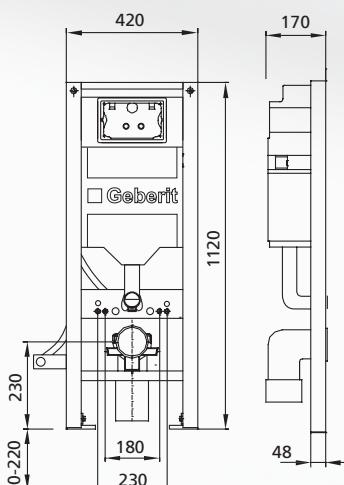

Design

Ref. no.

Design

Ref. no.

barrier-free Installation height 1120 mm

Geberit cistern Sigma with 2-quantity flush

211148.01

Geberit cistern Sigma with 2-quantity flush
Odour extraction exhaust air 50 mm prepared

220099.01

Burda cistern K770 with 2-quantity flush

211150.00

Geberit cistern Sigma with 2-quantity flush with cover plate (white)
8 cm height adjustable after tiling

211090.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced element width 420 mm
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 420 / 1120 / 170 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50
Flush plates and flushing systems from page 65

Note:


WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48

all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:
additionally compatible with Geberit
Duo-Fresh inserts (cleaning cubes)



BS+ wall-mounted WC element for barrier-free WC facilities
incl. mounting plates for folding support handles right + left

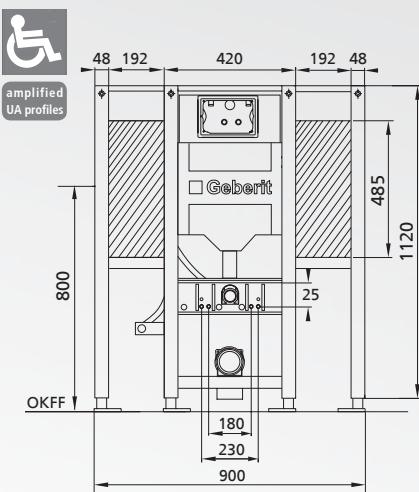

Design Ref. no.

barrier-free Installation height 1120 mm

Geberit cistern Sigma
with 2-quantity flush
Width 880 mm 211600.01

Burda cistern K770
with 2-quantity flush 211700.00

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Mounting plate right and left
- Actuation from the front

Dimensions: W / H / D 880 / 1120 / 170 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories included:

4 Sound-decoupled wall brackets for pre-wall mounting

Accessories optional:


Flush plates and flushing systems from page 65

Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48



BS+ wall-mounted WC element for barrier-free WC facilities
incl. mounting plates for hinged support handles, optionally right / left

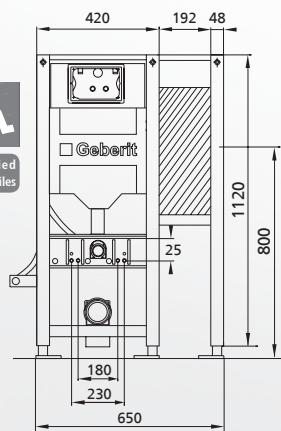

Design Ref. no.

with mounting on the right
Installation height 1120 mm

Geberit cistern Sigma
with 2-quantity flush 211606.01
Burda cistern K770
with 2-quantity flush 211303.00

Design Ref. no.

with mounting on the left
Installation height 1120 mm

Geberit cistern Sigma
with 2-quantity flush 211666.01
Burda cistern K770
with 2-quantity flush 211330.00

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Mounting plate right or left
- Actuation from the front

Dimensions: W / H / D 750 / 1120 / 170 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories included:

3 Sound-decoupled wall brackets for pre-wall mounting

Accessories optional:

Flush plates and flushing systems from page 65


Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48



BS+ WC element „Reno-Kit“

Replacement module for existing stud walls / pre-wall installations

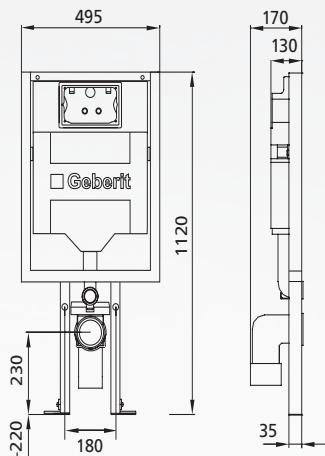

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 495 / 1120 / 170 mm (with waste pipe)
Suitable for standard wall-hung WCs.

Accessories:

Flush plates and flushing systems from page 65

Design Ref. no.

barrier-free Installation height 1120 mm


Geberit cistern Sigma with 2-quantity flush	211630.01
Burda cistern K770 with 2-quantity flush	211635.00

all WC frames with Geberit cistern:
compatible with Duravit Sensowash® and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:
additionally compatible with Geberit Duo-Fresh insert (cleaning cubes)



BS+ element for Laufen Bernina / Geberit Publica wall-mounted sinks (formerly Keramag Esprit) with concealed cistern, for wall-mounted tap

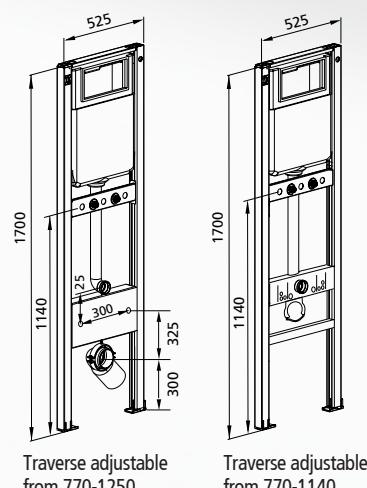

Example:
Laufen Bernina

Example:
Geberit Publica

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211061, 211062) with integrated or separate angle valve
- 2 sound-decoupled, width-adjustable 1/2" wall ducts
- Actuation from the front

Dimensions: W / H / D 525 / 1700 / 160 mm (with waste pipe)

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50
Flush plates and flushing systems from page 65

Design Ref. no.

Design Ref. no.

Laufen Bernina Installation height 1700 mm


Geberit cistern Sigma with 2-quantity flush	211057.01
Geberit cistern Delta with 2-quantity flush	211061.99
Burda cistern K770 with 2-quantity flush	211065.00

Geberit Publica Installation height 1700 mm

Geberit cistern Sigma with 2-quantity flush	211060.01
Geberit cistern Delta with 2-quantity flush	211062.99
Burda cistern K770 with 2-quantity flush	211066.00



BS+ washstand element for standing fitting

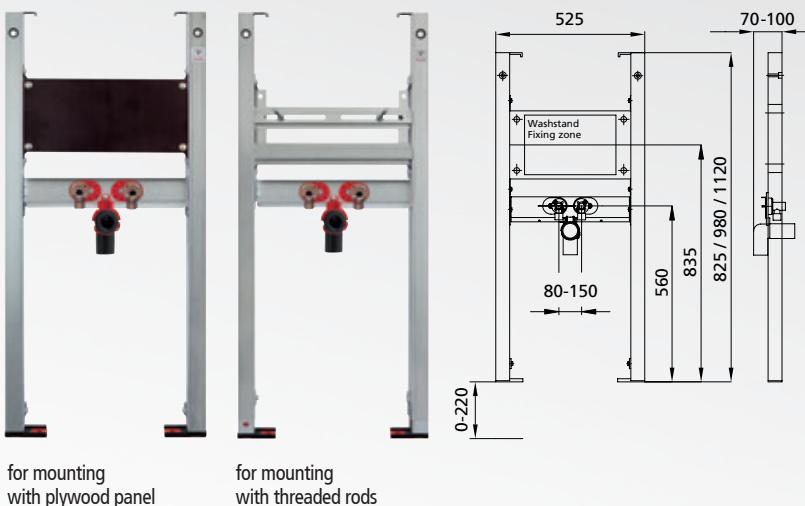

for mounting
with plywood panel

for mounting
with threaded rods

Design Ref. no.

**Installation height 825-980 mm
for standing fitting**

for fastening with plywood panel 212018.xx

For fastening with threaded rods 212218.xx

Design Ref. no.

**Installation height 1120 mm
for standing fitting**

for fastening with plywood panel 212005.xx

For fastening with threaded rods 212205.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap elbow DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 70-100 mm
(with waste pipe), WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



BS+ washstand element for wall fitting

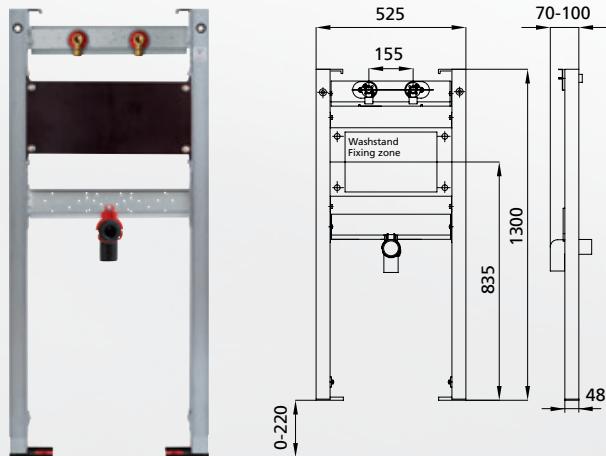

Design Ref. no.

**Installation height 1300 mm
for wall fitting**

212029.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with waste pipe)
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



BS+ in-line washstand element, 112 cm, for standing fitting

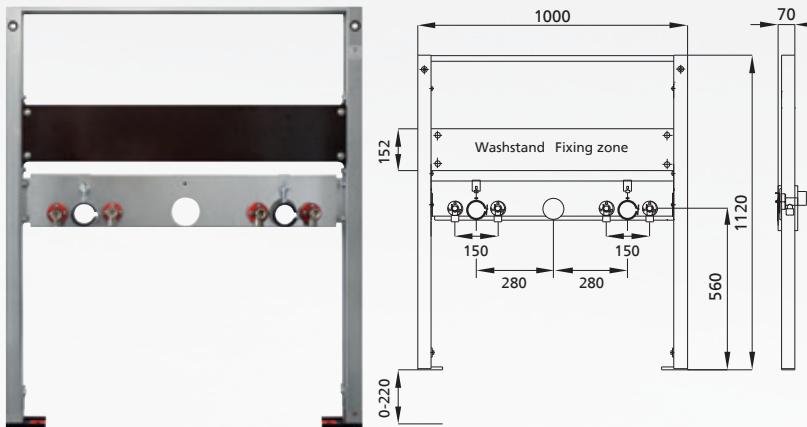


Example 212041.00

Design	Ref. no.	Design	Ref. no.
Universal Duo washstand		Universal Duo washstand	
2 x stand fittings, 1 x centre drain	212040.00	2 x stand fittings, 2 x drain	212041.00



BS+ double washstand element

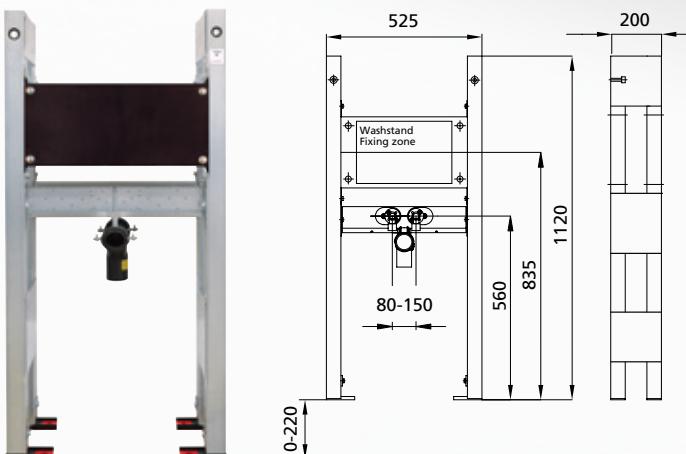

Design	Ref. no.
Installation height 1120 mm for wall fitting	212221.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Connection elbow PE-HD DN 50 mm
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 1000 / 1120 / 70 mm (with waste pipe)
On request also 825 or 980 mm height

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Please submit a drawing of the washbasin used with the order.

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- HDPE breeches branch DN 50
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 or 1120 / 200 mm (with waste pipe)
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



BS+ washstand element for concealed fitting

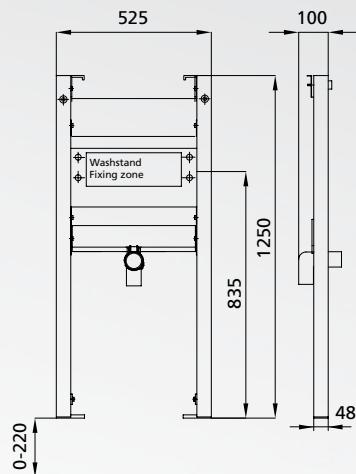

Design

Ref. no.

Installation height 1250 mm
for concealed fitting 212030.99

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm



Dimensions: W / H / D 525 / 1250 / 100 mm (with waste pipe),
WT mounting dimension max. 375 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



BS+ washstand element for water meter and concealed shut-off valve

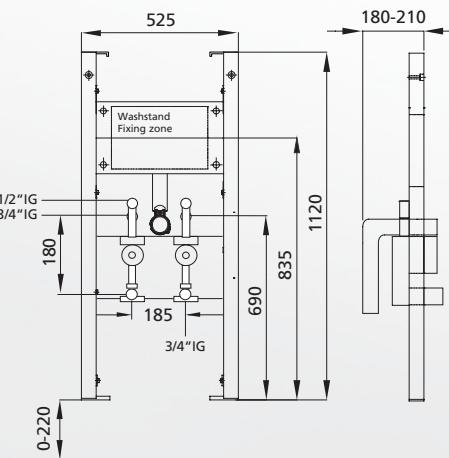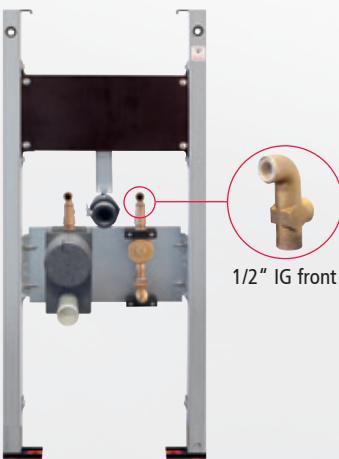

Design

Ref. no.

Installation height 1120 mm
for free-standing fitting

for 2 water meters 212028.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate
- 2 concealed fitting combinations, gunmetal water meter shut-off valves, incl. insulation, which also serves as a plastering aid, Gunmetal in accordance with DIN-EN 1982 and DIN 50930 Part 6, sealing elements made of EPDM (KTW, W270 tested), consisting of: Concealed single-pipe connection piece for MTK / MTW-NG (2" EAS) incl. dummy cover and gasket set; UP piston valve, free of dead space and low pressure loss, DIN-DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1) 2 sound-insulated brackets; 2-part polystyrene insulation Building material class B1, permissible operating overpressure PB: 10 bar Permissible operating temperature TB: 90 °C, flow medium: drinking water

Dimensions: W / H / D 525 / 1120 / 180-210 mm (with waste pipe),
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Optional:

Pre-assembled shut-off valve set of 2 pieces
Item no. 960056



**BS+ washstand element
for water meter and concealed shut-off valve**

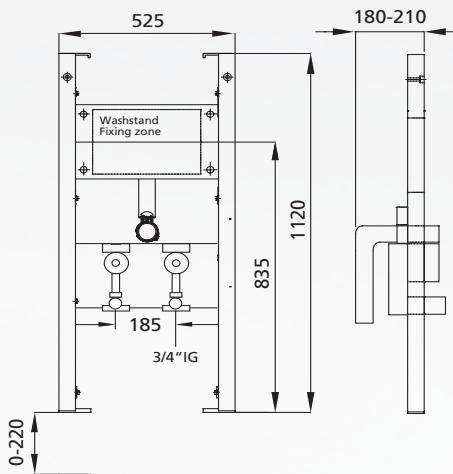

Design Ref. no.

Installation height 1120 mm
for free-standing fitting

for 2 water meters
without connections 212028.99

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate
- Upper part for the barrier, chrome
- 2 concealed fitting combinations, gunmetal water meter shut-off valves, incl. insulation, which also serves as a plastering aid, Gunmetal in accordance with DIN-EN 1982 and DIN 50930 Part 6, sealing elements made of EPDM (KTW, W270 tested), consisting of: Concealed single-pipe connection piece for MTK / MTW-NG (2" EAS) incl. dummy cover and gasket set; UP piston valve, free of dead space and low pressure loss, DIN-DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1) 2 sound-insulated brackets; 2-part polystyrene insulation Building material class B1, permissible operating overpressure PB: 10 bar Permissible operating temperature TB: 90 °C, flow medium: drinking water

Dimensions: W / H / D 525 / 1120 / 180-210 mm (with waste pipe),
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Optional:

Pre-assembled shut-off valve set of 2 pieces
Item no. 960056



**BS+ washstand element for free-standing fitting
for washstand Duravit Scola #68460, #68560**

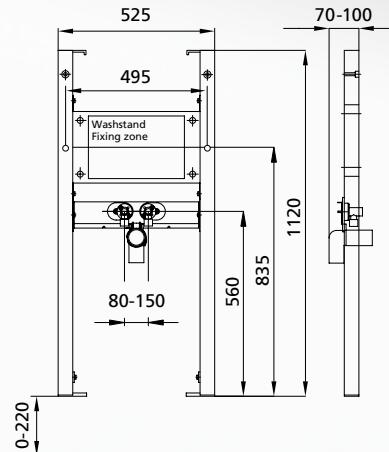

Design Ref. no.

Installation height 1120 mm
for free-standing fitting 212007.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Fixing bolt, distance 495 mm

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with waste pipe),
Surcharge for other connection types on request

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:


Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



**BS+ washstand element
for Geberit Bambini washbasins (new from April 2024)**



Example 212048.00

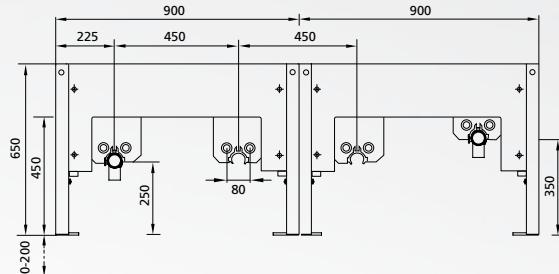

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm


Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Design	Ref. no.	Design	Ref. no.
2 washbasins, deeper basin on the left	212044.00	2 washbasins, deeper basin on the right	212045.00
3 washbasins, deeper basin on the left	212046.00	3 washbasins, deeper basin on the right	212047.00
4 washbasins, deeper basin on the left	212048.00	4 washbasins, deeper basin on the right	212049.00



**BS+ washstand element for free-standing fitting
Barrier-free design with trap**

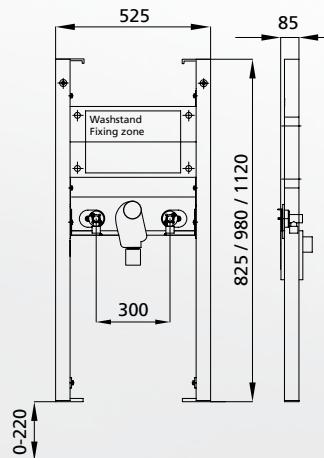

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 85 mm,
(with waste pipe), WT mounting dimension max. 375 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50


Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2" .99 without connection

Design	Ref. no.	Design	Ref. no.
Installation height 825-980 mm for free-standing fitting		Installation height 1120 mm for free-standing fitting	
Haas OHA 3500 trap	212139.xx	Haas OHA 3500 trap	212136.xx
Geberit trap	212339.xx	Geberit trap	212336.xx



BS+ washstand element for wall fitting
Barrier-free design with trap

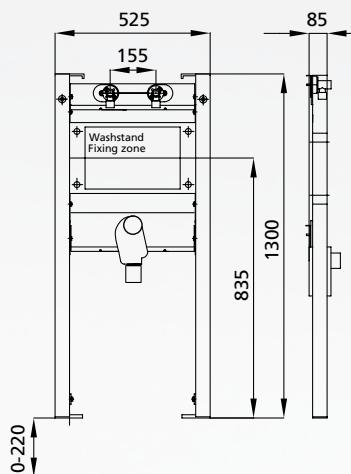

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 85 mm (with waste pipe),
WT mounting dimension max. 375 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection


Design Ref. no.

**Installation height 1300 mm
for wall fitting**

Haas OHA 3500 trap	212143.xx
Geberit trap	212343.xx



BS+ washstand element for free-standing fitting
Barrier-free design for Paracelsus/Vitalis

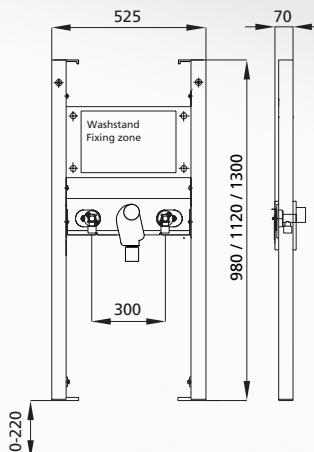

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- built-in trap
- Connecting elbow and cover white and chrome standpipe
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 980, 1120 oder 1300 / 70 mm
(with waste pipe), WT mounting dimension max. 375 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection

Design Ref. no.


Installation height 980 mm for free-standing fitting Haas OHA 3500 trap	213142.xx
Installation height 1120 mm for free-standing fitting Haas OHA 3500 trap	213138.xx
Geberit trap	213338.xx

Design Ref. no.

Installation height 1300 mm for free-standing fitting Haas OHA 3500 trap	213140.xx
Geberit trap	213340.xx



**BS+ washstand element for free-standing fitting,
Barrier-free design with concealed trap,
incl. mounting plates for folding support handles right + left**

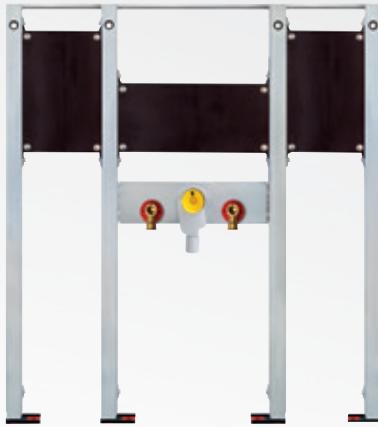


Example Urinal trap,
Haas OHA 3500

Design Ref. no.

**Installation height 1120 mm
right + left
for free-standing fitting**

Haas OHA 3500 trap 212616.xx

Geberit trap 212636.xx

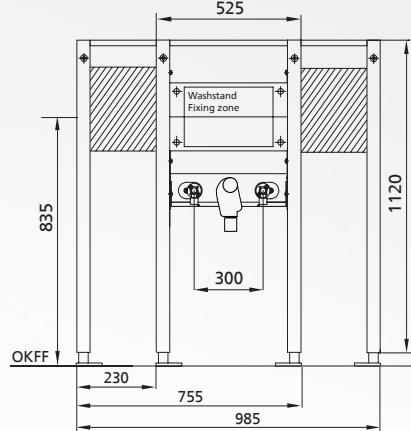

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Mounting plate left and right

Dimensions: W / H / D 985 / 1120 / 85 mm (with waste pipe), for 2 handles
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



**BS+ washstand element for free-standing fitting,
Barrier-free design with concealed trap,
incl. mounting plates for folding support handles right or left**

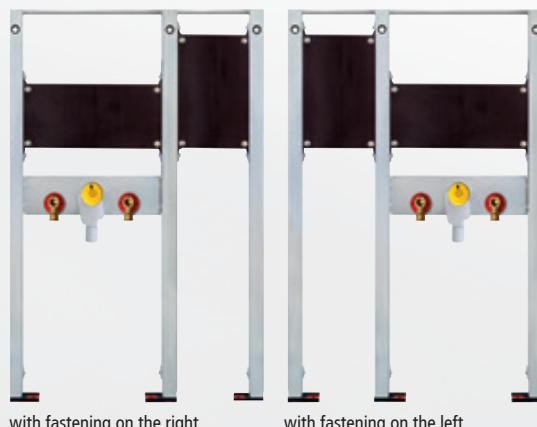


Example Urinal trap,
Haas OHA 3500

Design Ref. no.

**Installation height 1120 mm
right for free-standing fitting**

Haas OHA 3500 trap 212676.xx

Geberit trap 212696.xx

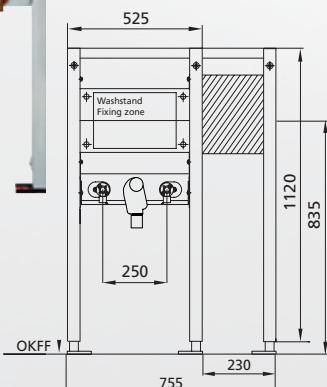

left for free-standing fitting

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Mounting plate left or right

Dimensions: W / H / D 755 / 1120 / 85 mm (with waste pipe), for 1 handle
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



BS+ sink element for wall fitting

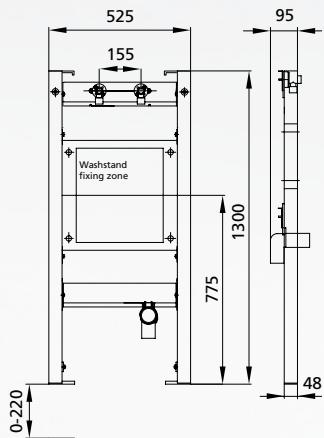

Design

Ref. no.

Installation height 1300 mm 212012.xx
for wall fitting

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable sink installation
- swivelling HT urinal trap DN 50
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 95 mm (with waste pipe),
WT mounting dimension max. 375 mm

Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



BS+ wall-mounted bidet element

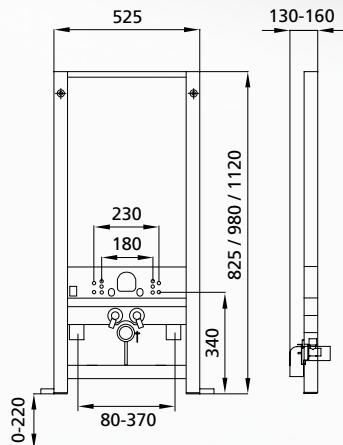

Design

Ref. no.

Installation height 825 mm 233002.xx

Installation height 980 mm 223002.xx

Installation height 1120 mm 213002.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Variable bidet ceramic fittings
- swivelling HT urinal trap DN 50
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 130-160 mm
(with waste pipe), suitable for bidets, see fitting list (enclosed in the box)

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection

Note:


With some ceramics, it may be necessary to mount the supplied clamp in the crossbar from below rather than from above, so that the abutment (absorbs the force of the ceramic) as close as possible to the back of the ceramic.

In some assembly cases, it may also be necessary the threaded rod must be shortened accordingly.

These points should be clarified beforehand by looking at the ceramic.
As the manufacturer, we do not accept any liability for incorrect installation!



BS+ urinal element
with concealed flush valve or shell set and empty element

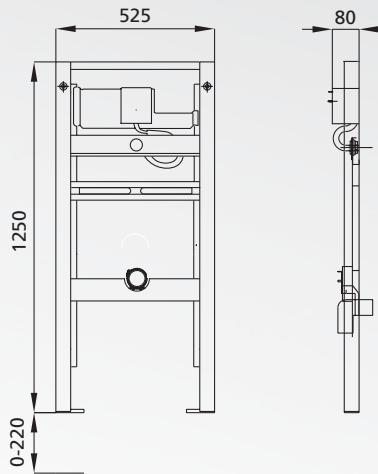

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Swivelling drain elbow DN 50
- Pre-assembled flush-mounted flush valve or pipework set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap (#255101, 255102, 255103 und 255104 ohne),
- Urinal connection set (#255101, 255102, 255103 und 255104 ohne),

Dimensions: W / H / D 525 / 1120-1250 / 80 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Suitable for urinals, see fitting list (enclosed in the box).



Design	Ref. no.	Design	Ref. no.
--------	----------	--------	----------

Installation height 1250 mm

Burda flush valve U-05/06	214029	Blank element Universal for surface-mounted flush valves/ waterless urinals	214556
Burda flush valve U-05/06 for spray head	214030		



BS+ urinal element
with flush-mounted shell set Flowtronik

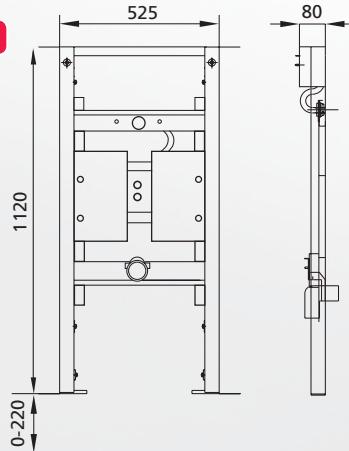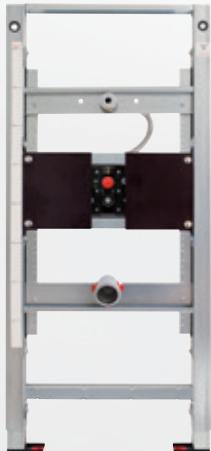

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set with 230 V connection
- Valve block with water shut-off
- Functions: Standard and stadium operation, forced flushing
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal connection set

Dimensions: W / H / D 525 / 1120 / 80 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Suitable for urinals with horizontal outlet to the rear
(vertical outlet on request), see fitting list (enclosed in the box).

Not suitable for urinals with moulded-in trap,
e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.

Design	Ref. no.
--------	----------


Installation height 1120 mm

Burda shell set Flowtronik	214800
Burda shell set Flowtronik for spray head	214801



BS+ urinal elements suitable for drywall construction and pre-wall

BS+ urinal-element with flush-mounted shell set Geberit VS

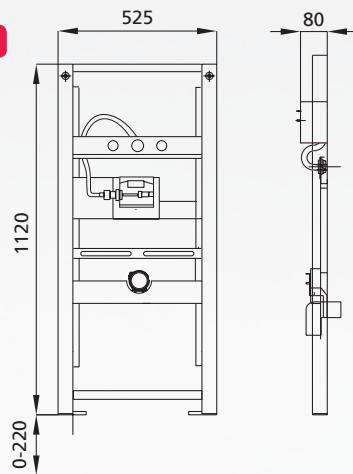

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set with 230 V connection
- Valve block with water shut-off
- Functions: Standard and stadium operation, forced flushing
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal connection set

Dimensions: W / H / D 525 / 1120 / 80 mm

Accessories:

Urinal flushing systems from page 98

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Suitable for urinals with horizontal outlet to the rear (vertical outlet on request), see fitting list (enclosed in the box).

Not suitable for urinals with moulded-in trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.

Design

Ref. no.


Installation height 1120 mm

Geberit shell set Universal for VS 214718

Geberit shell set Universal for VS for spray head 214720



BS+ urinal element with flush-mounted shell set or electronics

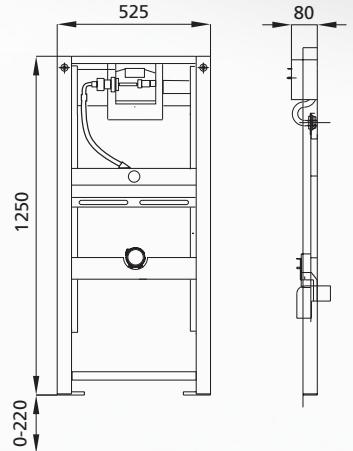

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1120 -1250 / 80 mm

Accessories:

Urinal flushing systems from page 98

Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Suitable for urinals, see passport list (enclosed in the box).

Design

Ref. no.

Design

Ref. no.

Installation height 1250 mm

Geberit shell set universal for HyTronic and HyTouch 214712 for Geberit Flushcontrol 214856

Geberit shell set universal for HyTronic and HyTouch for spray head 214714 for Duravit Utronic 214506




BS+ urinal and shower elements suitable for drywall construction and pre-wall

BS+ urinal-element with flush-mounted shell set or electronics



info on
page 79

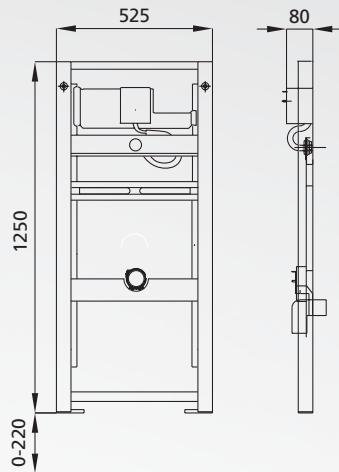

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1250 / 80 mm

Accessories:

Urinal flushing systems from page 98
Sound-decoupled wall brackets for pre-wall installation, page 50

Note:

Suitable for urinals, see passport list (enclosed in the box).

Design

Ref. no.

Design

Ref. no.

Installation height 1250 mm

with Burda shell set
for infrared electronics,
for BurdaTronic U-09



214989

Mit Burda shell set
for infrared electronics,
for BurdaTronic U-09
for spray head

214889



BS+ shower element with pre-mounted Geberit drain

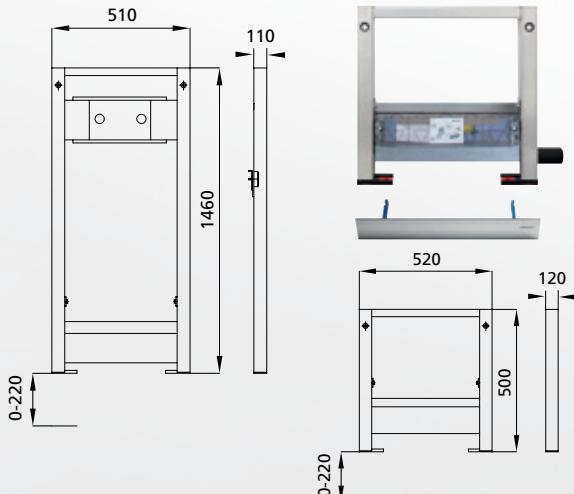

Design

Ref. no.

Design

Ref. no.

Drain DN40 for screed height
at inlet 65-90 mm
Installation height 1460 mm

for surface-mounted fittings 230120.00

for flush-mounted fittings 218010

Installation height 500 mm 230125

Drain DN50 for screed height
at inlet 90-200 mm
Installation height 1460 mm

for surface-mounted fittings 230121.00

for flush-mounted fittings 218011

Installation height 500 mm 230126

For installation in a stud wall in accordance with DIN 18183
or in conjunction with accessory set art. no. 240012 as a single
element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings
for standard flush-mounted fittings
- Pre-assembled Geberit shower drain for draining floor-level showers,
cover, plastic chrome

Dimensions: W / H / D 525 / 1460 / 80 mm,

Dimensions: W / H / D 525 / 500 / 80 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Prefabricated set for Geberit wall drain,



- Removable for cleaning
- With cover and allen key

Design

Ref. no.


brushed stainless steel 230040

brushed stainless steel (for screwing) 230041

polished stainless steel 230042



BS+ shower element for showerhead

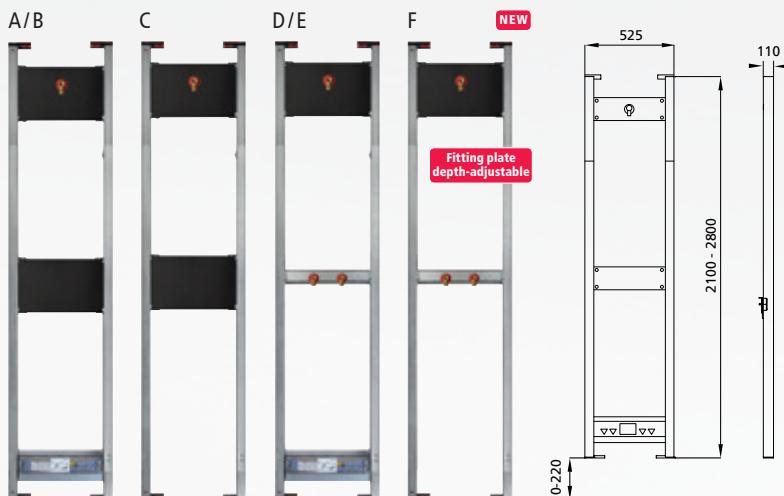

Design	Ref. no.	Design	Ref. no.
A: for concealed fittings and Geberit wall drain Drain DN40 for screed height at the inlet 65-90 mm	235300	D: for surface-mounted fittings and Geberit wall drain Drain DN40 for screed height at the inlet 65-90 mm	235350.00
B: for concealed fittings and Geberit wall drain Drain DN50 for screed height at the inlet 90-200 mm	235301	E: for surface-mounted fittings and Geberit wall drain Drain DN50 for screed height at the inlet 90-200 mm	235351.00
C: for concealed fittings	235200	D: for surface-mounted fittings	235250.00

For installation in a stud wall in accordance with DIN 18183 or in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings
- Crossbar for shower head
- Pre-assembled Geberit shower drain SH 30, sealing water height 30 mm, Drain DN40, for draining floor-level showers, cover Chrome plastic


Taverses are height and depth adjustable 40-110mm
Dimensions: W / H / D 525 / 2100 - 2800 / 110 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



BS+ bathtub element

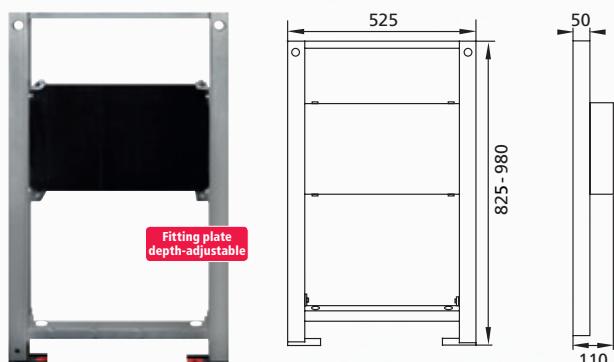

Design	Ref. no.
bathtub element	235400

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings

Taverses are height and depth adjustable 40-110mm
Dimensions: W / H / D 525 / 825-980 / 110 mm

Installation Height 1120 mm also possible on request!



BS+ element for built-in wardrobe
for the installation of instantaneous water heaters



- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm for mounting **cuccoo** built-in furniture

Element for built-in cabinet for instantaneous water heater

- Wall bushings 1/2"
- Cut-out for flush-mounted electrical box

Dimensions: W / H 450 / 1120 mm

Built-in cabinet for instantaneous water heater

White silk matt lacquered front, door hinge right or left
Dimensions: W 300 mm

All wardrobe elements suitable for Burda **cuccoo** furniture series

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Design Ref. no.

Element for instantaneous water heater cabinet	215010.00
Built-in wardrobe 30 cm	403160
Element for Toilet brush cabinet	215007.00



BS+ element for built-in wardrobe with integrated toilet brush



- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm for mounting **cuccoo** built-in furniture

Element for built-in cabinet for toilet brush

Dimensions: W / H 350 / 1120 mm

Built-in cabinet with integrated toilet brush

White silk matt lacquered front, incl. one glass shelf and brush holder with brush in chrome, door hinge right or left
Dimensions: W 200 mm

All wardrobe elements suitable for Burda **cuccoo** furniture series

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

Design Ref. no.

Built-in wardrobe 20 cm with integrated toilet brush	403055
------------------------------------------------------	--------

Cabinet elements on request
also in 60 cm width,
90 cm width and 120 cm height,
80 cm height available




BS+ Fastening elements

For mounting grab rails, support rails and folding handles or folding shower seats



element for mounting a folding shower seat

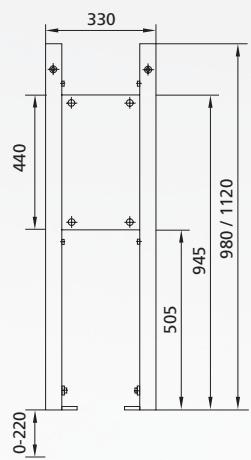

Design Ref. no.

Design Ref. no.

Retaining element for support and folding handles

Installation height 980 mm 241022

Installation height 1120 mm 240022

Retaining element for folding shower seat

Installation height 1120 mm 242022

For holding, supporting and folding handles et cetera

For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- Built-in mounting plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 330 / 980 or 1120 / 50 mm

Element to accommodate a folding shower seat

For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- Built-in mounting plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 850 / 1120 / 50 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



BS+ element for surface-mounted / concealed fittings

A B C



Design Ref. no.

Installation height 1120 mm

A: for flush-mounted fittings 218008

B: for surface-mounted fittings 230108.xx

C: Wall fitting for showers and bathtub 230109

For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings



Dimensions: W / H 525 / 1120 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



Universal traverse for surface-mounted / flush-mounted fittings
ventilation, sanitary flushes and other built-in appliances

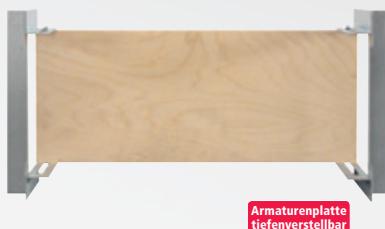

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories


Dimensions: W / H / D 575 / 275 / 50-150 mm

Design Ref. no.

215033



BS+ Universal traverse
for surface-mounted taps / tap valve
heavy duty / reinforced



- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Sound-decoupled, width-adjustable 1/2" wall ducts

Dimensions: W / H / D 525-575 / 180 / 38 mm


Design Ref. no.

A: with 2 wall ducts 215006.00

B: with 1 wall duct 216210.00



BS+ universal traverse
for surface-mounted taps / tap valve

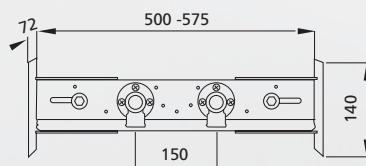

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Sound-decoupled wall discs 1/2"

Dimensions: W / H / D 500-575 / 140 / 72 mm

Design Ref. no.


A: with 2 wall ducts 215005.00

B: with 1 wall duct 216209.00



BS+ traverse suitable for drywall construction

BS+ traverse for washing machine



- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Urinal trap WM and wall disc 1/2"


Dimensions: W / H / D 500-575 / 140 / 72 mm



Design Ref. no.

with urinal trap WM 216004
and 1/2" connection

BS+ Traverse for kitchen sink

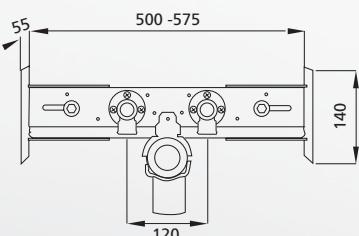

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Two sound-decoupled wall discs 1/2"
- Drain elbow DN50

Dimensions: W / H / D 500-575 / 140 / 72 mm




Design Ref. no.

with wall discs 216100.00
and drain elbow DN50

with drain elbow DN50 215013

BS+ traverse for flush-mounted fittings / flush-mounted valves



- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories


Dimensions: W / H / D 525-575 / 220 / 72 mm

Design Ref. no.

with 4 sound-decoupled
pipe clamps to hold the
concealed valves 216003



BS+ traverse for water meter

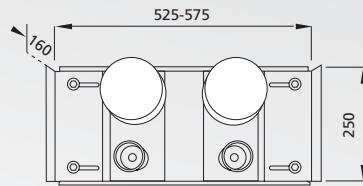

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- 2 flush-mounted single-pipe connection piece for MTK / MTW-NG (2" EAS KOAX) incl. dummy cover and gasket set
- 2 Concealed piston valve, free of dead space and low pressure loss (DIN DVGW tested with sound insulation to DIN 4109 (fitting group 1))
- 4 sound-insulated brackets
- 2 two-part polystyrene insulations - building material class B1 (permissible operating overpressure PB: 10 bar, permissible operating temperature TB: 90°C, flow medium: drinking water)

Dimensions: W / H / D 525-575 / 250 / 160 mm

Design Ref. no.
215015



BS+ Washbasin traverse for floor-standing tap



Design	Ref. no.	Design	Ref. no.
Version A with mounting plate made of plywood	230300.xx	Version B with fastening via threaded rods	230301.xx

For installation in a stud wall in accordance with DIN 18183.

- Galvanised sheet metal construction
- Mounting plate for variable washbasin installation
- swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and installation accessories
- Fitting plate to hold the wall discs
- 2 sound-decoupled connection mountings
- Wall discs 1/2"

Version A Dimensions: W / H / D 525 / 485 / 70 mm

Version B Dimensions: W / H / D 525 / 485 / 50 mm


Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"
.99 without connection



BS+ universal mounting plate

For holding, supporting and folding handles



Design Ref. no.
240015

For holding mirrors, shelves, grab rails, support and folding handles et cetera


For installation in a stud wall in accordance with DIN 18183.

- Galvanised sheet metal construction
- built-in mounting plate made of plywood (245 mm high, 30 mm thick) for individual fastening of heavy loads
- All mounting and installation accessories

Dimensions: Plywood panel W / H / D 625 / 245 / 30 mm
With fixing bracket W / H / D 625 / 685 / 30 mm



BS+ right / left holding element with one foot for holding, supporting and folding handles



Design	Ref. no.
Installation height 980 mm right	240043
left	240044

Design	Ref. no.
Installation height 1120 mm right	240023
left	240024



Can be used for installation in a pre-wall.

- Galvanised, self-supporting and sound-decoupled steel construction, with one profile, with built-in fastening plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 230 / 980 oder 1120 / 50 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

BS+ / Santro WC support brackets for WC ceramics with a small contact surface



Design	Ref. no.
1 Paar	216400



For additional support of WC ceramics
Support surfaces smaller than 17 cm (e.g. Flaminia, Sentique)

Side end element right / left



Design	Ref. no.
Installation height 825 mm right/left	on request
Installation height 980 mm right/left	on request
Installation height 1120 mm right/left	219001

Can be used for installation in a pre-wall.

For extending an extension section and for bridging distances distances over 625 mm wide between sanitary modules et cetera

- Galvanised, self-supporting and sound-decoupled steel construction, with one profile, with built-in fastening plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 48 / 825, 980 oder 1120 / 48 mm

Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



BS+ extension for wall bracket
for wall mounting (240008 and 240012) up to 400 mm



Design Ref. no.
240010



BS+ extended feet




Design Ref. no.
For floor construction 215101
up to 400 mm (1 pair)
For floor construction 215100
up to 600 mm (1 pair)



- For raised floor construction
- Suitable for all BS+ elements
- Version: In pairs
- Galvanised with plastic feet

BS+ corner mounting set



Design Ref. no.
1 pair 218106

For mounting BS+ units as a 45° corner solution.

- Galvanised mounting bracket
- Additional upper corner planking support
- All mounting and assembly accessories



Sound-decoupled wall bracket for front wall mounting,
mounting depth 140 -190 mm extendable



Premium wall bracket (since January 2018)



Wall bracket

New version

- 2 sound-decoupled wall supports M10
- All mounting and assembly accessories
- 2 support brackets

Old version

- 2 sound-decoupled wall supports M10
- All mounting and assembly accessories

Design Ref. no.

Premium wall bracket 240012

Wall bracket 240008



BS+ foot mounting on rear wall
e.g. for underfloor heating



- 2 galvanised wall supports
- All mounting accessories

Design Ref. no.

1 pair 240020



universal mounting set



e.g. mounting on the wall

- 2 sound-decoupled wall supports M10
- All mounting and assembly accessories

Design Ref. no.

1 pair 240040



03 – 18 **Santro** Pre-planked prewall system



19 – 50 **BS+** Dry construction system



51 – 54 **Burda-Block**



55 – 58 **my move elements** Electrically height-adjustable



59 – 64 **Kombiset** Wet construction system



65 – 78 **Flush buttons**



79 – 94 **Flushing systems**



Burda Block-System

Burda Vorwand-Block-System


1.1 Einsatzbereich

- Vorwandinstallation Nassbau
- Vorwandinstallation Trockenbau
- Inwandinstallation Trockenbau



1.2. Aufbau

Verzinkte Profilzargenkonstruktion mit körperschallentkoppelten Einbauteilen (Spülsysteme, Armaturen, Leitungen), wählbarem Abwasseranschluss und stufenlos verstellbaren Standfüßen.

Leistung und Technik am Beispiel des Burda-Block für Wand-WC

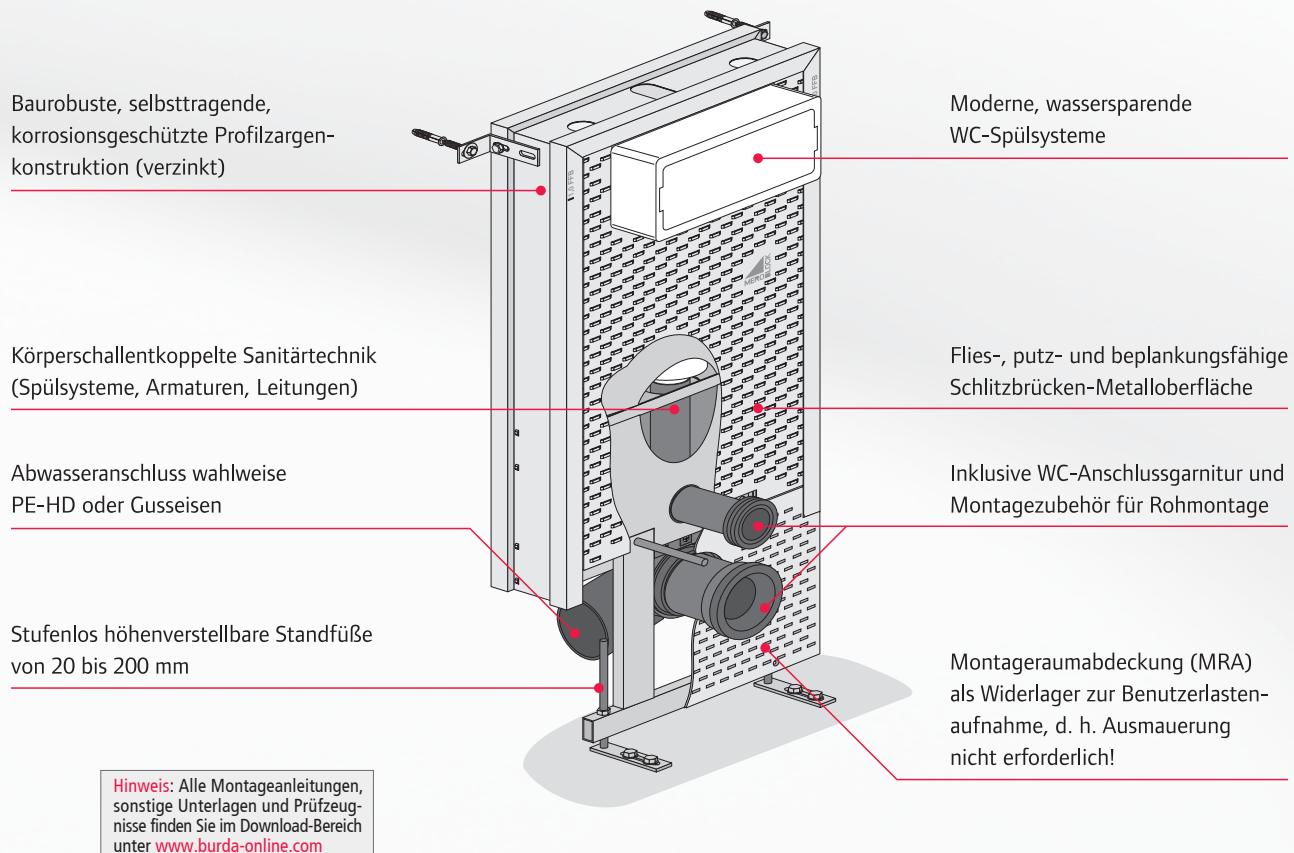

Burda-Block wall-mounted WC element

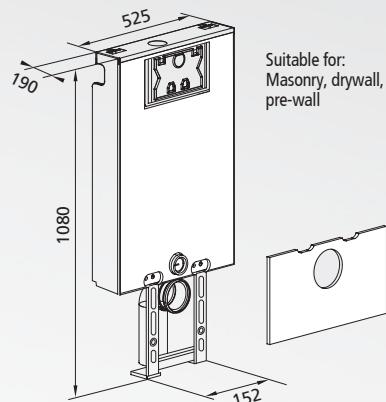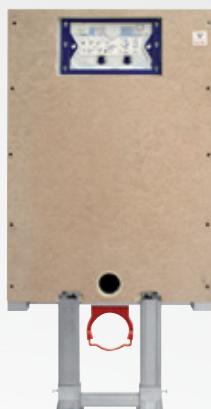

Design

Ref. no.

Geberit concealed cistern Sigma with 2-quantity flush 400008.01

- galvanised, self-supporting steel construction
- Surface ready for tiling
- WC ceramic fixings 180 and 230 mm
- swivelling outlet elbow DN 80 / 100
- Wall-mounted WC connection set
- Built-in, fully insulated concealed cistern
- 2-quantity flush technology
- Angle valve, 1/2
- Construction protection for the inspection opening
- Building plugs for inlet and outlet
- All installation accessories
- Adjustable footrests up to 260 mm
- Cistern connection bracket 1/2' with angle valve and connection hose
- Installation space cover

Dimensions: W / H / D 525 / 1080 / 190 mm

all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:
additionally compatible with Geberit
Duo-Fresh inserts (cleaning cubes)



03 – 18 Santro Pre-planked prewall system



19 – 50 BS+ Dry construction system



51 – 54 Burda-Block combined wet and dry construction system



55 – 58 my move elements my move WC page 56-57
my move WT page 58



59 – 64 Kombiset Wet construction system



65 – 78 Flush buttons





79 – 94 Flushing systems



my move WC comfort for barrier-free WC facilities
with electric height adjustment



suitable for: pre-wall

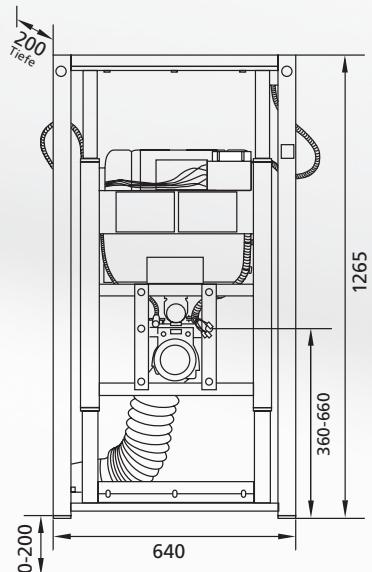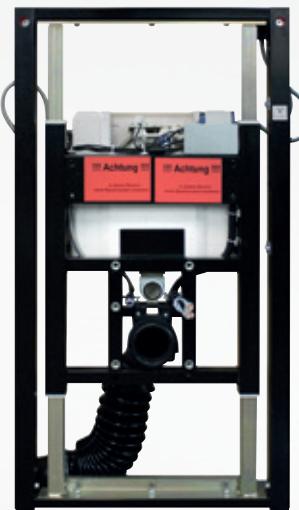

Design	Ref. no.	Design	Ref. no.
my move WC comfort	270001		
Individual glass panel colour according to RAL	270003	Preparation for inclusion of shower toilet	270010
Panelling for individual installation RAL Classic colours	270005	External button „up/down“	270008
Panelling for individual installation RAL Design colours	270007	External button „flush“	270009

scope of delivery

Self-supporting drywall element made of powder-coated, self-supporting steel construction for wall and floor mounting incl. fixing material.

(Sound-decoupled with premium wall bracket) for floor structures 0-20 cm with prefabricated internal drinking water and waste water pipework, as well as internal electrical wiring

without support handles

- With concealed cistern K840
- With electric lifting device for WC
- With glass top RAL 9003, signal white, W/H: 500 x 1045 mm
- With radio remote control
- With fibre-reinforced, core-impregnated plasterboard front (2-ply) with all control openings
- Stainless steel protection plate for inspection work

technical data

- WC attachment 180 mm
- WC 30 cm height-adjustable
- Load capacity up to 350 kg

connections:

Electrical connection: via Schuko plug (230 V AC, 50-60 Hz)

Waste water connection: DN 90, Drinking water connection: R1/2"

optional

- Individual glass panel colour according to RAL
- Panelling for individual installation RAL Classic colours
- Panelling for individual installation RAL Design colours
- Preparation for inclusion of shower toilet
- External button „up/down“
- External button „flush“


Dimensions: W / H / D 640 / 1265 / 200 mm

compatible with Duravit Sensowash®

compatible with Geberit AquaClean



my move WC care for barrier-free WC facilities
with electric height adjustment **with folding support handles**

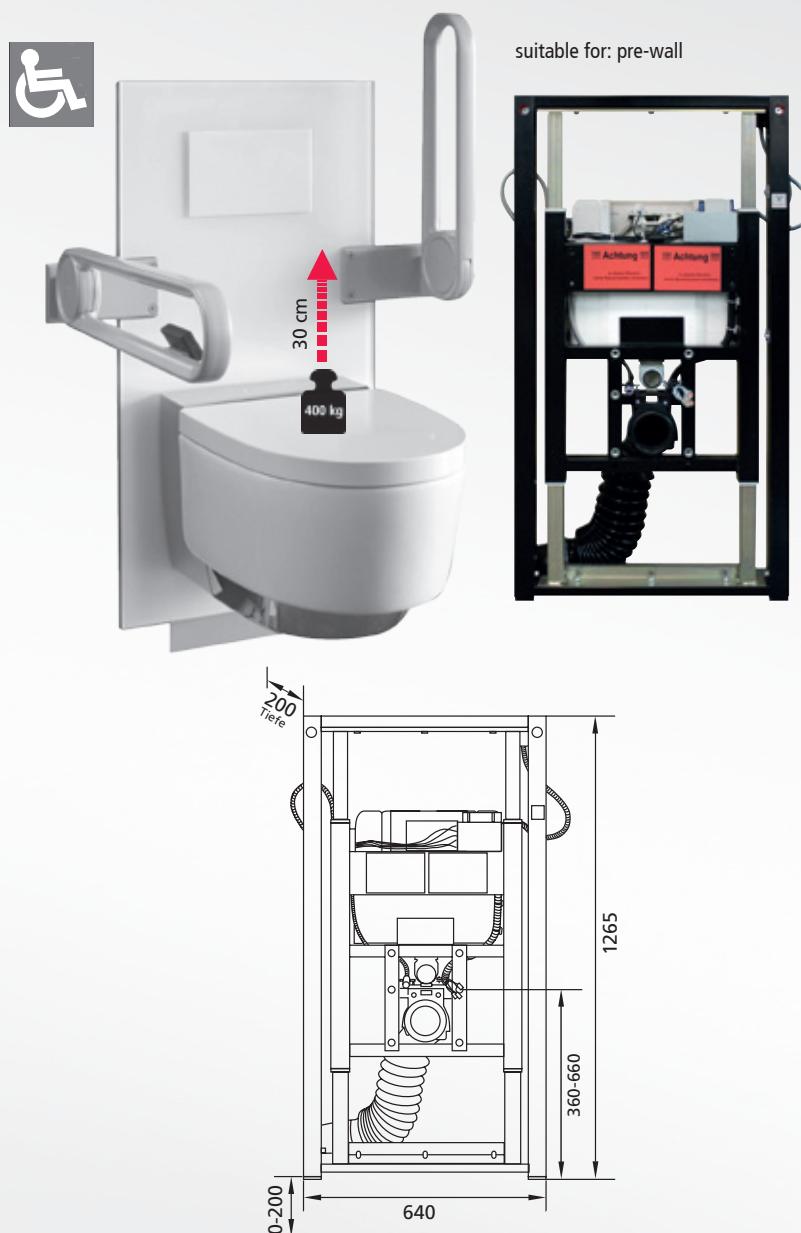

Design	Ref. no.	Design	Ref. no.
my move WC care	270002		
individual glass panel colour according to RAL	270003	External button „up/down“	270008
Panelling for individual installation RAL Classic colours	270005	External button „flush“	270009
Panelling for individual installation RAL Design colours	270007	Back support	270012
Preparation for inclusion of shower toilet	270010	Second paper roll holder	270013
		Second control on the folding support handle (up / down / rinse)	270014

scope of delivery

Self-supporting drywall element made of powder-coated, self-supporting steel construction (see my move comfort)

with folding support handles type 700

- With concealed cistern K840
- With electric lifting device for WC
- With glass top RAL 9003, signal white, W/H: 500 x 1045 mm
- With radio remote control
- With fibre-reinforced, core-impregnated plasterboard front (2-ply) with all standard openings
- WC attachment 180 mm
- Stainless steel protection plate for inspection work
- 2 x Normbau folding support handles, cavere type, Colour silver-metalllic (similar to RAL 9006) 1 x paper roll holder, 1 x WC release included (side according to customer specification)

technical data and connections: (see my move comfort)

optionally available at no extra charge

- Folding support rails type 600 or type 800

optionally available at an extra charge

- Individual glass panel colour according to RAL
- Panelling for individual installation RAL Classic colours
- Panelling for individual installation RAL Design colours
- Preparation for inclusion of shower toilet
- External button „up/down“
- External button „flush“
- Back support
- Second paper roll holder
- Second control on the folding support handle (up / down / rinse)

Dimensions: W / H / D 640 / 1265 / 200 mm

compatible with Duravit Sensowash®



compatible with Geberit AquaClean



my move WT comfort for barrier-free washstand systems
with electric height adjustment **for on-site washstand**



suitable for: pre-wall

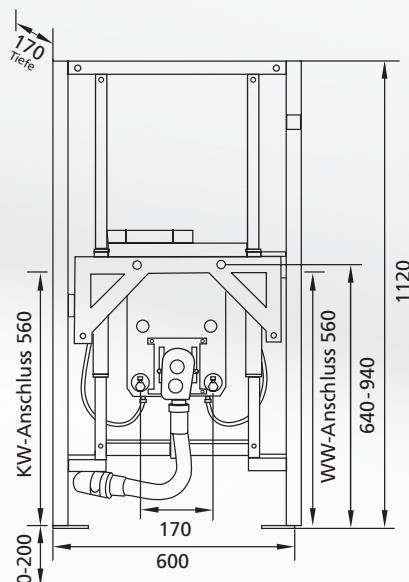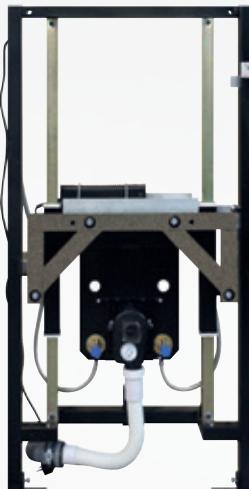

Design	Ref. no.	Design	Ref. no.
my move WT comfort for on-site washbasin Installation height 1120 mm	270501		
Individual glass panel according to RAL	270505	Panelling for individual installation RAL Classic colours	270508
Glass panel with mirror Total W/H 700 x 1450 mm mirror W/H 700 x 690 mm	270506	Panelling for individual installation RAL Design colours	270515
Glass panel with mirror Total W/H 700 x 1630 mm mirror W/H 700 x 870 mm	270513	External button „up/down“	270516

scope of delivery

Self-supporting drywall element made of powder-coated, self-supporting steel construction for wall and floor fastening incl. fastening material.

(sound-decoupled with premium wall bracket) for floor structures 0-20 cm with prefabricated internal drinking water and waste water pipework, as well as internal electrical wiring

- Concealed washstand trap
- Two wall discs
- Glass panel RAL 9003, signal white, W/H: 700 x 1000 mm
- Radio remote control for automatic height adjustment
- Fibre-reinforced, core-impregnated plasterboard front (2-ply) with all standard openings for on-site tiling

Technical data

- Washstand attachment 280 mm
- Washstand 30 cm height-adjustable

Connections:

Electrical connection: via Schuko plug (230 V AC, 50-60 Hz)
Waste water connection: DN 50, DHW and DHW connection: R1/2"

optional

- Individual glass panel colour according to RAL
- Glass panel with mirror,
Total W/H 700 x 1450 mm, mirror W/H 700 x 690 mm
- Glass panel with mirror,
Total W/H 700 x 1630 mm, mirror W/H 700 x 870 mm
- Panelling for individual installation RAL Classic colours
- Panelling for individual installation RAL Design colours
- External button „up/down“

Dimensions: W / H / D 640 / 1120 / 170 mm



View without
integrated mirror



03 – 18 **Santro** Pre-planked prewall system



19 – 50 **BS+** Dry construction system



51 – 54 **Burda-Block** combined wet and dry construction system



55 - 58 **my move elements** Electrically height-adjustable



59 – 64 **Kombiset** WC page 60-61
Carrying supports page 61 urinal page 62-63



65 – 78 **Flush buttons**




79 – 94 **Flushing systems**



Kombiset WC-elements suitable for wet construction

Kombiset WC-element with concealed cistern

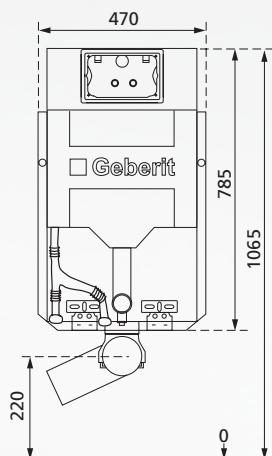

- Mounting unit, galvanised with four fixing points
- Built-in, condensation-insulated concealed cistern
- Ceramic fixing M12, distance 18 or 23 cm
- Drain fastening
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Building protection for the inspection opening
- Water connection 1/2" sink with integrated angle valve

Dimensions: W / H / D 470 / 1065 / 120 mm

Accessories:

Flush plates and flushing systems from page 59

Support brackets: Page 55

Design

Ref. no.

Design

Ref. no.

with Geberit cistern Sigma
with 2-quantity flush

511109.01

**Kombiset eco as above,
but without
individual packaging**

511117.01

Burda cistern K770
with 2-quantity flush

511114.00


with Geberit cistern Sigma
with 2-quantity flush

all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC-racks with Geberit cistern Sigma:
additionally compatible with Geberit
Duo-Fresh inserts (cleaning cubes)



Kombiset WC TS with carrying supports

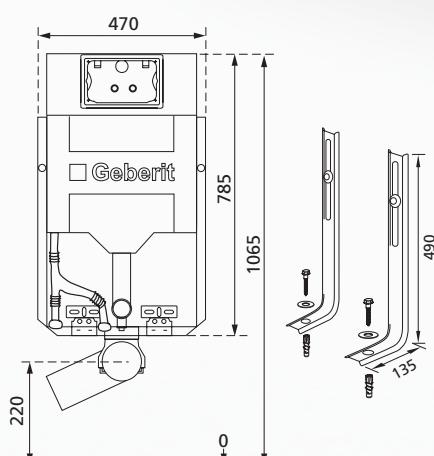

- Mounting unit, galvanised with four fixing points
- Built-in, condensation-insulated concealed cistern
- Ceramic fixing M12, distance 18 or 23 cm
- Drain fastening
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Building protection for the inspection opening
- Water connection 1/2" AG with integrated angle valve
- incl. support brackets

Dimensions: W / H / D 470 / 1065 / 120 mm

Accessories:

Flush plates and flushing systems from page 59

Support brackets: Page 55

Design

Ref. no.

with Geberit cistern Sigma
with 2-quantity flush


511118.01

all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC-racks with Geberit cistern Sigma:
additionally compatible with Geberit
Duo-Fresh inserts (cleaning cubes)



Kombiset WC Geberit 82,5 cm with concealed cistern

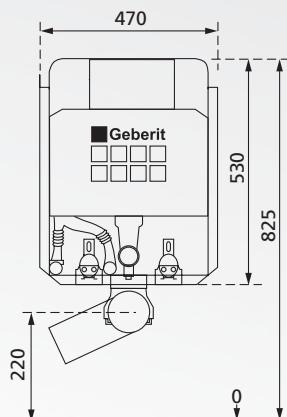

Design

Ref. no.

Installation height 825 mm

with Geberit cistern Omega 511890.00
Actuation from the front/top

- Mounting unit, galvanised with four fixing points
- Built-in, condensation-insulated concealed cistern Geberit Omega
- Ceramic fixing M12, distance 18 or 23 cm
- Drain fastening
- Connection bend made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Building protection for the inspection opening
- Water connection 1/2" sink with integrated angle valve

Dimensions: W / H / D 470 / 825 / 140 mm

Accessories:

Flush plates and flushing systems from page 59
Support brackets: Page 55

Note:


The toilet lid only remains in the open position if the distance between the wall and the toilet lid is > 25 mm.
When using WC ceramics such as those from Keramag: Renova No. 1, Comprimo 204550, Joly 203060, V&B: Viala 765310, Viala 765210, the flush plate must be installed from above.



carrying supports
TS



carrying supports
TSU

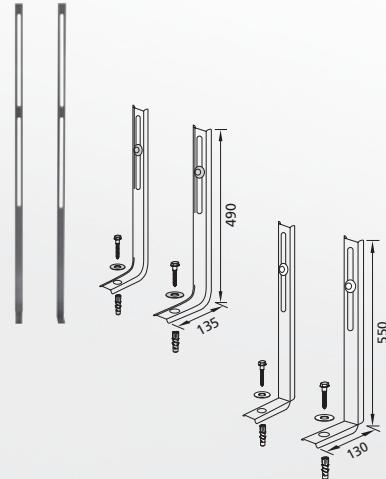

carrying supports TS

Installation aid for free-standing installation of the Kombiset WC elements or to support the load of the WC ceramic appliance.

carrying supports TSV

Installation aid for free-standing installation of the Kombiset WC elements or to support the load of the WC ceramic appliance. However, extended by 100 mm for barrier-free WCs or for raised screed.

carrying supports TSU

Installation aid for free-standing installation of the kombiset urinal elements or to support the load of the urinal ceramic.


Design

Ref. no.

carrying supports TS, 1 pair 550039
carrying supports TSV, 1 pair 550022
carrying supports TSU, 1 pair 550046



Kombiset urinal with flush-mounted flush valve or shell set

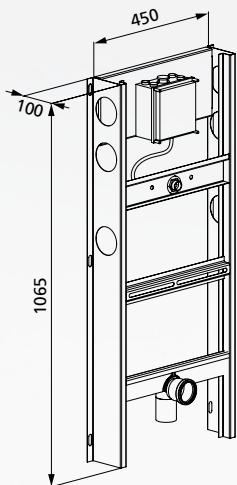

Complete pre-assembled installation unit for brickwork made of galvanised steel frame, with fixing material, DN 50 drainage elbow and urinal attachment

- All urinal fastening material
- Drain elbow DN 50
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

Accessories:



Flushing systems for urinals from page 78

Design Ref. no.

Burda flush valve U-05/06	542054
Burda flush valve U-05/06 for spray head	542055



Kombiset urinal with concealed shell set for Flowtronik

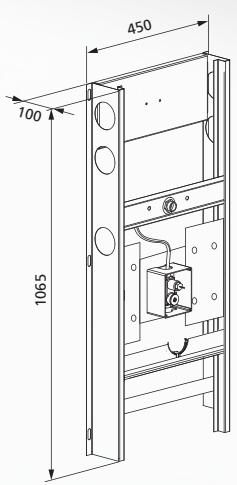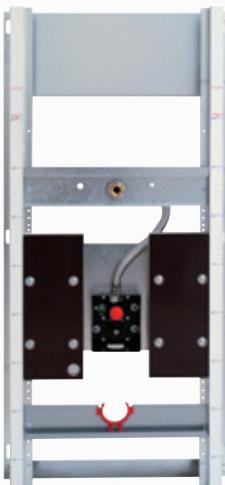

Complete pre-assembled installation unit for brickwork made of galvanised steel frame.

- All urinal fastening material
- Drain elbow DN 50
- Flowtronik shell set with 230V connection
- Valve block and water shut-off
- Functions: Standard and stadium operation, forced flushing
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

Accessories:

Flushing systems for urinals from page 78

Note:


Not suitable for urinals with moulded-in suction trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00.

Design Ref. no.

540000	Attention! When using a stainless steel urinal please contact our hotline in advance 0211/95001-0 beforehand!
540001 for spray head	



Kombiset urinal for Geberit Flushcontrol / Duravit Utronic

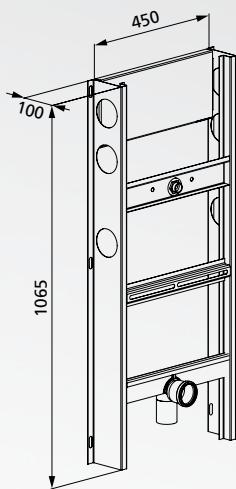

Complete pre-assembled installation unit for brickwork made of galvanised steel frame.

- All urinal fastening material
- Drain elbow DN 50
- Electronics or shell set
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

Note:

Not suitable for urinals with moulded-in suction trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00.

Design

Ref. no.

Design

Ref. no.

Installation height 1065 mm

shell set

for Geberit Flushcontrol 543121

for Geberit Flushcontrol 543122
for spray head


shell set

for Duravit Utronic 543141

for Duravit Utronic 543142
for spray head



Kombiset urinal with concealed shell set

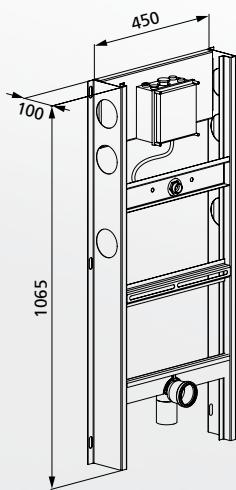

Complete pre-assembled installation unit for brickwork made of galvanised steel frame.

- All urinal fastening material
- Drain elbow DN 50
- Electronics or shell set
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

Accessories:

Flushing systems for urinals from page 78

Note:

Not suitable for urinals with moulded-in suction trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00.

Design

Ref. no.

Design

Ref. no.

Installation height 1065 mm

shell set

Geberit shell set universal 523623
for HyTronic and HyTouch

Geberit shell set universal 523624
for HyTronic and HyTouch
for spray head

Installation height 1065 mm

version with integrated control unit

Burda shell set with infrared 543112.60
electronic BurdaTronic U-09

Burda shell set with infrared 543114.60
electronic BurdaTronic U-09
for spray head



03 – 18 Santro Pre-planked prewall system



19 – 50 BS+ Dry construction system



51 – 54 Burda-Block combined wet and dry construction system



55 - 58 my move elements Electrically height-adjustable



59 – 64 Kombiset Wet construction system



Burda page 66-71
Geberit page 72-77

Schell page 77



79 – 94 Flushing systems



Flush buttons Burda

Flush button T610



Design	Ref. no.
White	610.00
Polished chrome finish	610.51
Matt chrome finish	610.50

**Suitable for concealed cistern K610
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

210003, 211017, 211021, 211053, 211419, 211500, 211505, 211555, 211945, 211945, 400017, 510003, 610001, 611101, 611131, 611212, 611231, 611411, WC13-35-23, WC22-35-23, WC33-35-21, WC3-35-21, WC5-35-26, WC5-35-27

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T611



Design	Ref. no.
White	611.00
Polished chrome finish	611.51

**Suitable for concealed cistern K610
1-quantity flush, flush/stop, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic/stainless steel

Suitable for the following elements:

210003, 211017, 211021, 211053, 211419, 211500, 211505, 211555, 211945, 211945, 400017, 510003, 610001, 611101, 611131, 611212, 611231, 611411, WC13-35-23, WC22-35-23, WC33-35-21, WC3-35-21, WC5-35-26, WC5-35-27

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T620



Design	Ref. no.	Design	Ref. no.
White	620.00	Polished / Polished chrome finish	620.51
White / Matt chrome finish	620.69	Matt / Matt chrome finish	620.50
White / Polished chrome finish	620.70	Polished chrome finish / White	620.68
		Stainless steel look	620.60

**Suitable for concealed cistern K610
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

210003, 211017, 211021, 211053, 211419, 211500, 211505, 211555, 211945, 211945, 400017, 510003, 610001, 611101, 611131, 611212, 611231, 611411, WC13-35-23, WC22-35-23, WC33-35-21, WC3-35-21, WC5-35-26, WC5-35-27

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T752



Design	Ref. no.
White	752.00
Matt chrome finish	752.50

Suitable for concealed cistern K750
1-quantity flush, flush/stop, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic


Suitable for the following elements:

WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00,
211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under
end number 99 possible at an extra charge. Please send file as vector graphic,
eps or similar.



Flush button T753



Design	Ref. no.
White	753.00
Polished chrome finish	753.51
Matt chrome finish	753.50

Suitable for concealed cistern K750
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00,
211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under
end number 99 possible at an extra charge. Please send file as vector graphic,
eps or similar.



Flush button T760



Design	Ref. no.
White	760.00
Polished chrome finish	760.51
Matt chrome finish	760.50

Suitable for concealed cistern K750/K760
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:


WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00,
211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under
end number 99 possible at an extra charge. Please send file as vector graphic,
eps or similar.



Flush buttons Burda

Flush button T770



Design	Ref. no.
--------	----------

White	770.00
Polished chrome finish	770.51
Matt chrome finish	770.50

**Suitable for concealed cistern K750/K760
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00,
211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T780



Design	Ref. no.
--------	----------

Polished chrome finish	780.51
Matt chrome finish	780.50

**Suitable for concealed cistern K750/K760
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: zinc die casting

Suitable for the following elements:

WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23
WC33-30-21, 211042.00, 211133.00, 211134.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T784



Design	Ref. no.
--------	----------

White/Polished chrome finish/White	784.83
Black/Polished chrome finish/Black	784.84

Design	Ref. no.
--------	----------

Matt chrome finish / Polished/ Matt chrome finish	784.68
Polished chrome finish/Matt/ Polished chrome finish	784.65

**Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00,
211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00,
211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T785



Design Ref. no.

Stainless steel 785.60

Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: Stainless steel

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T787



Design Ref. no.

White/Polished chrome finish/White 787.83

Black/Polished chrome finish/Black 787.84

Design Ref. no.

Matt chrome finish / Polished / 787.68
Matt chrome finish

Polished chrome finish/Matt / 787.65
Polished chrome finish

Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T788



Design Ref. no.

White/Polished chrome finish/White 788.83

Black/Polished chrome finish/Black 788.84

Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush buttons Burda

Flush button T790



Design	Ref. no.	Design	Ref. no.
White	790.00	Matt chrome finish	790.50
Black	790.20	Polished chrome finish	790.51

**Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T791



Design	Ref. no.	Design	Ref. no.
White/Polished chrome finish/White	791.83	Matt chrome finish / Polished/ Matt chrome finish	791.68
Black/Polished chrome finish/Black	791.84	Polished chrome finish/Matt/ Polished chrome finish	791.65

**Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T795



Design	Ref. no.	Design	Ref. no.
White	795.00	Matt chrome finish	795.50
Black	795.20	Polished chrome finish	795.51

**Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T798



Design	Ref. no.	Design	Ref. no.
White	798.00	Matt chrome finish	798.50
Black	798.20	Polished chrome finish	798.51

Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar..



Flush button T901 / T902



Design	Ref. no.
White (2- quantity T901)	901.00
White (1- quantity T902)	902.00

Suitable for concealed cistern K770/K845
2-quantity flush, for actuation from the front (T901)
1-quantity flush, flush/stop, (T902)
Successor models of T900

- With mounting frame
- With fastening material
- Material: plastic


Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush button T921



Design	Ref. no.
White	921.00
Matt chrome finish	921.50
Polished chrome finish	921.51

Suitable for concealed cistern K921
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211456, 523556, 611234, WC3-32-21

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



Flush buttons Geberit

Flush button Sigma01 Round



Design	Ref. no.
White	551030.00
Matt chrome finish	551030.50
Polished chrome finish	551030.51
and many more	

Suitable for concealed cistern Sigma 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



Flush button Sigma10 Round



Design	Ref. no.	Design	Ref. no.
Plate and button white Design rings polished chrome finish	550037.83	Stainless steel brushed and many more	550037.60
Plate and button black Design rings polished chrome finish	550037.84		

Suitable for concealed cistern Sigma 1-quantity flush, flush/stop, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



Flush button Sigma20 Round



Design	Ref. no.
Plate and button white Design rings polished chrome finish	550028.83
Plate and button black Design rings polished chrome finish	550028.84
Stainless steel brushed and many more	550028.60

Suitable for concealed cistern Sigma 1-quantity flush, flush/stop, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



Flush button Sigma20 Square



Design Ref. no.

Plate and button white 550065.83

Design strips polished chrome finish

Plate and button black 550065.84

Design strips polished chrome finish

and many more



Flush button Sigma50 Square



Design Ref. no.

Base plate and buttons 550027.00
chrome-plated, cover plate white

Base plate and buttons 550027.70
chrome-plated, cover plate black



Flush button Sigma70 Square



Design Ref. no.

Brushed stainless steel 550059.60

Glass white 550059.69

Glass black 550059.72

**Suitable for concealed cistern Sigma
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



**Suitable for concealed cistern Sigma
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



Flush buttons Geberit

Slide-in unit for Geberit DuoFresh Stick,
for Sigma concealed cistern 12 cm



Design

Ref. no.

Polished chrome finish

550035

For Geberit Sigma concealed cisterns 12 cm
(from year of manufacture 2008)
For inserting Geberit DuoFresh Stick without chlorine
or oxidising components

- for Geberit flush button Sigma01 Round
- for Geberit flush button Sigma10 Round
- for Geberit flush button Sigma20 Round
- for Geberit flush button Sigma20 Square
- for Geberit flush button Sigma50 Square

Features

Actuation from the front
Geberit DuoFresh Stick can be inserted without tools



Flush button Delta10 Round, screwable



Design

Ref. no.

Stainless steel

550024.60


Suitable for concealed cistern Delta
1-quantity flush, flush/stop, for actuation from the front

- With mounting frame
- With fastening material
- Material: Stainless steel

Suitable for the following elements:
211109, 211222, 511010, 611115, 611157, 611371, 611485,
WC3-01-21



Flush button Delta15 Round



Design

Ref. no.

White

550026.00

Matt chrome finish

550026.50


Passend zu UP-Spülkasten Delta
1-Mengen Spülung Spül / Stop, für Betätigung von vorne

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Kunststoff

Passend für folgende Elemente:
211109, 211222, 511010, 611115, 611157, 611371, 611485,
WC3-01-21



Flush button Delta25 Round



Suitable for concealed cistern Delta 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:


211109, 211222, 511010, 611115, 611157, 611371, 611485, WC3-01-21

Design Ref. no.

White	550042.00
Matt chrome finish	550042.50



Flush button Delta25 Square



Suitable for concealed cistern Delta 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211109, 211222, 511010, 611115, 611157, 611371, 611485, WC3-01-21

Design Ref. no.

White	550047.00
Matt chrome finish	550047.50



Flush button Delta50 Square



Suitable for concealed cistern Delta 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:

211109, 211222, 511010, 611115, 611157, 611371, 611485, WC3-01-21

Design Ref. no.

White	550066.00
Matt chrome finish	550066.50



Flush buttons Geberit / Schell

Flush button Omega20 Round



Ausführung	Art.-Nr.	Ausführung	Art.-Nr.
hochglanz verchromt, Designringe matt verchromt	550060.65	weiß, Designringe vergoldet	550060.66
weiß, Designringe hgl. verchromt	550060.83	schwarz, Designringe hgl. verchromt	550060.84

**Passend zu UP-Spülkästen Omega
2-Mengen Spülung, für Betätigung von vorne und oben**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Kunststoff

Passend für folgende Elemente:

211140.00/211390.00/211395.00/611190.00/611290.00
WC3-26-21



Flush button Omega20 Square



Ausführung	Art.-Nr.	Ausführung	Art.-Nr.
hochglanz verchromt, Designstreifen matt verchromt	550061.65	weiß, Designstreifen vergoldet	550061.66
weiß, Designstreifen hgl. verchromt	550061.83	schwarz, Designstreifen hgl. verchromt	550061.84

**Passend zu UP-Spülkästen Omega
2-Mengen Spülung, für Betätigung von vorne und oben**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Kunststoff

Passend für folgende Elemente:

211140.00/211390.00/211395.00/611190.00/611290.00
WC3-26-21



Betätigungsplatte Omega60 Square



Ausführung	Art.-Nr.	Ausführung	Art.-Nr.
verchromt gebürstet, Designstreifen und Rahmen hgl. verchromt	550062.87	Omega60 Abdeckrahmen verchromt gebürstet	550064.87
Taste: Glas weiß, Designstreifen: verspiegelt, Rahmen: hgl. verchromt	550062.69		

**Passend zu UP-Spülkästen Omega
2-Mengen Spülung, für Betätigung von vorne**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Zinkdruckguss

Passend für folgende Elemente:

211140.00/211390.00/211395.00/611190.00/611290.00
WC3-26-21



Geberit cover plate Omega



Design Ref. no.

Glass white 550063.69

**Suitable for concealed cistern Omega
2-quantity flush**

- With mounting frame
- With fastening material
- Material: zinc die casting

Suitable for the following elements:

211140.00/211390.00/211395.00/611190.00/611290.00
WC3-26-21



Flush button Schell Edition



Design Ref. no.

Plastic, alpine white 550070.00

Stainless steel 550070.60

**Suitable for WC flush valve Compact
Flush plate with push button
1-quantity flush, flush/stop**

- With mounting frame,
- With self-closing plastic cartridge
- With automatic nozzle cleaning needle



03 – 18 Santro Pre-planked prewall system



19 – 50 BS+ Dry construction system



51 – 54 Burda-Block combined wet and dry construction system



55 - 58 my move elements Electrically height-adjustable



59 – 64 Kombiset Wet construction system



65 – 78 Flush buttons



79 – 94 Flushing systems WC Burda page 80 urinal Burda page 86-87
WC Geberit page 80-85 urinal Geberit page 88-94



Flushing systems wc

Burda WC control unit suitable for Burda cistern K770
manual / for folding support rails with radio transmission

for mains operation



Design Ref. no.

Burda WC control unit,
screwable for Burda
concealed cistern K770

Button: white T690.00

Button: stainless steel T690.60

Flush control for retrofitting or new installation in public or private areas. Suitable for Burda K770 cisterns. Triggered either manually using an actuation button with dual flush or wirelessly via radio transmission using a folding support handle.

Suitable for the following elements:

211065, 211066, 211140, 211149, 211240, 211303, 211330, 211700, 211943, 220140, WC3-50-21, WC5-50-26, WC5-50-27, WC33-50-21

- Radio activation via folding support handles
- Hygienic flush adjustable (1-148 hours factory setting, 24 hours can be changed via app for Android)
- Flush duration (factory setting 7 sec. can be changed via app for Android)
- Test flush (can be triggered via app for Android)
- Triggering via manual flush plate 2 quantity possible

Note:

The sink settings app for Android is available at:
service@burda-online.com



Geberit WC control unit Sigma10 Round, screwable
automatic / touchless / manual

for mains operation



Design Ref. no.

Geberit WC control,
Sigma10 Round, screwable
for Geberit Sigma

Plate and button: brushed 505436
Design ring: polished

Geberit shell set for
WC control with electrical
flush release 505441

Vandal-proof flush control for retrofitting or new installation for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Activation is automatic / contactless / manual via an infrared sensor as well as by hand as a 1-quantity or 2-quantity flush.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Note:

The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.



Geberit WC control unit Sigma10 Round, screwable
automatic / contactless

for mains operation



Design Ref. no.

Burda WC control unit
Sigma10 Round, screwable
for Geberit Sigma

Plate: brushed 505434
Design ring: polished

Geberit shell for
WC control with electrical
flush release 505441

Vandal-proof flush control for retrofitting or new installation
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless / manual via an infrared
sensor as well as manually as a 1-quantity or or 2-quantity flush.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27


Note:

The distance between the mains transformer and the WC
control unit including the extension cable, must not exceed 4 metres;
Larger distances only after consultation with Geberit.



Geberit WC control unit Sigma10 Round
automatic / contactless

for mains operation

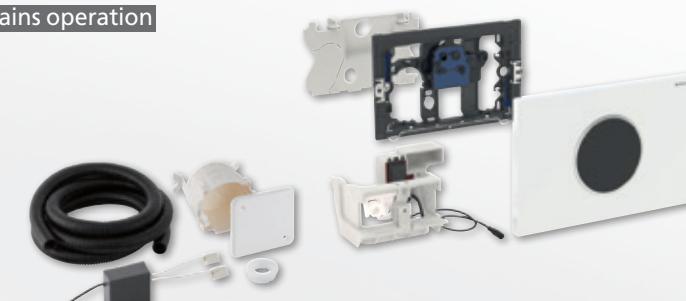

Design Ref. no.

Geberit WC control unit, Sigma10
Round for Geberit Sigma

Plate: brushed 505431.00
Design ring: polished

Plate: polished chrome finish 505431.65
Design ring: matt chrome finish

Plate: white 505431.66
Design ring: gold-plated

Plate: black 505431.84
Design ring: polished chrome finish

Vandal-proof flush control for retrofitting or new installation
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless via an infrared sensor
as well as by approaching with the hand as a 1-quantity or
2-quantity flush.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Note:

The distance between the mains transformer and the WC
control unit including the extension cable, must not exceed 4 metres;
Larger distances only after consultation with Geberit.



Flushing systems wc

Geberit WC control unit Sigma10 Round, screwable
manual / for folding support rails

for mains operation



Design	Ref. no.	Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable for Geberit Sigma			
Plate and button: brushed Design ring: polished	505430	Geberit shell set for WC control with mechanical flush release	505541
Geberit shell set for WC control with electrical flush release	505441		

Vandal-proof flush control for retrofitting or new installation
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

The flush is triggered manually as a 1-quantity flush or via a
wired support handle

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Note:

The distance between the mains transformer and the WC
control unit including the extension cable, must not exceed 4 metres;
Larger distances only after consultation with Geberit.



Geberit WC control unit Sigma10 Round
Manual / for folding support rails with radio transmission

for mains operation



Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable Radio release for Geberit Sigma	
Plate and button: brushed Design ring: polished	505428
Geberit shell set for WC control with electrical flush release	505441

Vandal-proof flush control for retrofitting or new installation
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

The flush is triggered manually as a 1-quantity flush or wirelessly
via a folding support handle.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Note:

The distance between the mains transformer and the WC
control unit including the extension cable, must not exceed 4 metres;
Larger distances only after consultation with Geberit.

Der Abstand vom Sender darf innerhalb eines Raums 10 m nicht
überschreiten. Kann mit Geberit-Taster für Spülauflösung (Funk)
Art.-Nr. 505 425 kombiniert werden.



Geberit WC control unit Sigma80 Square, lockable
contactless



Design Ref. no.

Geberit WC control,
Sigma80 Square, lockable
for Geberit Sigma

Black glass 505429

Geberit shell set for
WC control with
mechanical flush release 505441

Connection cable to Geberit
Flush button Sigma80 505542



Geberit WC control unit Sigma10 Round, screwable
automatic / contactless / manual

for battery operation



Design Ref. no.

Geberit WC control,
Sigma10 Round, screwable
for Geberit Sigma

Plate and button: brushed 505433
Design ring: polished

Vandal-proof flush control for retrofitting or new installation
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

The flush is triggered as a 1-quantity flush without contact or via
an external button.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Note:

The distance between the mains transformer and the WC
control unit including the extension cable, must not exceed 4 metres;
Larger distances only after consultation with Geberit.



Vandal-proof flush control for retrofitting or new installation
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless via an infrared sensor as
well as manually as a 1-quantity or 2-quantity flush.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



Flushing systems wc

Geberit WC control unit Sigma10 Round, screwable automatic / contactless

for battery operation



Design

Ref. no.

Geberit WC control,
Sigma10 Round, screwable
for Geberit Sigma

Plate: brushed 505432
Design ring: polished



Geberit WC control unit Sigma10 Round
automatic / contactless

for battery operation



Design

Ref. no.

Geberit WC control,
Sigma10 Round
for Geberit Sigma

Plate: brushed 505427.00
Design ring: polished

Plate: polished chrome finish 505427.65
Design ring: matt chrome finish

Plate: white 505427.66
Design ring: gold-plated



Vandal-proof flush control for retrofitting or new installation for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless, via an infrared sensor or by approaching the flush with the hand as a 1-quantity or 2-quantity flush.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Vandal-proof flush control for retrofitting or new installation for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless, via an infrared sensor or by approaching the flush with the hand as a 1-quantity or 2-quantity flush.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Geberit WC control unit Sigma10 Round
Manual / for folding support rails with radio transmission
for battery operation



Design Ref. no.

Geberit WC control,
Sigma10 Round, screwable
Radio triggering
for Geberit Sigma

Plate and button: brushed 505426
Design ring: polished



Geberit radio button
for electronic flush actuation

for battery operation



Design Ref. no.

Battery operation 505425

Vandal-proof flush control for retrofitting or new installation
for public and private areas.
Suitable for Geberit Sigma concealed cisterns.
The flush is triggered manually as a single flush or wirelessly by
radio transmission via a folding support handle.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

Note:

The distance from the transmitter must not exceed 10 m within a room. Can be combined with Geberit push-button for flush actuation (radio) item no. 505 425.




For manual, wireless flush actuation for Geberit Sigma
concealed cistern via electronic Geberit WC control unit.



Flushing systems urinal

Burda Flowtronik

for mains operation

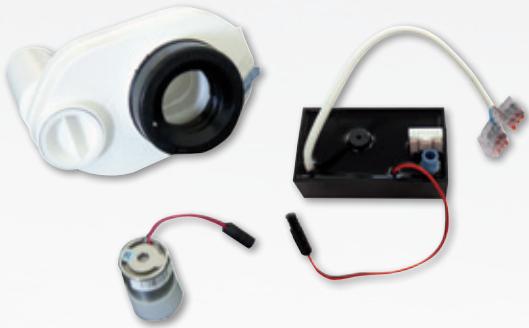

Design

Ref. no.

214854

Concealed urinal flush control with trap sensor, programmable via Android App 230 V, ready-to-install set

consisting of:

- Electronics box
- Solenoid valve
- Trap sensor



BurdaTronic U-06 Manual operation



Design

Ref. no.

White	505450.00
Polished chrome finish	505450.50
Stainless steel	505450.60

- With front panel and lever handle
- With cartridge
- With mounting frame
- With flush cartridge

Suitable for the following elements:
214029, 214030, 542054, 542055, 641694, UR3-36-59 M



BurdaTronic U-09

for mains operation



Design

Ref. no.

BurdaTronic U-09
Opto-electronics

230 V, stainless steel

505455.60

BurdaTronic U-09, Opto-electronics

- Flush button incl. mounting frame and sensor
- Travo 230 V
- Solenoid valve incl. adapter
- Remote control


Suitable for the following elements:
214889 und 214989



Flushing systems urinal

Geberit urinal flush control, cover plate type 01 Round

for mains operation

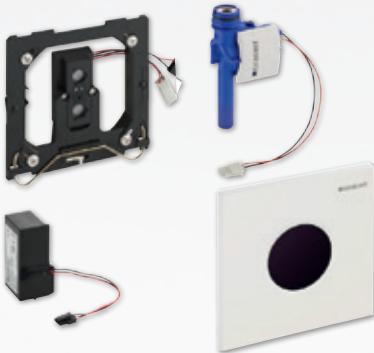

- With front panel
- With mounting frame
- Integrated electronics, 230 V

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design Ref. no.

White alpine,
zinc die casting 505457.00


Polished chrome finish,
zinc die casting 505457.51

Matt chrome finish,
zinc die casting 505457.50



Geberit urinal flush control, cover plate type 10 Round

for mains operation

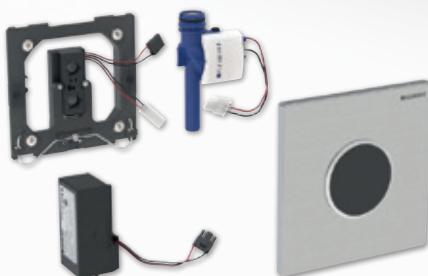

- With front panel
- With mounting frame
- Integrated electronics, 230 V

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design Ref. no.

Plate: brushed
Design ring: polished 505458.00

Plate: polished chrome finish
Design ring: matt chrome finish 505458.65

Plate: white
Design ring: polished chrome finish 505458.83

Plate: white
Design ring: gold-plated 505458.66

Design Ref. no.

Plate: white
Design ring: matt chrome finish 505458.85


Plate: black
Design ring: polished chrome finish 505458.84

Plate: matt chrome finish
Design ring: polished chrome finish 505458.68



Geberit urinal flush control, cover plate type 50 Square

for mains operation

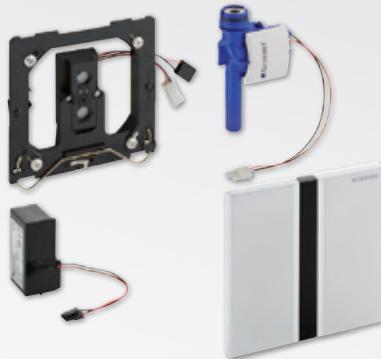

- With front panel
- With mounting frame
- Integrated electronics, 230 V

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design

Ref. no.


Brushed chrome,
Zinc die casting

505462.87



Geberit urinal flush control, cover plate type 50 Square

for battery operation

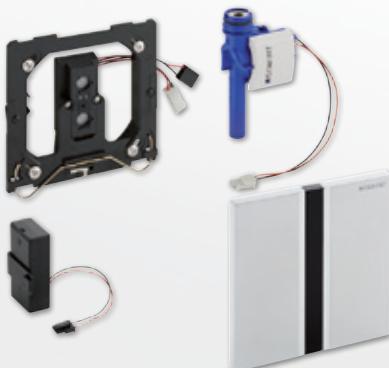

- With front panel
- With mounting frame
- Integrated electronics, battery operation

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design

Ref. no.

Brushed chrome,
Zinc die casting

505423.87



Flushing systems urinal

Geberit urinal flush control concealed

for mains operation



Design

Ref. no.

505435

- 230 V ready-to-install set

Suitable for the following elements:
on request


Accessories:

Geberit service mobile phone, page 92



Geberit urinal flush control Basic

for mains operation

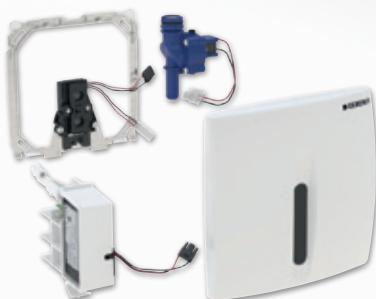

Design

Ref. no.

White alpine, plastic 505464.00

Matt chrome finish, plastic 505464.50

- With front panel
- With mounting frame
- Integrated electronics, 230 V

Suitable for the following elements:
647562, 214702, UR3-87-59, 523613


Accessories:

Geberit service mobile phone, page 92



Geberit urinal flush control, cover plate type 01 Round

for battery operation

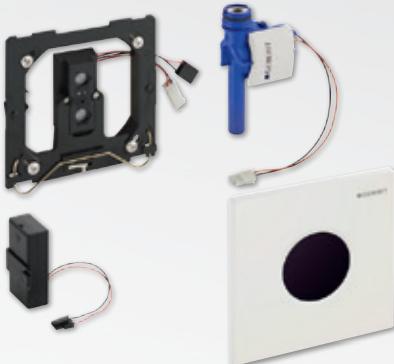

- With front panel
- With mounting frame
- Integrated electronics, battery operation

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design Ref. no.

White alpine,
Zinc die casting 505463.00


Polished chrome finish,
Zinc die casting 505463.51

Matt chrome finish,
Zinc die casting 505463.50



Geberit urinal flush control, cover plate type 10 Round

for battery operation

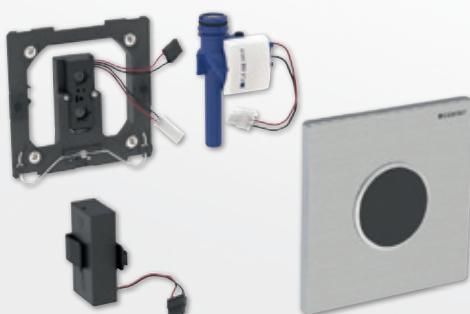

- With front panel
- With mounting frame
- Integrated electronics, battery operation

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59



Design Ref. no.

Plate: brushed
Design ring: polished 505466.00

Plate: polished chrome finish
Design ring: matt chrome finish 505466.65

Plate: white
Designring: hgl. verchromt 505466.83

Plate: white
Design ring: gold-plated 505466.66

Design Ref. no.

Plate: white
Design ring: matt chrome finish 505466.85

Plate: black
Design ring: polished chrome finish 505466.84


Plate: matt chrome finish
Design ring: polished chrome finish 505466.68



Flushing systems urinal

Geberit urinal flush control replacement set

for mains or battery operation

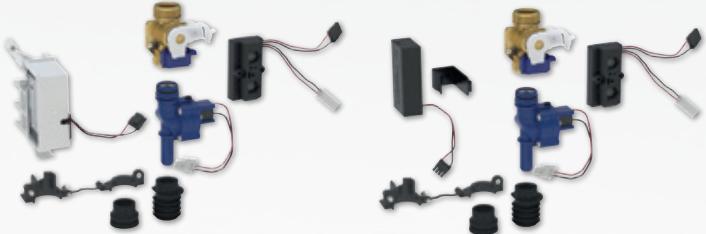

Design Ref. no.

for main operation 505475

for battery operation 505476

for converting existing Geberit urinal flush controls with mains or battery operation, cover plate 160 x 160 mm
Item no. 115.802.xx.x, 115.825.00.1, 115.837.00.1, 115.818.xx.x
for automatic flush actuation of urinals

Not suitable for converting urinals with a spray head



Batteriebetrieb



Netzbetrieb

Geberit service mobile phone



Design Ref. no.

service mobile phone 505477

Geberit service mobile phone

For entering and querying the settings of various electronic Geberit products such as washstand taps, WC and urinal flush controls and sanitary flushes.



Geberit urinal flush control, flush button type 01 Round

with pneumatic flush actuation



Design Ref. no.

White alpine, plastic	505469.00
Polished chrome finish, plastic	505469.51
Matt chrome finish, plastic	505469.50

- With front panel
- With mounting frame
- With pneumatic valve

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59



Geberit urinal flush control, flush button type 10 Round

with pneumatic flush actuation



Design Ref. no.

Brushed stainless steel / Polished/brushed	505470.00
Polished chrome finish / matt/ Polished chrome finish	505470.65
White / Polished chrome finish / White	505470.83
White / Gold-plated / White	505470.66

Design Ref. no.

White / Matt chrome finish / Matt chrome finish	505470.85
Black / Polished chrome finish / Black	505470.84
Matt chrome finish / Polished chrome finish / Matt chrome finish	505470.68

- With front panel
- With mounting frame
- With pneumatic valve

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59



Flushing systems urinal

Geberit urinal flush control, flush button type 50 Square

with pneumatic flush actuation

Spezialanfertigung



- With front panel
- With mounting frame
- With pneumatic valve

Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design	Ref. no.	Design	Ref. no.
White alpine, Zinc die casting, Plastic	505471.00	Glass lava, Zinc die casting, Glass	505471.04
Chrome brushed, Zinc die casting, Chromed brass	505471.01	Glass sand grey, Zinc die casting, Glass	505471.05
Deep black RAL 9005, Zinc die casting, Plastic	505471.02		
Smoked glass mirrored, Zinc die casting, Glass	505471.03		



Geberit urinal flush control, flush button type 50 Round

with pneumatic flush actuation




- With front panel
- With mounting frame
- With pneumatic valve

Suitable for the following elements:

647562, 214702, 523613, UR3-87-59

Design	Ref. no.
White alpine, Plastic	505474.00
Matt chrome finish, Plastic	505474.50



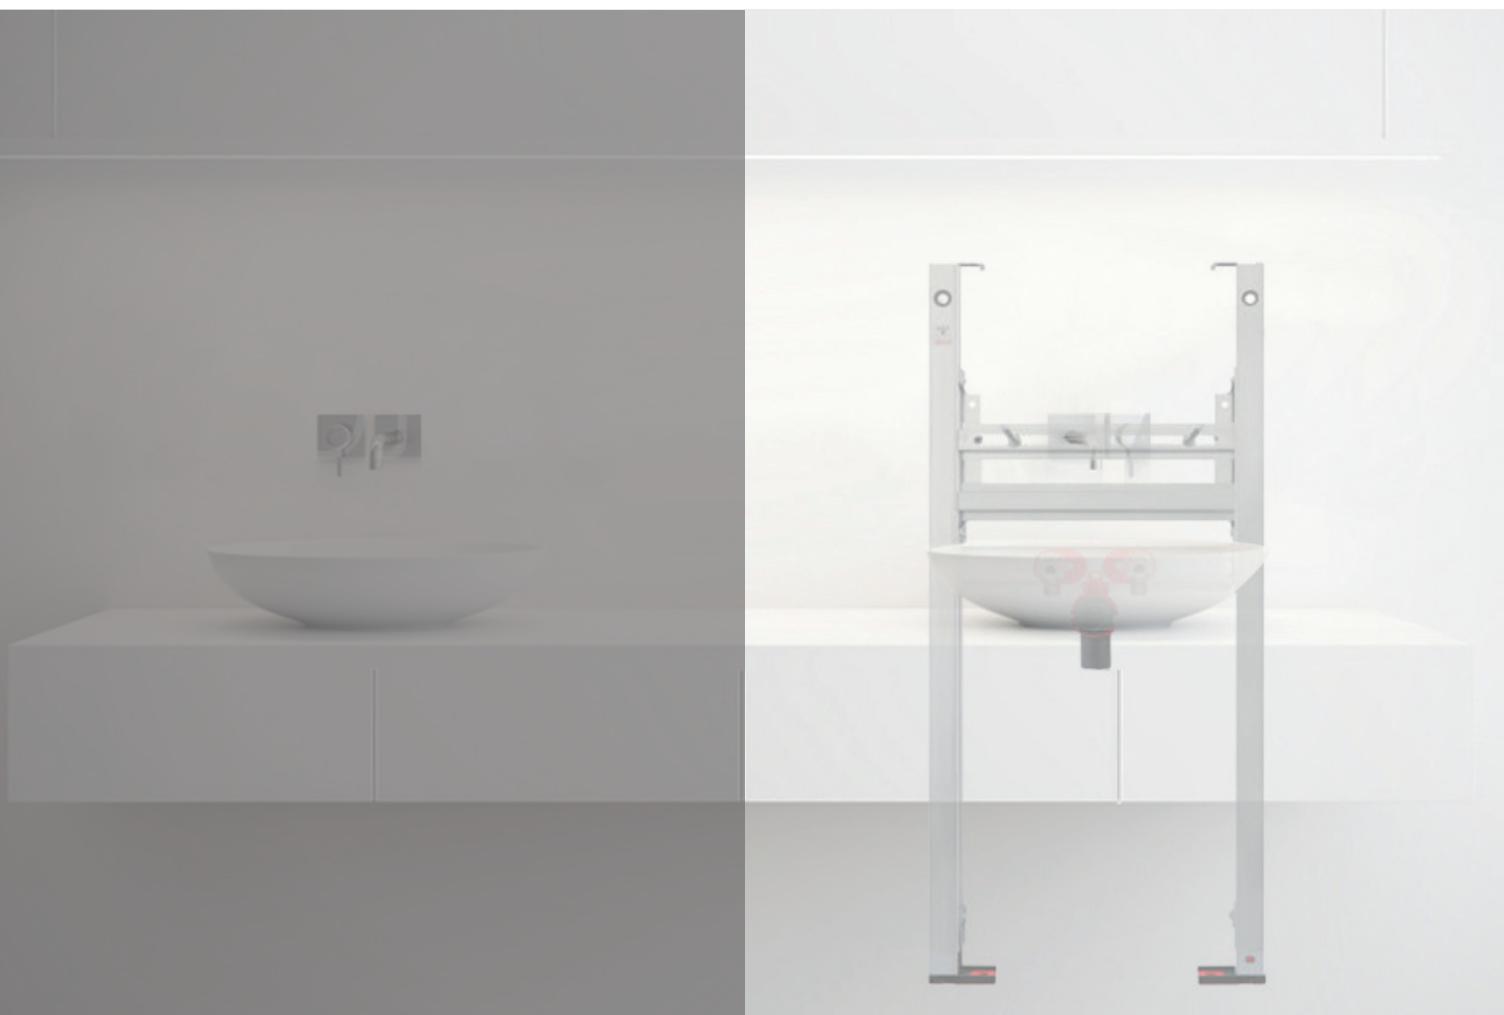

burda
Sanitärtechnik

Herbert Burda GmbH
Krefelder Straße 87
40549 Düsseldorf

tel. +49 211 95001-0
fax. +49 211 500575

www.burda-online.com