


BS+ WC element for wall-hung WC, 112 cm with concealed cistern Geberit Delta for operation from the front, for dual flush, with wall bracket for pre-wall mounting

Sound-insulated with optional premium wall brackets for pre-wall mounting

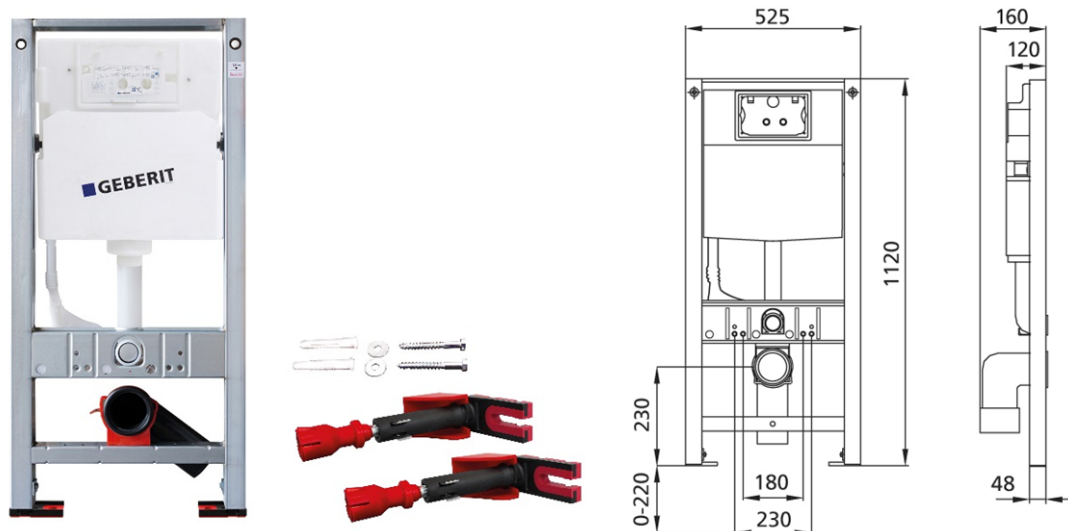

Intended use

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For wall-hung toilets with connection dimensions in accordance with DIN EN 33:2011-11
- Suitable for wall-hung WCs with projection > 62 cm
- For 1-quantity, 2-quantity or flush-stop flushing
- For floor constructions 0-22 cm

Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Frame prepared to accommodate WC power bearings for WC ceramics with a small support area
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Connecting elbow can be mounted in various depth positions without tools
- Fastening connection elbow soundproofed
- Concealed cistern with front operation, condensation water insulated
- Immediate flushing possible with factory setting
- Water connection at the back or top center
- Suitable for Duravit Sensowash
- Equipped with empty pipe for water supply line for connection of Geberit AquaClean devices
- Suitable for all flush buttons of the Delta series 11/15/21/40/50

Scope of delivery

- Angle valve R 1/2, MeplaFix-compatible, with adapter ring
- Building protection for service opening, made of polystyrene foam
- Wall bracket for pre-wall mounting
- 2 Protective plugs
- Connection set for WC, DN 90 mm
- Connecting elbow made of PE-HD, DN 90 mm
- Transition sleeve made of PE-HD, DN 90/110 mm
- 2 threaded rods M12
- Fastening material

Make: Burda

Type: BS+

Item no.: 211109.99