


**BS+** Double WC element for wall-hung WC, 112 cm with concealed cistern  
Geberit Delta for operation from the front, for dual flush

**Sound-insulated with optional premium wall brackets for pre-wall mounting**

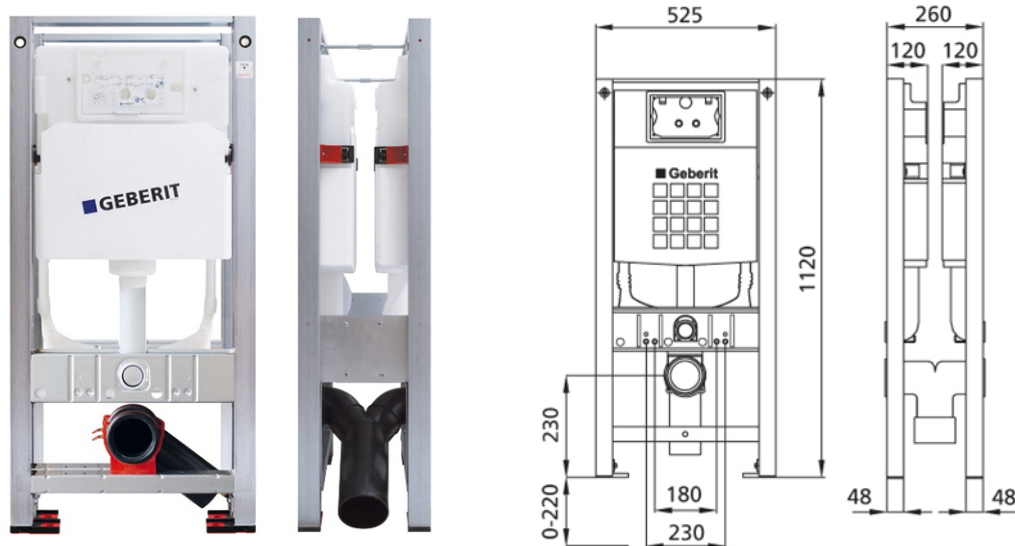

#### Intended use

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For wall-hung toilets with connection dimensions in accordance with DIN EN 33:2011-11
- Suitable for wall-hung WCs with projection > 62 cm
- For 1-quantity, 2-quantity or flush-stop flushing
- For floor constructions 0-22 cm

#### Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Frame prepared to accommodate WC power bearings for WC ceramics with a small support area
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Sound-insulated pivoting T-pipe attachment
- Sound-insulated connection bend fastening
- Concealed cistern with front operation, condensation water insulated
- Immediate flushing possible with factory setting
- Water connection at the back or top center
- Suitable for Duravit Sensowash
- Equipped with empty pipe for water supply line for connection of Geberit AquaClean devices
- Suitable for all flush buttons of the Delta series 11/15/21/40/50

#### Scope of delivery

- Angle valve R 1/2, MeplaFix-compatible, with adapter ring
- Building protection for service opening, made of polystyrene foam
- 4 Protective plugs
- 2 connection set for WC, DN 90 mm
- pivoting T-pipe swivel made of PE-HD, DN 90/110/90 mm
- 4 threaded rods M12
- Fastening material

Make: Burda

Type: BS+

Item no.: 211222.99