


BS+ element for urinal, 112-125 cm, universal with Burda shell set U-05/06

Sound-insulated with optional premium wall brackets for pre-wall mounting

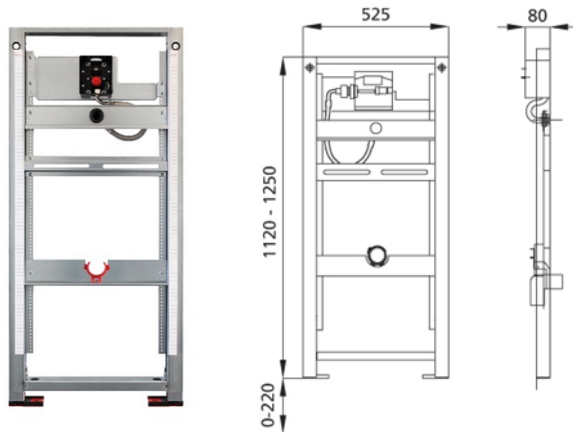

Intended use

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For mounting urinals
- For floor constructions 0-22 cm

Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Element height adjustable to urinal
- With Burda U-05/06 flush valve
- Suitable flush plates BurdaTronic U-06 (manual actuation)
- Water connection on the concealed housing
- Water connection
- Shut-off valve with throttle, pre-assembled
- Styrofoam construction protection for service opening
- Flexible flushing hose
- Height-adjustable attachment for DN 32 mm inlet
- Connection elbow can be fitted without tools
- Sound-insulated connection elbow fixing
- Urinal fastening M8, width and height adjustable
- Traverses height-adjustable

Scope of delivery

- Connection angle R 1/2
- Building protection with polystyrene block
- Connecting pipe between inlet DN 32 mm and urinal, with seal on urinal
- 1 protective plug
- connection elbow made of PE-HD, DN 63/50 mm
- protective cap
- seal DN 57/50 mm
- Urinal siphon DN 50 mm, with seal on urinal
- 2 threaded rods M8
- fixing material

Make: Burda
Type: BS+
Item no.: 214029