


BS+ element for urinal, 112-125 cm, universal
for AP pressure flushers/waterless/water-flushed urinals

Sound-insulated with optional premium wall brackets for pre-wall mounting

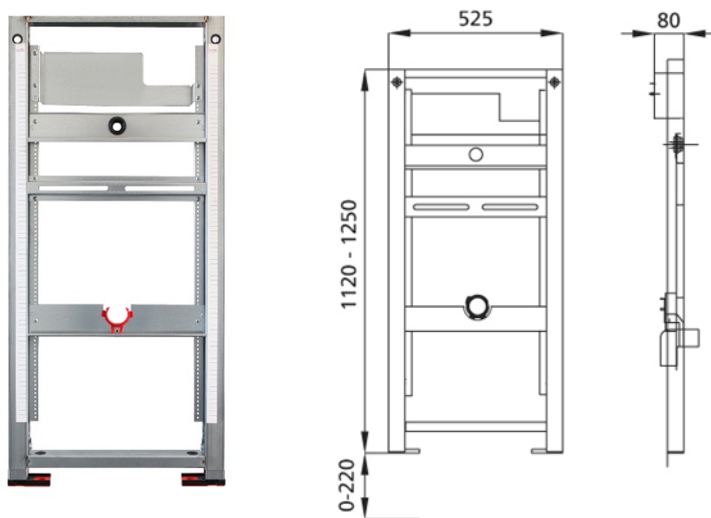

Intended use

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For mounting urinals
- For floor constructions 0-22 cm

Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Element height adjustable to urinal
- For AP pressure flushers, waterless and water-flushed urinals
- wall bushing
- water connection
- Fixing for inlet adjustable in height
- Connection bend can be mounted without tools
- Fastening for connection bend, sound-insulated
- Urinal fastening M8, width and height adjustable
- Crossbars height adjustable

Scope of delivery

- Wall washer R 1/2
- Connection angle R 1/2
- Connecting pipe between inlet DN 32 mm and urinal, with seal on urinal
- 1 protective plug
- Connecting elbow made of PE-HD, DN 63/50 mm
- protective cap
- seal DN 57/50 mm
- Urinal siphon DN 50 mm, with seal on urinal
- 2 threaded rods M8
- fixing material

Make: Burda
Type: BS+
Item no.: 214556