


BS+ element for urinal, 112-125 cm, universal
with Geberit-shell sett Basic manual release
or infrared urinal electronics

Sound-insulated with optional premium wall brackets for pre-wall mounting

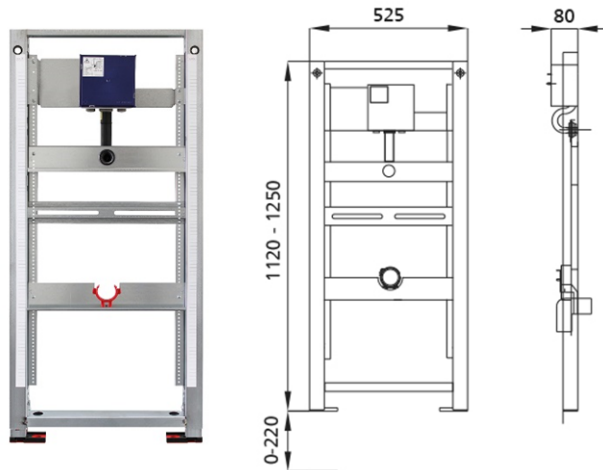

Intended use

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For mounting urinals
- For the installation of Geberit urinal flush controls from year of manufacture 2013
- For floor constructions 0-22 cm

Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Element height adjustable to urinal
- Universal flush-mounted housing for Geberit urinal flush controls
- Connection terminal for electrical connection in flush-mounted housing
- Water connection on the flush-mounted housing
- Water connection MeplaFix-compatible, can be installed without tools
- Shut-off valve with throttle, pre-assembled
- Construction protection for service opening 13.5x13.5 cm can be cut to length without tools
- Flexible flushing hose
- Height-adjustable attachment for DN 32 mm inlet
- Connection elbow can be fitted without tools
- Sound-insulated connection elbow fastening
- Urinal fastening M8, width and height adjustable
- Traverses height-adjustable

Scope of delivery

- Connection angle R 1/2
- Building protection with cover
- Connecting pipe between inlet DN 32 mm and urinal, with seal on urinal
- 1 protective plug
- Connection elbow made of PE-HD, DN 63/50 mm
- Protective cap
- Seal DN 57/50 mm
- Urinal siphon DN 50 mm, with seal on urinal
- 2 threaded rods M8
- Fixing material

Make: Burda
Type: BS+
Item no.: 214702