


BS+ fitting plate for water meter and flush-mounted shut-off valve

Completely soundproofed ex works



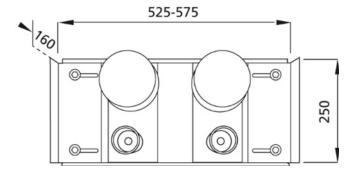

Intended use

- For drywall
- For installation in room-height installation walls
- For the installation of two measuring capsules with 2" KOAX thread

Features

- Sendzimir galvanised traverse

Scope of delivery

- Fastening material
- 2 Flush-mounted single-pipe connection piece for MTK / MTW-NG (2" EAS KOAX) incl. dummy cover and seal set
- 2 UP piston valve, free of dead space and low pressure loss (DIN DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1)
- 4 sound-insulated brackets
- 2 two-part polystyrene insulations building material class B1 (permissible operating overpressure PB: 10 bar, permissible operating temperature TB: 90°C, flow medium: drinking water)

Make: Burda Type: BS+ item no.: 215015