


**BS+** WC element for wall-hung WC, 112 cm with concealed cistern Geberit Sigma for operation from the front, for dual flush, barrier-free

**Sound-insulated with optional premium wall brackets for pre-wall mounting**

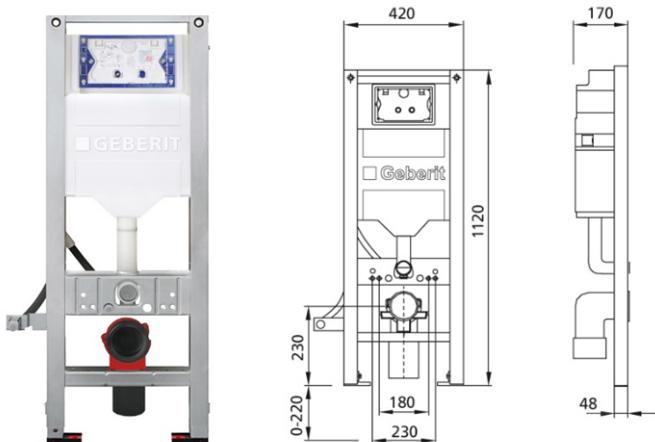

**Intended use**

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- Suitable for barrier-free construction
- For wall-hung toilets with connection dimensions in accordance with DIN EN 33:2011-11
- Suitable for wall-hung WCs with projection > 62 cm
- For 1-quantity, 2-quantity or flush-stop flushing
- For floor constructions 0-22 cm

**Features**

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Frame prepared to accommodate WC power bearings for WC ceramics with a small support area
- Frame width reduced for placement of support and grab rails next to the element
- WC installation height adjustable in the shell construction phase 41-46 cm
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Connecting elbow can be mounted in various depth positions without tools
- Fastening connection elbow soundproofed
- Concealed cistern with front operation, condensation water insulated
- Immediate flushing possible with factory setting
- Installation and service work on the concealed cistern without tools
- Water connection at the back or top center
- Building protection for service opening protects against moisture and dirt
- Protection for service opening can be cut to length
- Suitable for Duravit Sensowash
- Equipped with empty pipe for water supply line for connection of Geberit AquaClean devices
- Suitable for all flush buttons of the Sigma series (except Sigma40)
- Suitable for insertion of cleaning cubes

**Scope of delivery**

- Water connection R 1/2, with integrated angle valve and handwheel
- Building protection for service opening
- 2 Protective plugs
- Connection set for WC, DN 90 mm
- Connecting elbow made of PE-HD, DN 90 mm
- Transition sleeve made of PE-HD, DN 90/110 mm
- 2 threaded rods M12
- Fastening material

Make: Burda

Type: BS+

Item no.: 211148.01