


**WC element Reno-Kit** for free installation on the drain bend, 112 cm with concealed cistern Geberit Sigma for operation from the front, for dual flush W/H/D 495/1120/170 mm (with drain)

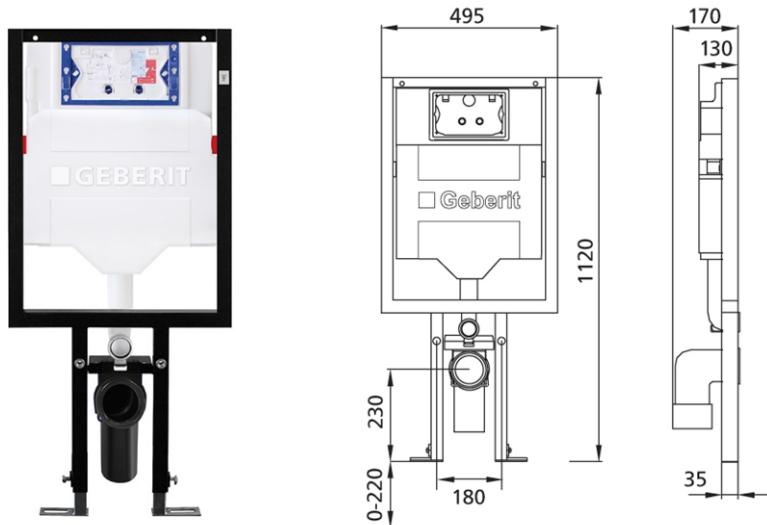

#### Intended use

- Replacement module in existing stud wall/pre-wall installations
- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For wall-mounted WCs with connection dimensions according to DIN EN 33:2011-11
- Suitable for wall-mounted WCs with projection up to 62 cm
- For 1-flush, 2-flush or flush-stop flushing
- For floor constructions 0-22 cm

#### Features

- Self-supporting powder-coated frame
- Footrests galvanized, adjustable 0-22 cm
- feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Connecting elbow can be mounted in various depth positions without tools
- Fastening connection elbow soundproofed
- Concealed cistern with front operation, condensation water insulated
- Immediate flushing possible with factory setting
- Installation and service work on the concealed cistern without tools
- Water connection at the back or top center
- Building protection for service opening protects against moisture and dirt
- Protection for service opening can be cut to length
- Suitable for Duravit Sensowash
- Equipped with empty pipe for water supply line for connection of Geberit AquaClean devices
- Suitable for all flush buttons of the Sigma series (except Sigma40)
- Suitable for insertion of cleaning cubes

#### Scope of delivery

- Water connection R 1/2, with integrated angle valve and handwheel
- Building protection for service opening
- 2 Protective plugs
- Connection set for WC, DN 90 mm
- Connecting elbow made of PE-HD, DN 90 mm
- Transition sleeve made of PE-HD, DN 90/110 mm
- 2 threaded rods M12
- Fastening material

Make: Burda

Type: BS+

Item no.: 211630.01