

03 – 18

**Santro** Pre-planked prewall system



19 – 50

**BS+**

WC page 24-30  
WT page 31-37  
Sink page 38

Bidet  
Urinal  
Shower/Bathtub

page 38  
page 39-41  
page 41-42

Built-in furniture  
Fastening element  
Element for fittings

page 43  
page 44  
page 44

Traverses page 45-47  
Accessories page 48-50



51 – 54

**Burda-Block** combined wet and dry construction system



55 – 58

**my move elements** Electrically height-adjustable



59 – 64

**Kombiset** Wet construction system



65 – 78

**Flush buttons**



79 – 94

**Flushing systems**



## Description of system

### 1.1 BS+

The BS+ installation range is the universally applicable, industrially pre-assembled element system for stud wall and front wall installation.

#### 1.1.1 Elements


This extensive range includes elements for toilets but also for urinals, bidets and wash-stands, as well as the corresponding elements for barrier-free construction. Ready-made elements are even available for special applications such as countertop washbasins with wall fittings, water metres or urinal electronics.

#### 1.1.2 Free choice of connections


With all units the fitter is free to choose between cisterns from various brand manufacturers and decide for himself what type of pre-fitted connection should be supplied with the element.

### 1.2 Application area


The BS+ is the flexible dry construction installation system for front wall installation or for fitting into a stud wall.

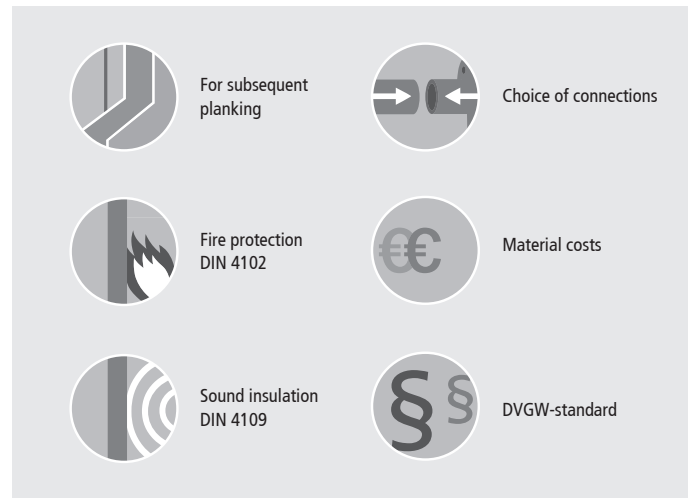


The application areas for this system are therefore building sites where drywallers are also expected to be included in handling the job.

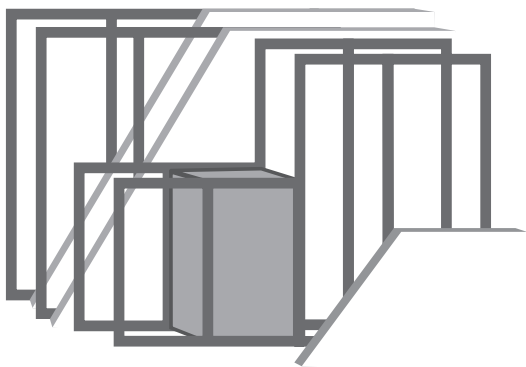

In front of stud wall

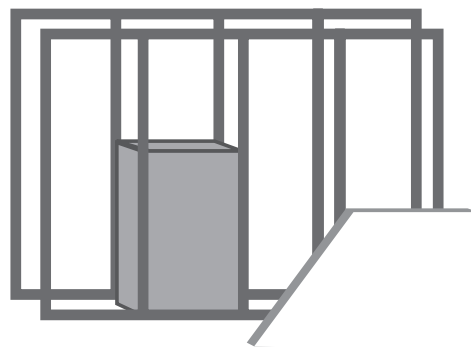


In stud wall

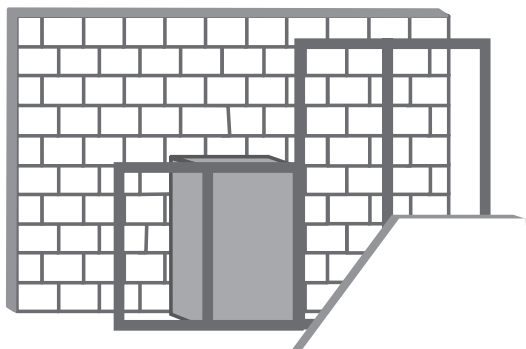

In front of solid wall

### 1.3 Benefits

The BS+ installation range offers fitters and planners the opportunity to create complete installations in classic dry constructions and to resort to pre-assembled units. Individual solutions can be flexibly planned in this way.

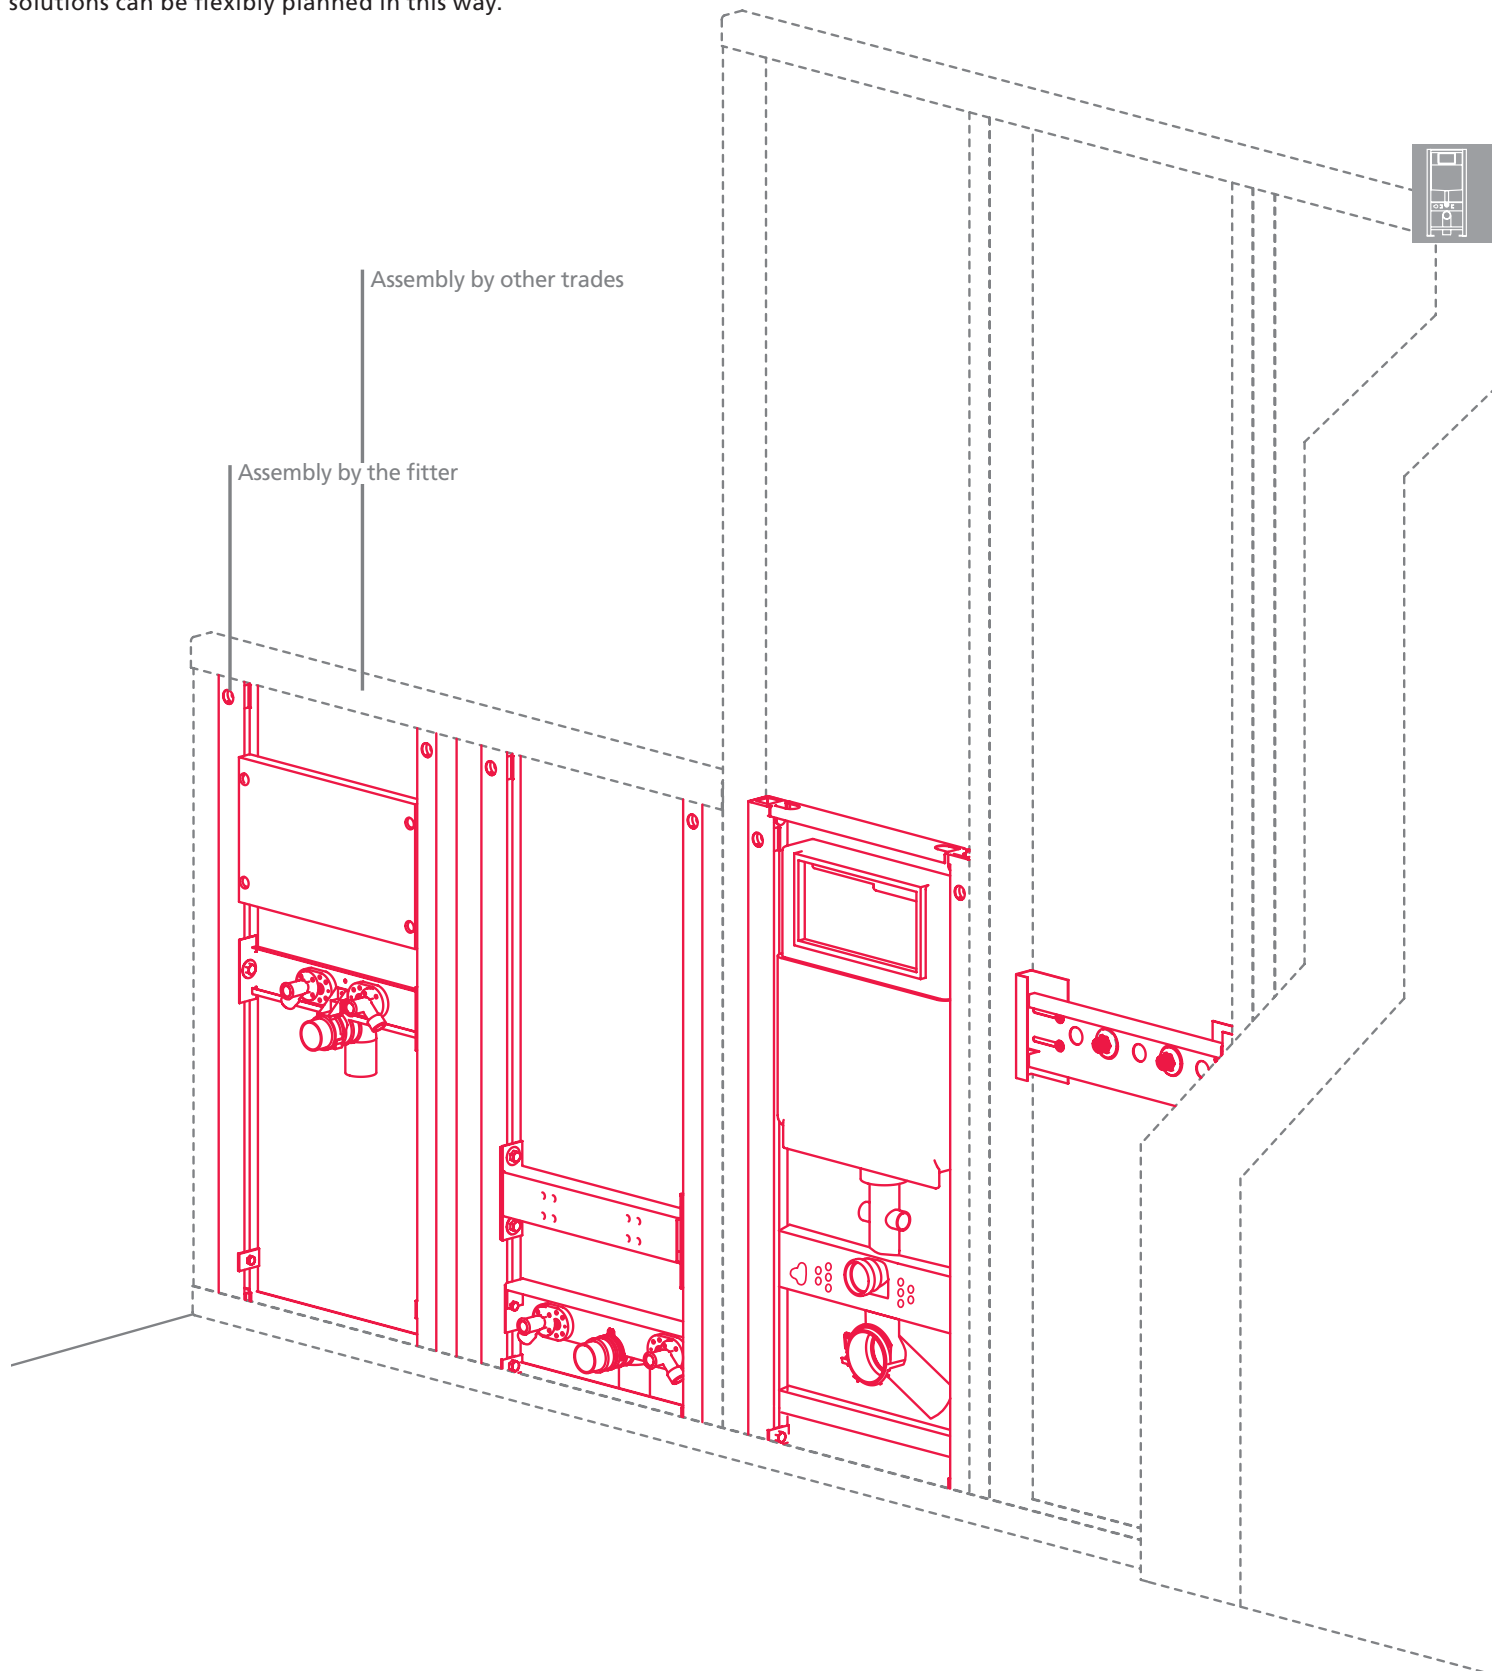

## Assembly instructions for fitting in stud walls

### 1.1 Perfect and installation-friendly

For new builds, renovations, loft conversions and the commercial sector: Light construction wall with integrated fastening and connection options for sanitary units are in line with modern building technology.

The BS+ system from Burda gives you a fully galvanised, self-supporting design for fitting sanitary units into light construction walls. This is an installation-friendly system for fitting individually into the C-profiles of a stud wall.


### 1.2 Design of the light constructions walls

The BS+ elements from Burda are designed to be fitted in stud walls according to DIN 18183, November 1988 edition, walls made out of plasterboard panels (design of metal stud walls) or wooden stud walls, with a load bearing capacity in accordance with DIN 18183. In so-called wet rooms with metal stud wall and BS+ Plus sanitary units planking should be done with double-layer, impregnated firecheck plasterboard panels.



When fitting WC installations suitable for old and disabled people, reinforced UA profiles must always be used!


Installation example:




metre mark to the standing C-profiles.



Inserting the element into the stud wall.




Metre mark on the stud wall align with the marking on the panel. (B)





Height adjustment of the element is done by adjusting the feet of the element. (A)

- Loosen nut
- Move foot to required size
- Tighten nut




Align the outer edges of the element flush with the outer edges of the stud wall and fix the position. (C)



Screw the aligned stud wall panel combination to the side and to the floor.

**Note:** The panelling must always be fully seated and screwed down without any gaps.

## Installation instructions for installation in a pre-wall installation

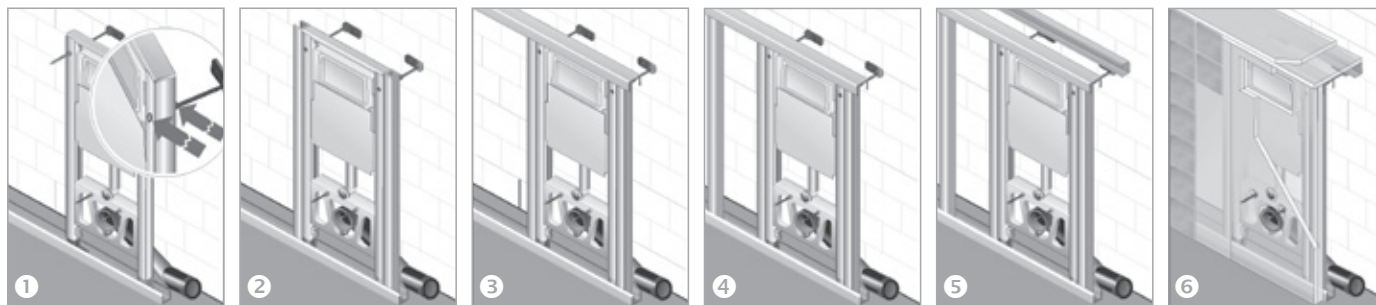

① Fasten the U-profile to the floor at the required distance to the wall and place the BS+ element into it. Install the two wall brackets supplied as accessories to the BS+ element and adjust the gap between the element and the wall with the aid of the wall brackets. Make the wall brackets face downwards or to the side. Cut the threaded rods off so that they no longer protrude from the element. Tighten the lock nuts.

② On the left and right of the element, use the self-tapping screws to fasten a C-profile on each side, which are additionally joined to the U-profile with pop rivets at the bottom.

**Note:** As a matter of principle, all C and U-profiles are joined with pop rivets or profile connecting pliers.

③ Put another U-profile over the element in the required length, which will act as a shelving area.




④ Fan out the levels in which the panels are located. Every 625 mm, a C-profile must be fanned out or a new panel placed.

⑤ Now attach another U-profile (back to the wall) at the same height as the top edge of the element.


⑥ Plank this construction with plasterboard suitable for damp rooms. The panelling must always be double with no gaps! Additional screws must be used in the WC area!

## Can be installed in a stud wall or as a single element using wall brackets for pre-wall installation

- The elements consist of 48 mm wide profiles, so they can be perfectly installed in a 50 plasterboard stud wall.
- GKFI building boards can be installed be placed butt to butt
- Fastening the building boards without pre-drilling
- Sound decoupling integrated as standard (all red plastic parts)
- Element feet as standard 220 mm extendable
- High corrosion protection due to sendzimir galvanised elements
- 4-point fastening
- All current standards are complied with (e.g. DIN 4109 etc.)

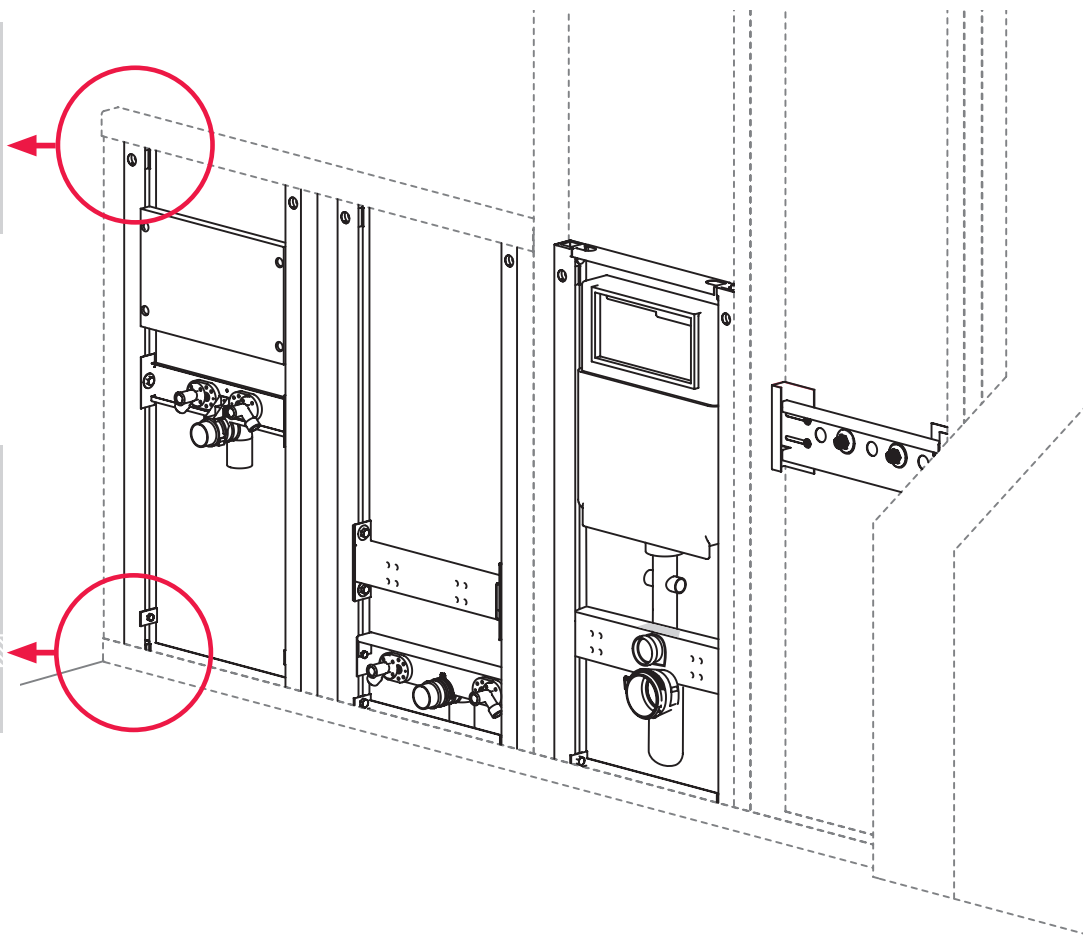

BS+ wall-hung WC element with concealed cistern Height 1120 mm

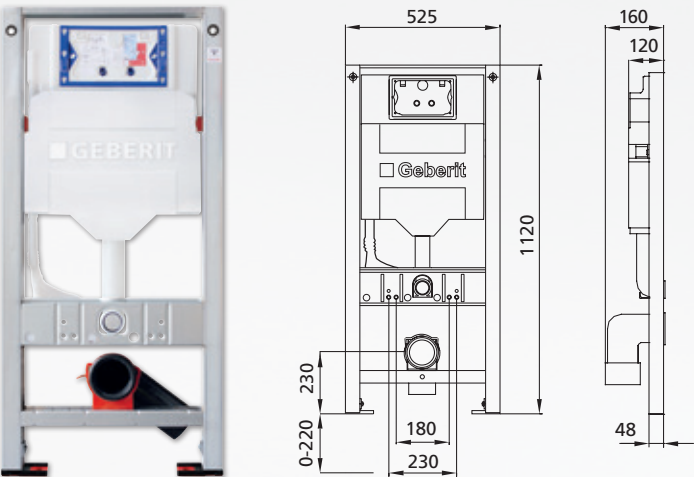

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99)  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 47  
Flush plates and flushing systems from page 59

**Note:**  
WC power brackets for WC ceramics with small contact surface  
less 17 cm (e.g. Flaminia, Sentique), page 48

| Design                                         | Ref. no.  | Design                                                                                                         | Ref. no.  |
|------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------|-----------|
| Installation height 1120 mm                    |           | Geberit cistern Delta<br>with 2-quantity flush<br>incl. sound-decoupled wall<br>brackets for pre-wall mounting | 211109.99 |
| Geberit cistern Sigma<br>with 2-quantity flush | 211088.01 | Burda K770<br>with 2-quantity flush                                                                            | 211140.00 |


**Can also be used as a barrier-free WC element.**

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



BS+ WWC element with Geberit Sigma concealed cistern  
or Burda concealed cistern K770 for children

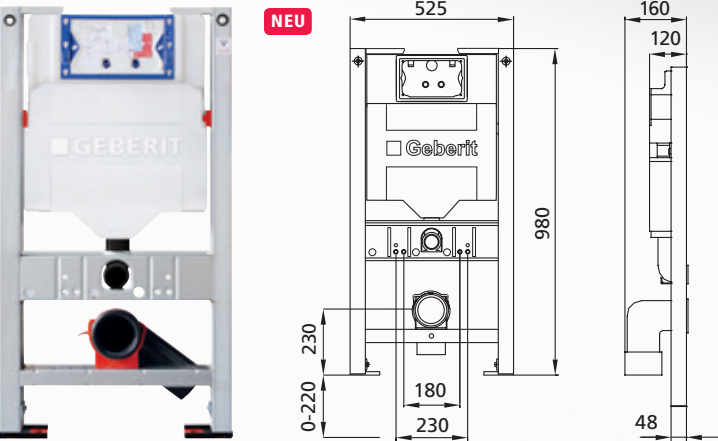

Children's wall-hung WC

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection elbow made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated Geberit Sigma concealed cistern  
with dual flush technology or  
built-in, condensation-insulated Burda concealed cistern K770  
with dual-flush technology
- Construction protection for inspection opening
- Building plugs for inlet and outlet pipe
- All fixing and installation accessories
- Adjustable foot supports up to max. 0-220 mm
- Cistern connection bracket  
and integrated or separate angle valve
- Operation from the front


Dimensions: W / H / D 525 / 980 / 160 mm (with drain)  
Suitable for toddler/child wall-hung WC.

**Accessories:**  
Sound-decoupled wall bracket for pre-wall installation, page 50  
Flush plates and flushing systems from page 65

| Design                                                   | Ref. no.  |
|----------------------------------------------------------|-----------|
| Children's wall-hung WC<br>Installation height 980 mm    |           |
| Geberit concealed cistern Sigma<br>with 2-quantity flush | 211084.01 |
| Burda concealed cistern K770<br>with 2-quantity flush    | 211151.00 |



## BS+ wall-mounted WC element for odour extraction exhaust air

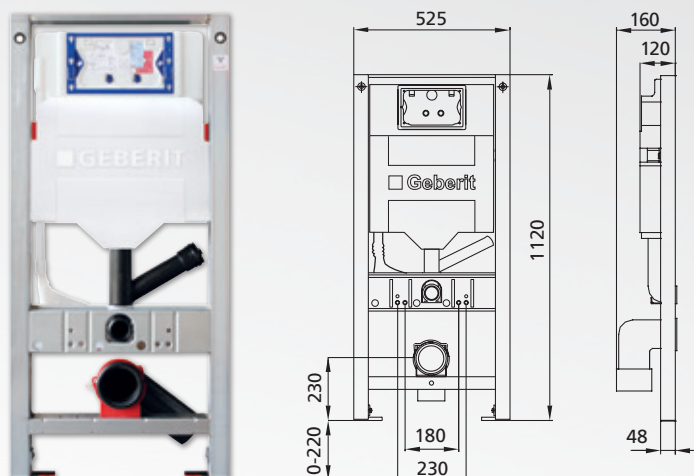

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99)  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 47  
Flush plates and flushing systems from page 59

### Note:

WC power brackets for WC ceramics with small contact surface  
less 17 cm (e.g. Flaminia, Sentique), page 48

### Can also be used as a barrier-free WC element.


| Design                                                                                               | Ref. no.  | Design                                                                                            | Ref. no.  |
|------------------------------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------|-----------|
| Installation height 1120 mm                                                                          |           | Burda cistern K770<br>with 2-quantity flush<br>for odour extraction<br>Exhaust air 50 mm prepared | 220140.00 |
| Geberit cistern Sigma<br>with 2-quantity flush<br>for odour extraction<br>Exhaust air 50 mm prepared | 220088.01 |                                                                                                   |           |

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ wall-hung WC element Height 825 und 980 mm

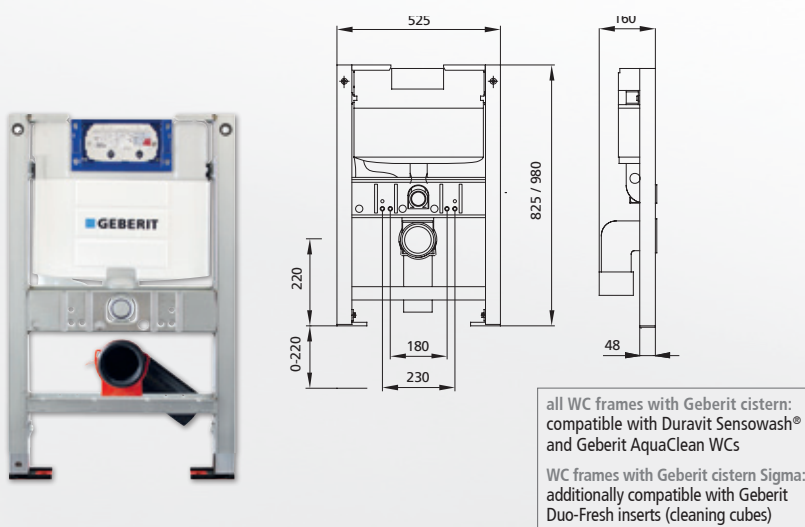

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99)  
and integrated or separate angle valve
- Actuation from the front or top

Dimensions: W / H / D 525 / 825 oder 980 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 48  
Flush plates and flushing systems from page 65

### Note:

The toilet lid only remains in the open position if the distance between  
the wall and the wall to the toilet lid is > 25 mm.  
When using WC ceramics such as those from Geberit/Keramag: Renova  
No. 1, Comprimo 204550, Joly 203060 V&B: Viala 765310, Viala 765210,  
the flush plate must be installed from above.

### Note:


WC power brackets for WC ceramics with small  
contact surface less 17 cm  
(e.g. Flaminia, Sentique), page 48

### Can also be used as a barrier-free WC element.

| Design                                                                       | Ref. no.  | Design                                                                       | Ref. no.  |
|------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------|-----------|
| Installation height 825 mm                                                   |           | Installation height 980 mm                                                   |           |
| Geberit cistern Omega<br>Actuation from above/front<br>with 2-quantity flush | 211390.00 | Geberit cistern Omega<br>Actuation from above/front<br>with 2-quantity flush | 211395.00 |



BS+ double WC element for wall-hung WC

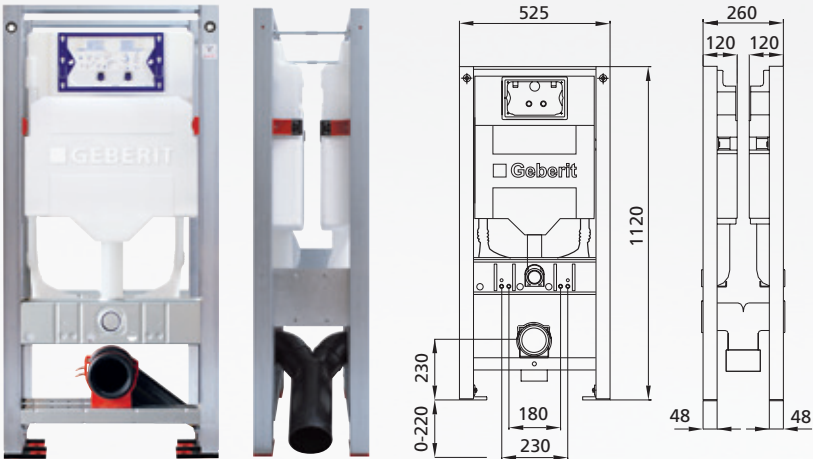

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- HDPE breeches branch DN 80 / 100 / 80
- 2x wall-mounted WC connection fittings
- 2x built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- 2x cistern connection bracket with integrated or separate angle valves
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 260 mm  
Suitable for standard wall-hung WCs.

**Accessories:**  
Flush plates and flushing systems from page 59

**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm  
(e.g. Flaminia, Sentique), page 45

Can also be used as a barrier-free WC element.

Design Ref. no.


Installation height 1120 mm

|                                             |           |
|---------------------------------------------|-----------|
| Geberit cistern Sigma with 2-quantity flush | 211122.01 |
| Geberit cistern Delta with 2-quantity flush | 211222.99 |
| Burda cistern K770 with 2-quantity flush    | 211240.00 |

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs  
  
WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ floor-standing WC element with Geberit cistern Sigma oder Burda cistern K770 for adults

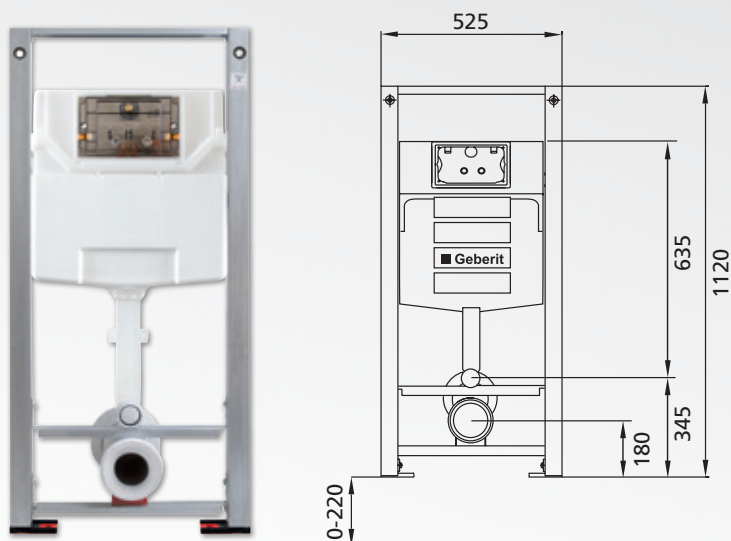

### Adult stand-up WC

Traverse inlet  
(dimension centre inlet height: 345 mm)  
Traverse drain  
(dimension centre drain height: 180 mm)

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Free-standing WC connection set white with cover rosette
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual-flush technology or  
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for adult floor-standing WCs.

#### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50  
Flush plates and flushing systems from page 65.

Design

Ref. no.

### Adult floor-standing WC Installation height 1120 mm

Geberit concealed cistern Sigma 211948.01  
with dual flush


Burda concealed cistern K770 211943.00  
with dual flush



## BS+ floor-standing WC element with Geberit cistern Sigma oder Burda cistern K770 for toddlers/children

One element for  
2 WC ceramics

NEW

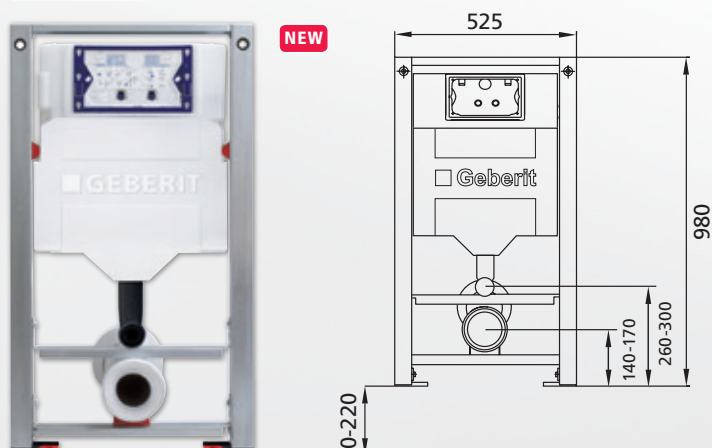

### Toddlers/children Floor standing-WC

Traverse inlet  
(dimension centre inlet height: 260 mm)  
Traverse drain  
(dimension centre drain height: 140 mm)

Traverse preset for toddler

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Free-standing WC connection set white with cover rosette
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual-flush technology or  
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 980 / 160 mm (with waste pipe)  
Suitable for Toddlers/children Floor standing-WC

#### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50  
Flush plates and flushing systems from page 65.

Design

Ref. no.


### Toddlers/children Floor standing-WC Installation height 980 mm

Geberit concealed cistern Sigma 211947.01  
with dual flush

Burda concealed cistern K770 211944.00  
with dual flush



## BS+ WC element for WWC, 112cm with Schell concealed WC flush valve Compact II

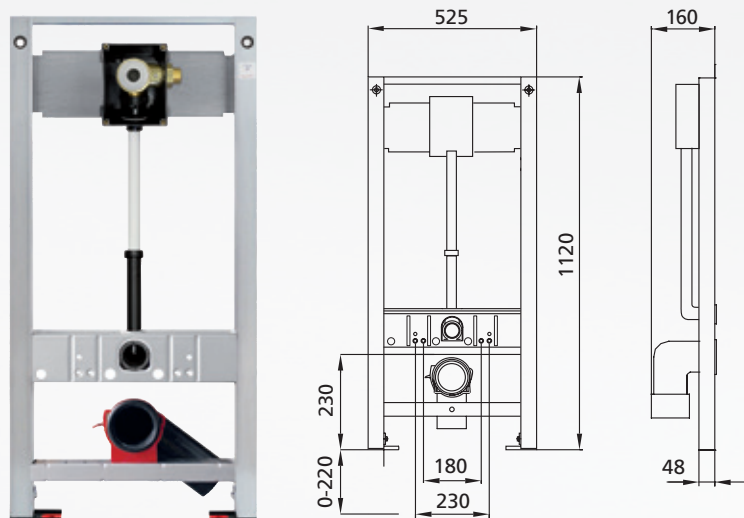

| Design                                     | Ref. no. |
|--------------------------------------------|----------|
| Schell concealed WC flush valve Compact II | 211246   |

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in WC concealed flush valve set Schell WC flush valve Compact II
- Pre-assembled water section made of Dr brass
- Pre-shut-off / connection G3 / 4 AG, right
- Flushing plug G3/4 AG
- Plaster cover

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50  
Flush plates and flushing systems from page 65

### Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48



## BS+ wall-mounted WC element for barrier-free WC facilities

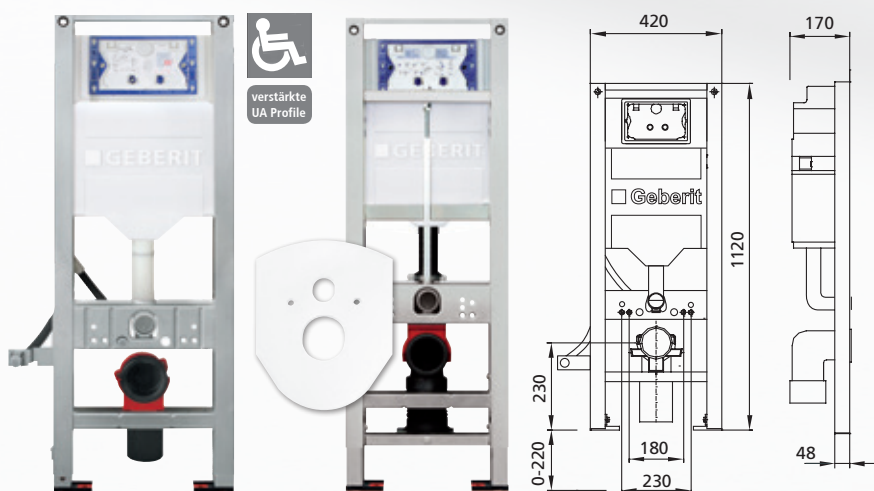

| Design                                          | Ref. no.  | Design                                                                                                            | Ref. no.  |
|-------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------|-----------|
| <b>barrier-free Installation height 1120 mm</b> |           |                                                                                                                   |           |
| Geberit cistern Sigma with 2-quantity flush     | 211148.01 | Geberit cistern Sigma with 2-quantity flush<br>Odour extraction exhaust air<br>50 mm prepared                     | 220099.01 |
| Burda cistern K770 with 2-quantity flush        | 211150.00 | Geberit cistern Sigma with 2-quantity flush<br>with cover plate (white)<br>8 cm height adjustable<br>after tiling | 211090.01 |

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced element width 420 mm
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 420 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50  
Flush plates and flushing systems from page 65

### Note:


WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ wall-mounted WC element for barrier-free WC facilities incl. mounting plates for folding support handles right + left

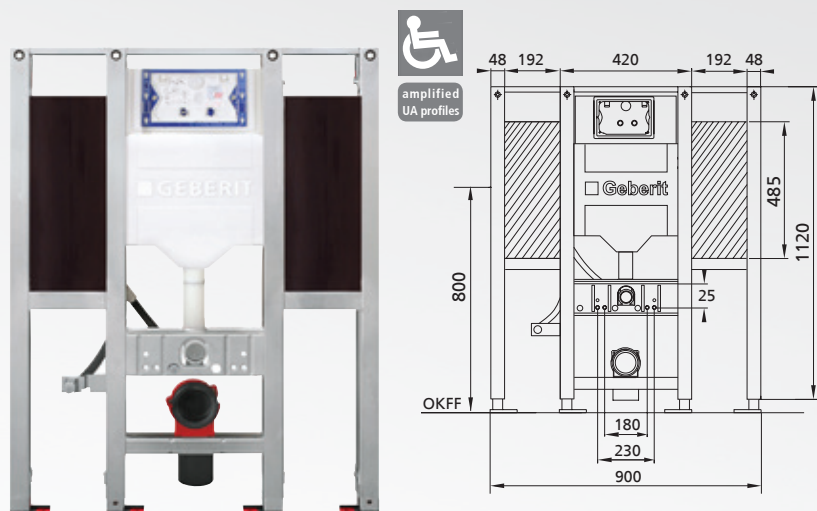

Design Ref. no.

### barrier-free Installation height 1120 mm

Geberit cistern Sigma  
with 2-quantity flush  
Width 880 mm 211600.01

Burda cistern K770  
with 2-quantity flush 211700.00

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Mounting plate right and left
- Actuation from the front

Dimensions: W / H / D 880 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories included:**  
4 Sound-decoupled wall brackets for pre-wall mounting

**Accessories optional:**  
Flush plates and flushing systems from page 65


**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ wall-mounted WC element for barrier-free WC facilities incl. mounting plates for hinged support handles, optionally right / left

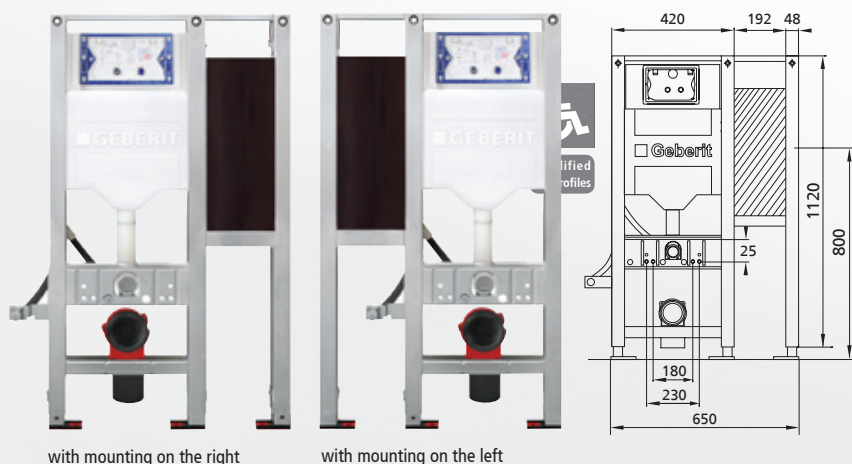

with mounting on the right

with mounting on the left

Design Ref. no.

### with mounting on the right Installation height 1120 mm

Geberit cistern Sigma  
with 2-quantity flush 211606.01  
Burda cistern K770  
with 2-quantity flush 211303.00

Design Ref. no.

### with mounting on the left Installation height 1120 mm

Geberit cistern Sigma  
with 2-quantity flush 211666.01  
Burda cistern K770  
with 2-quantity flush 211330.00

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Mounting plate right or left
- Actuation from the front

Dimensions: W / H / D 750 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories included:**  
3 Sound-decoupled wall brackets for pre-wall mounting

**Accessories optional:**  
Flush plates and flushing systems from page 65

**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 48


all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



BS+ WC element „Reno-Kit“

Replacement module for existing stud walls / pre-wall installations

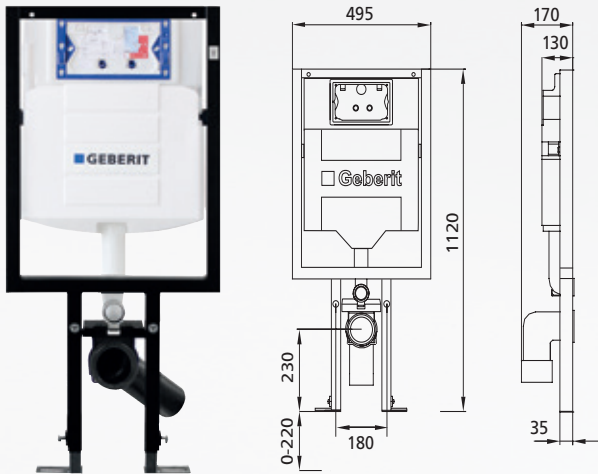

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 495 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories:**  
Flush plates and flushing systems from page 65

Design Ref. no.

barrier-free Installation height 1120 mm


|                                             |           |
|---------------------------------------------|-----------|
| Geberit cistern Sigma with 2-quantity flush | 211630.01 |
| Burda cistern K770 with 2-quantity flush    | 211635.00 |

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



BS+ element for Laufen Bernina / Geberit Publica wall-mounted sinks (formerly Keramag Espital) with concealed cistern, for wall-mounted tap

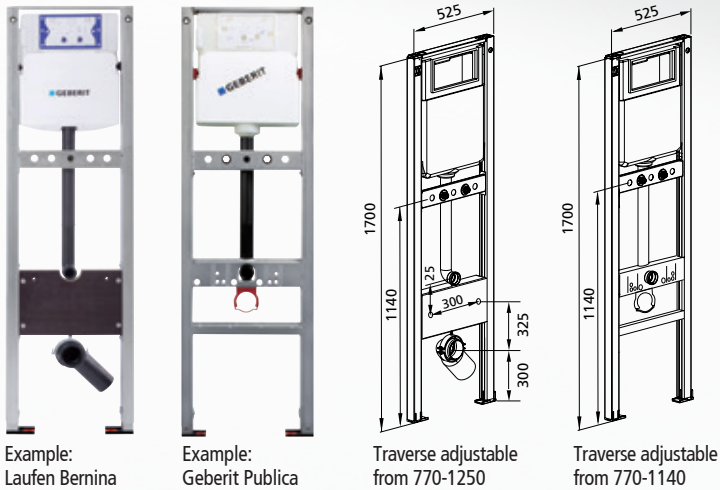

Example:  
Laufen Bernina

Example:  
Geberit Publica

Traverse adjustable  
from 770-1250

Traverse adjustable  
from 770-1140

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211061, 211062) with integrated or separate angle valve
- 2 sound-decoupled, width-adjustable 1/2" wall ducts
- Actuation from the front

Dimensions: W / H / D 525 / 1700 / 160 mm (with waste pipe)

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50  
Flush plates and flushing systems from page 65

Design Ref. no.

Laufen Bernina Installation height 1700 mm

|                                             |           |
|---------------------------------------------|-----------|
| Geberit cistern Sigma with 2-quantity flush | 211057.01 |
| Geberit cistern Delta with 2-quantity flush | 211061.99 |
| Burda cistern K770 with 2-quantity flush    | 211065.00 |


Design Ref. no.

Geberit Publica Installation height 1700 mm

|                                             |           |
|---------------------------------------------|-----------|
| Geberit cistern Sigma with 2-quantity flush | 211060.01 |
| Geberit cistern Delta with 2-quantity flush | 211062.99 |
| Burda cistern K770 with 2-quantity flush    | 211066.00 |



## BS+ washstand element for standing fitting

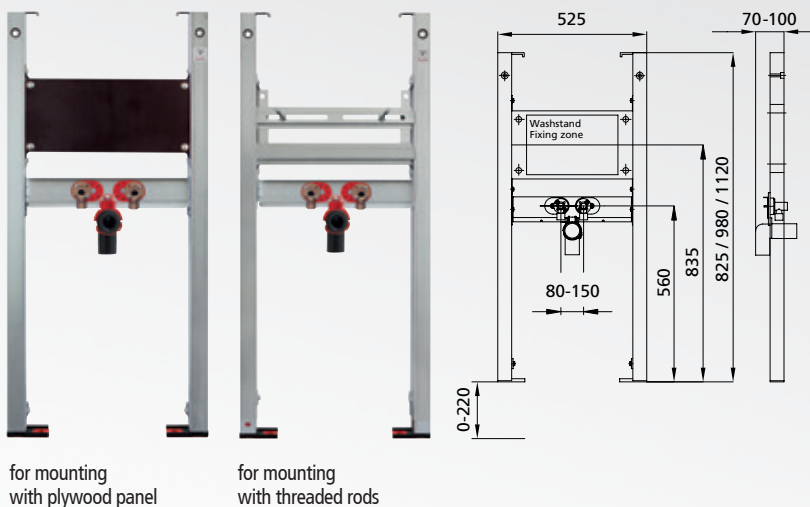

| Design                                                     | Ref. no.  | Design                                                  | Ref. no.  |
|------------------------------------------------------------|-----------|---------------------------------------------------------|-----------|
| <b>Installation height 825-980 mm for standing fitting</b> |           | <b>Installation height 1120 mm for standing fitting</b> |           |
| for fastening with plywood panel                           | 212018.xx | for fastening with plywood panel                        | 212005.xx |
| For fastening with threaded rods                           | 212218.xx | For fastening with threaded rods                        | 212205.xx |

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 70-100 mm (with waste pipe), WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2" .99 without connection



## BS+ washstand element for wall fitting

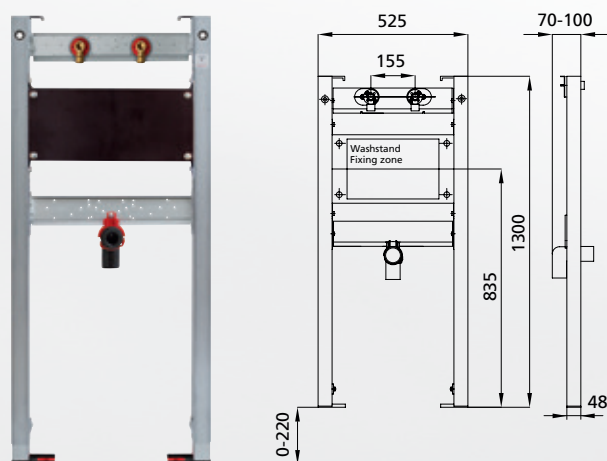

| Design                                              | Ref. no.  |
|-----------------------------------------------------|-----------|
| <b>Installation height 1300 mm for wall fitting</b> | 212029.xx |

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with waste pipe)  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2" .99 without connection



BS+ in-line washstand element, 112 cm, for standing fitting

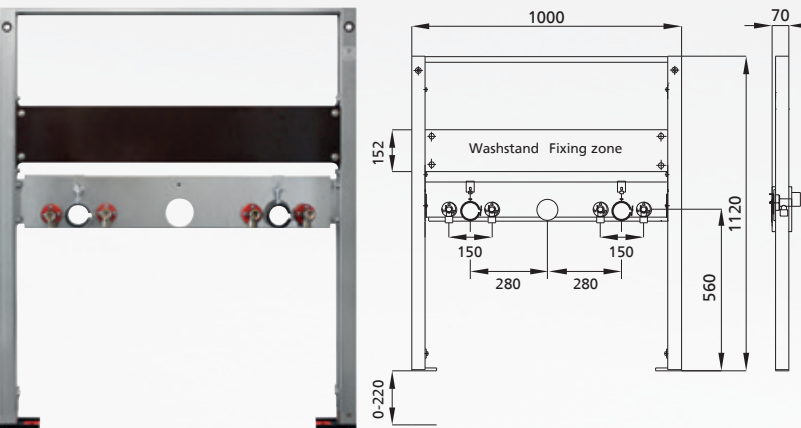

Example 212041.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Connection elbow PE-HD DN 50 mm
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 1000 / 1120 / 70 mm (with waste pipe)  
On request also 825 or 980 mm height


**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**  
Please submit a drawing of the washbasin used with the order.

| Design                                  | Ref. no.  | Design                           | Ref. no.  |
|-----------------------------------------|-----------|----------------------------------|-----------|
| <b>Universal Duo washstand</b>          |           | <b>Universal Duo washstand</b>   |           |
| 2 x stand fittings,<br>1 x centre drain | 212040.00 | 2 x stand fittings,<br>2 x drain | 212041.00 |



BS+ double washstand element

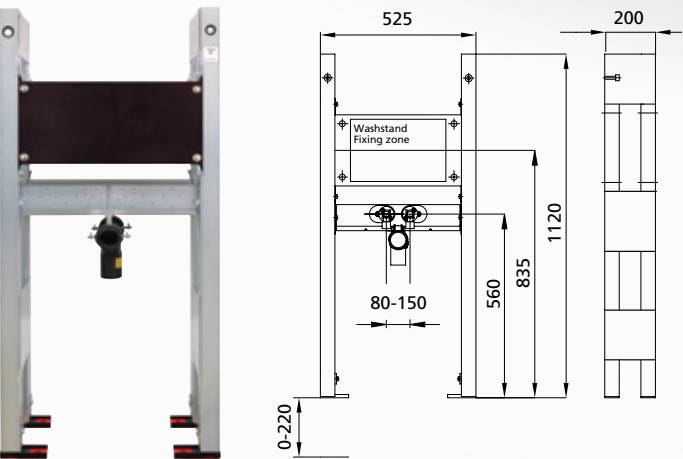

| Design                                                  | Ref. no.  |
|---------------------------------------------------------|-----------|
| <b>Installation height 1120 mm<br/>for wall fitting</b> | 212221.xx |

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- HDPE breeches branch DN 50
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"


Dimensions: W / H / D 525 / 825, 980 or 1120 / 200 mm (with waste pipe)  
WT mounting dimension max. 375 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**  
Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ washstand element for concealed fitting

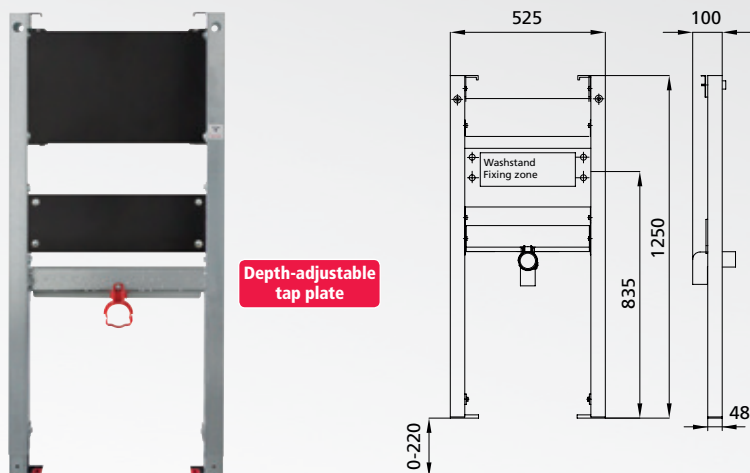

Design

Ref. no.

Installation height 1250 mm  
for concealed fitting

212030.99

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm


Dimensions: W / H / D 525 / 1250 / 100 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



## BS+ washstand element for water meter and concealed shut-off valve

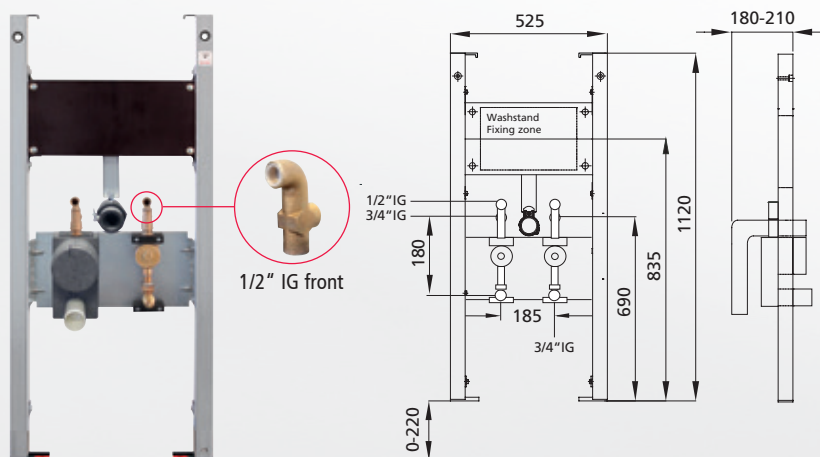

Design

Ref. no.

Installation height 1120 mm  
for free-standing fitting

for 2 water meters

212028.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate
- 2 concealed fitting combinations, gunmetal water meter shut-off valves, incl. insulation, which also serves as a plastering aid, Gunmetal in accordance with DIN-EN 1982 and DIN 50930 Part 6, sealing elements made of EPDM (KTW, W270 tested), consisting of: Concealed single-pipe connection piece for MTK / MTW-NG (2" EAS) incl. dummy cover and gasket set; UP piston valve, free of dead space and low pressure loss, DIN-DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1) 2 sound-insulated brackets; 2-part polystyrene insulation Building material class B1, permissible operating overpressure PB: 10 bar Permissible operating temperature TB: 90 °C, flow medium: drinking water

Dimensions: W / H / D 525 / 1120 / 180-210 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

### Optional:

Pre-assembled shut-off valve set of 2 pieces  
Item no. 960056



## BS+ washstand element for water meter and concealed shut-off valve

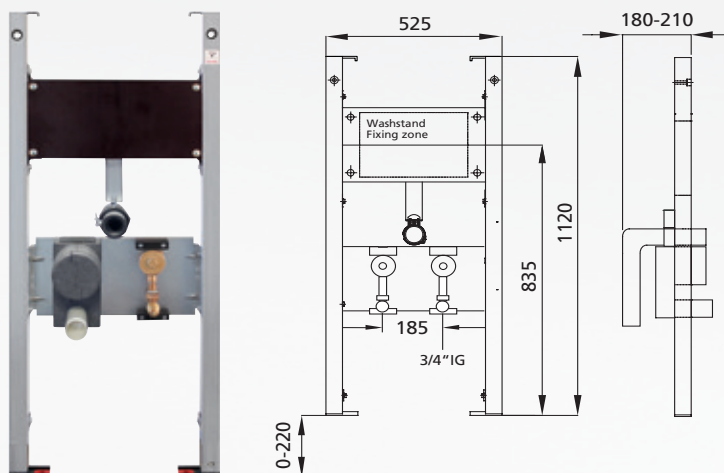

Design

Ref. no.

Installation height 1120 mm  
for free-standing fitting

for 2 water meters  
without connections

212028.99

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate
- Upper part for the barrier, chrome
- 2 concealed fitting combinations, gunmetal water meter shut-off valves, incl. insulation, which also serves as a plastering aid, Gunmetal in accordance with DIN-EN 1982 and DIN 50930 Part 6, sealing elements made of EPDM (KTM, W270 tested), consisting of: Concealed single-pipe connection piece for MTK / MTW-NG (2" EAS) incl. dummy cover and gasket set; UP piston valve, free of dead space and low pressure loss, DIN-DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1) 2 sound-insulated brackets; 2-part polystyrene insulation Building material class B1, permissible operating overpressure PB: 10 bar Permissible operating temperature TB: 90 °C, flow medium: drinking water

Dimensions: W / H / D 525 / 1120 / 180-210 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

### Optional:

Pre-assembled shut-off valve set of 2 pieces  
Item no. 960056



## BS+ washstand element for free-standing fitting for washstand Duravit Scola #68460, #68560

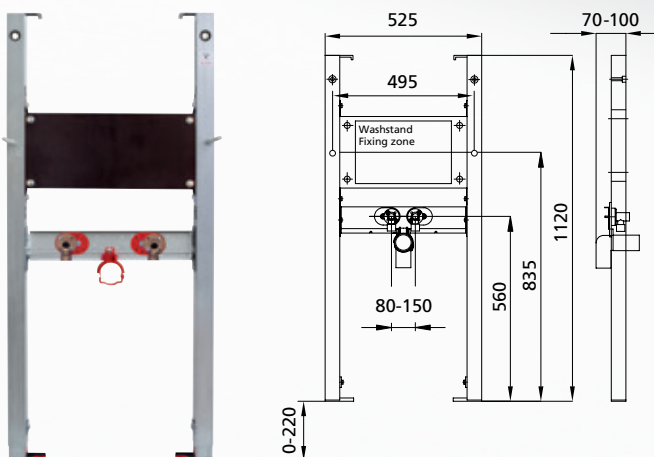

Design

Ref. no.

Installation height 1120 mm  
for free-standing fitting

212007.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Fixing bolt, distance 495 mm

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with waste pipe),  
Surcharge for other connection types on request

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50


### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection





BS+ washstand element for wall fitting  
Barrier-free design with trap

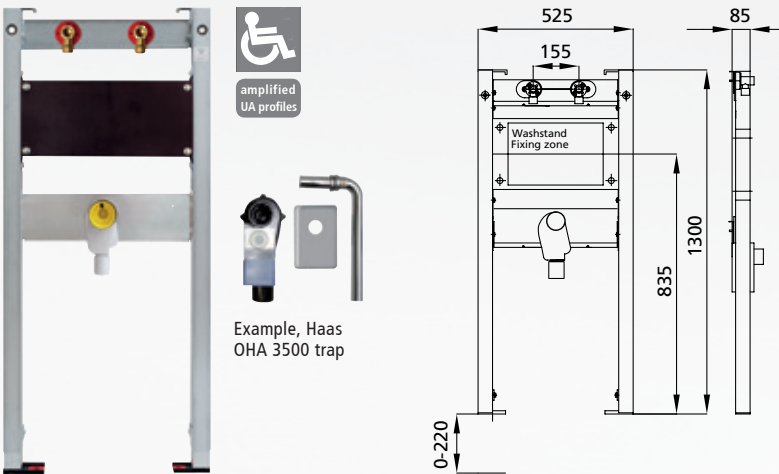

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 85 mm (with waste pipe),  
WT mounting dimension max. 375 mm

Accessories:  
Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**  
Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection


| Design | Ref. no. |
|--------|----------|
|--------|----------|

Installation height 1300 mm  
for wall fitting

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 212143.xx |
| Geberit trap       | 212343.xx |



BS+ washstand element for free-standing fitting  
Barrier-free design for Paracelsus/Vitalis

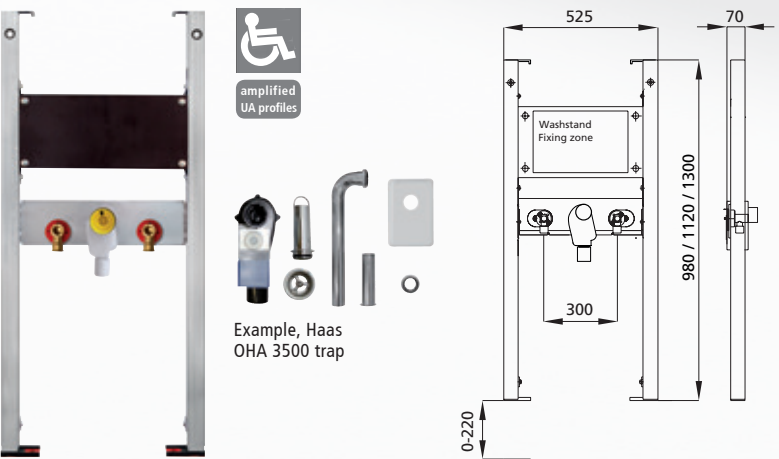

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- built-in trap
- Connecting elbow and cover white and chrome standpipe
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 980, 1120 oder 1300 / 70 mm  
(with waste pipe), WT mounting dimension max. 375 mm

Accessories:  
Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**  
Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection

| Design | Ref. no. |
|--------|----------|
|--------|----------|

Installation height 980 mm  
for free-standing fitting

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 213142.xx |
|--------------------|-----------|

Installation height 1120 mm  
for free-standing fitting

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 213138.xx |
|--------------------|-----------|

|              |           |
|--------------|-----------|
| Geberit trap | 213338.xx |
|--------------|-----------|

| Design | Ref. no. |
|--------|----------|
|--------|----------|


Installation height 1300 mm  
for free-standing fitting

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 213140.xx |
|--------------------|-----------|


|              |           |
|--------------|-----------|
| Geberit trap | 213340.xx |
|--------------|-----------|



**BS+ washstand element for free-standing fitting,**  
Barrier-free design with concealed trap,  
incl. mounting plates for folding support handles right + left

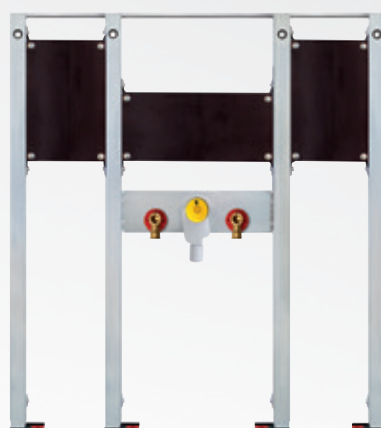

Example Urinal trap,  
Haas OHA 3500

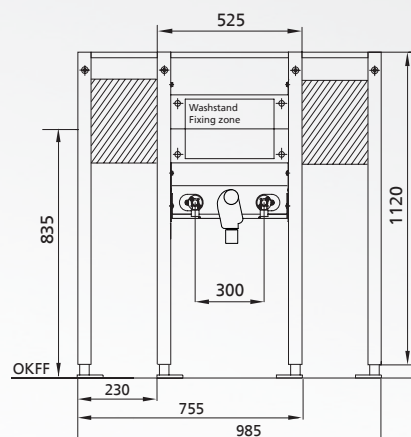

Design Ref. no.

**Installation height 1120 mm**  
**right + left**  
**for free-standing fitting**

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 212616.xx |
| Geberit trap       | 212636.xx |

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Mounting plate left and right

Dimensions: W / H / D 985 / 1120 / 85 mm (with waste pipe), for 2 handles  
WT mounting dimension max. 375 mm

**Accessories:**

Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**


Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



**BS+ washstand element for free-standing fitting,**  
Barrier-free design with concealed trap,  
incl. mounting plates for folding support handles right or left



Example Urinal trap,  
Haas OHA 3500

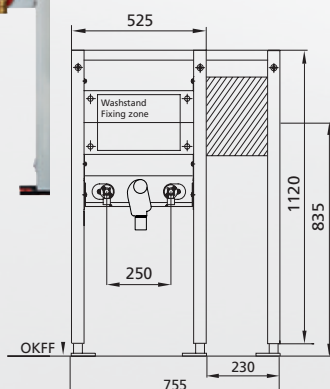

Design Ref. no.

**Installation height 1120 mm**  
**right for free-standing fitting**

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 212676.xx |
| Geberit trap       | 212696.xx |

**left for free-standing fitting**

|                    |           |
|--------------------|-----------|
| Haas OHA 3500 trap | 212160.xx |
| Geberit trap       | 212360.xx |

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Mounting plate left or right

Dimensions: W / H / D 755 / 1120 / 85 mm (with waste pipe), for 1 handle  
WT mounting dimension max. 375 mm

**Accessories:**


Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ sink element for wall fitting

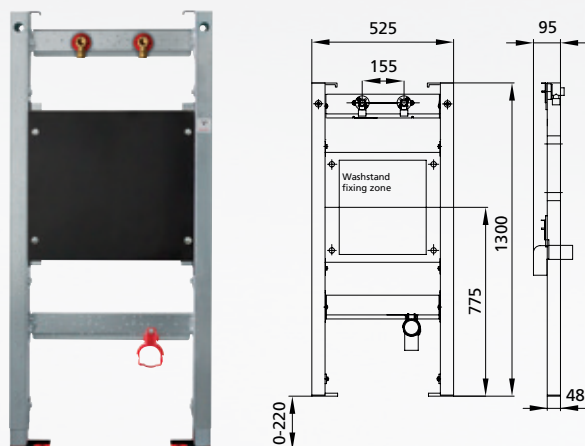

Design

Ref. no.

Installation height 1300 mm for wall fitting 212012.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable sink installation
- swivelling HT urinal trap DN 50
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 95 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ wall-mounted bidet element

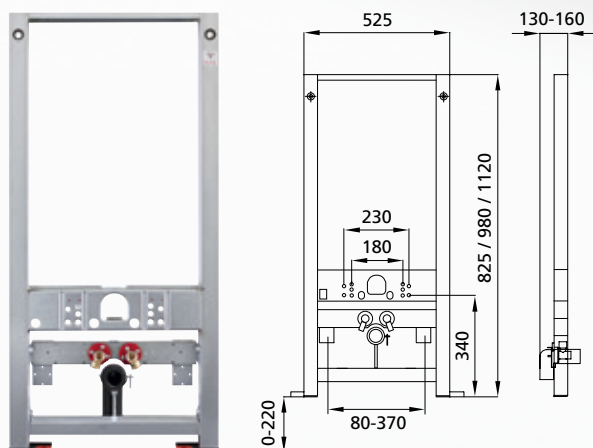

Design

Ref. no.

Installation height 825 mm 233002.xx

Installation height 980 mm 223002.xx

Installation height 1120 mm 213002.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Variable bidet ceramic fittings
- swivelling HT urinal trap DN 50
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 130-160 mm  
(with waste pipe), suitable for bidets, see fitting list (enclosed in the box)

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection

### Note:

With some ceramics, it may be necessary to mount the supplied clamp in the crossbar from below rather than from above, so that the abutment (absorbs the force of the ceramic) as close as possible to the back of the ceramic.


In some assembly cases, it may also be necessary the threaded rod must be shortened accordingly.

These points should be clarified beforehand by looking at the ceramic.

As the manufacturer, we do not accept any liability for incorrect installation!



## BS+ urinal element with concealed flush valve or shell set and empty element

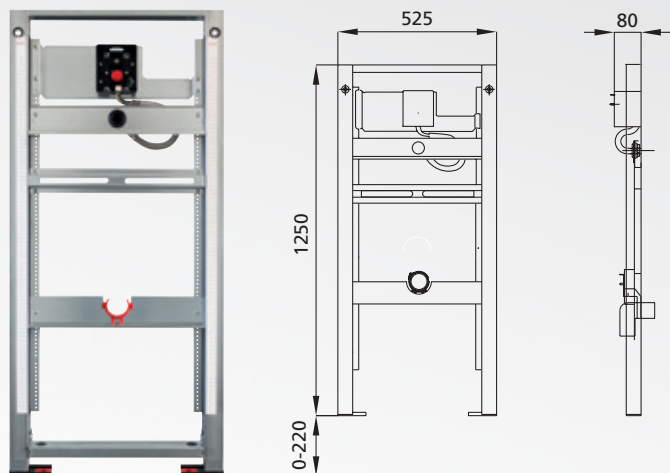

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- swivelling drain elbow DN 50
- Pre-assembled flush-mounted flush valve or pipework set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap (#255101, 255102, 255103 und 255104 ohne),
- Urinal connection set (#255101, 255102, 255103 und 255104 ohne),

Dimensions: W / H / D 525 / 1120-1250 / 80 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:


Suitable for urinals, see fitting list (enclosed in the box).



| Design                                   | Ref. no. | Design                                                                      | Ref. no. |
|------------------------------------------|----------|-----------------------------------------------------------------------------|----------|
| <b>Installation height 1250 mm</b>       |          |                                                                             |          |
| Burda flush valve U-05/06                | 214029   | Blank element Universal for surface-mounted flush valves/ waterless urinals | 214556   |
| Burda flush valve U-05/06 for spray head | 214030   |                                                                             |          |



## BS+ urinal element with flush-mounted shell set Flowtronik

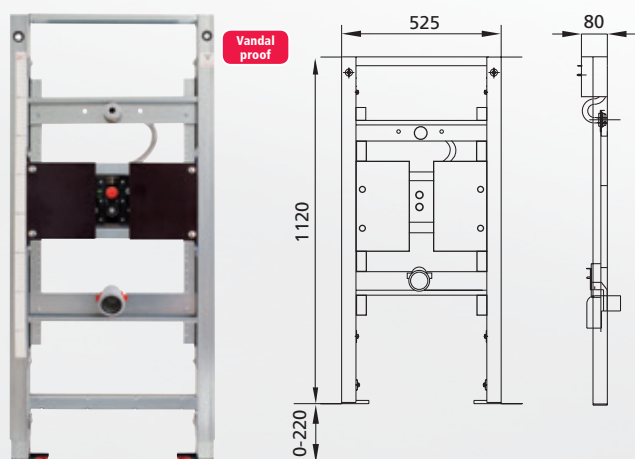

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set with 230 V connection
- Valve block with water shut-off
- Functions: Standard and stadium operation, forced flushing
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal connection set

Dimensions: W / H / D 525 / 1120 / 80 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:


Suitable for urinals with horizontal outlet to the rear (vertical outlet on request), see fitting list (enclosed in the box).

Not suitable for urinals with moulded-in trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.

| Design                                    | Ref. no. |
|-------------------------------------------|----------|
| <b>Installation height 1120 mm</b>        |          |
| Burda shell set Flowtronik                | 214800   |
| Burda shell set Flowtronik for spray head | 214801   |



BS+ urinal-element  
with flush-mounted shell set Geberit VS

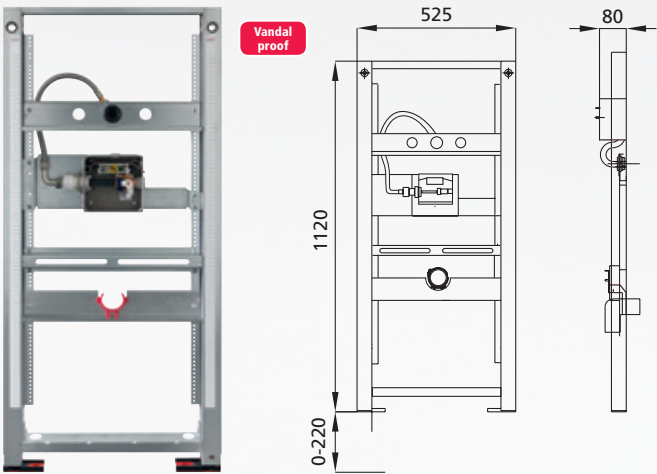

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set with 230 V connection
- Valve block with water shut-off
- Functions: Standard and stadium operation, forced flushing
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal connection set

Dimensions: W / H / D 525 / 1120 / 80 mm

**Accessories:**  
Urinal flushing systems from page 98  
Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**  
Suitable for urinals with horizontal outlet to the rear  
(vertical outlet on request), see fitting list (enclosed in the box).

Not suitable for urinals with moulded-in trap,  
e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.


| Design | Ref. no. |
|--------|----------|
|--------|----------|

Installation height 1120 mm

|                                                         |        |
|---------------------------------------------------------|--------|
| Geberit shell set Universal<br>for VS                   | 214718 |
| Geberit shell set Universal<br>for VS<br>for spray head | 214720 |



BS+ urinal element  
with flush-mounted shell set or electronics

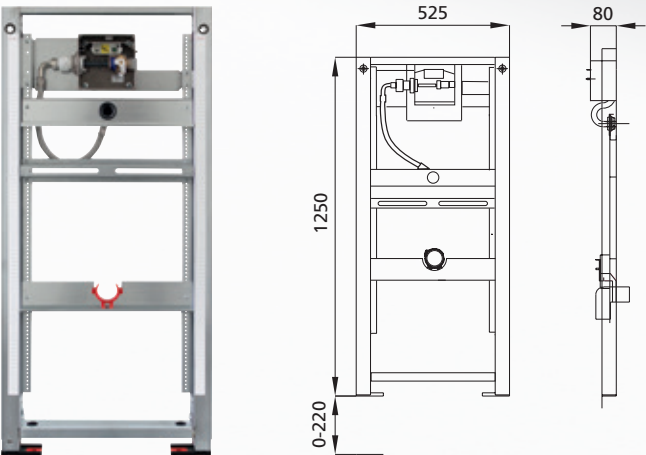

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1120 - 1250 / 80 mm

**Accessories:**  
Urinal flushing systems from page 98  
Sound-decoupled wall brackets for pre-wall installation, page 50

**Note:**  
Suitable for urinals, see passport list (enclosed in the box).


| Design | Ref. no. | Design | Ref. no. |
|--------|----------|--------|----------|
|--------|----------|--------|----------|

Installation height 1250 mm

|                                                                           |        |                          |        |
|---------------------------------------------------------------------------|--------|--------------------------|--------|
| Geberit shell set universal<br>for HyTronic and HyTouch                   | 214712 | for Geberit Flushcontrol | 214856 |
| Geberit shell set universal<br>for HyTronic and HyTouch<br>for spray head | 214714 | for Duravit Utronic      | 214506 |



## BS+ urinal-element with flush-mounted shell set or electronics

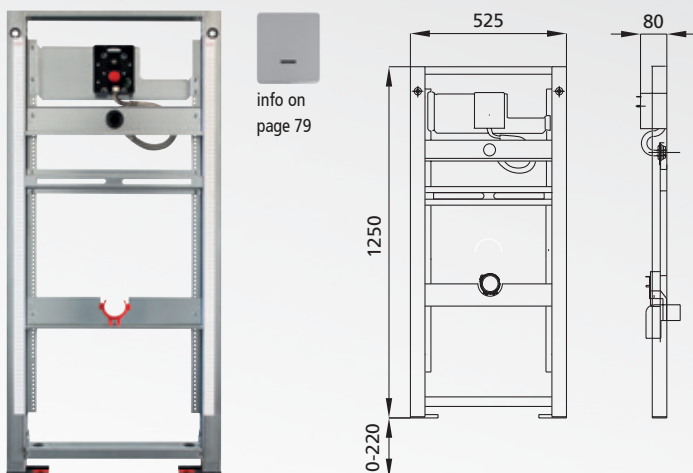

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1250 / 80 mm

### Accessories:

Urinal flushing systems from page 98

Sound-decoupled wall brackets for pre-wall installation, page 50

### Note:

Suitable for urinals, see passport list (enclosed in the box).

| Design | Ref. no. | Design | Ref. no. |
|--------|----------|--------|----------|
|--------|----------|--------|----------|

### Installation height 1250 mm

with Burda shell set  
for infrared electronics,  
for BurdaTronic U-09


214989

Mit Burda shell set  
for infrared electronics,  
for BurdaTronic U-09  
for spray head

214889



## BS+ shower element with pre-mounted Geberit drain

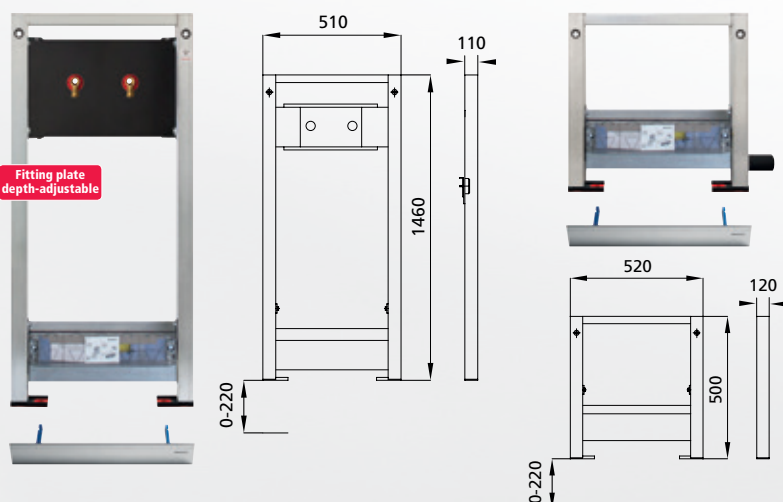

For installation in a stud wall in accordance with DIN 18183  
or in conjunction with accessory set art. no. 240012 as a single  
element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings
- Pre-assembled Geberit shower drain for draining floor-level showers, cover, plastic chrome

Dimensions: W / H / D 525 / 1460 / 80 mm,

Dimensions: W / H / D 525 / 500 / 80 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50

### Prefabricated set for Geberit wall drain,



- Removable for cleaning
- With cover and allen key

| Design | Ref. no. | Design | Ref. no. |
|--------|----------|--------|----------|
|--------|----------|--------|----------|

Drain DN40 for screed height  
at inlet 65-90 mm  
Installation height 1460 mm

for surface-mounted fittings 230120.00

for flush-mounted fittings 218010

Installation height 500 mm 230125

Drain DN50 for screed height  
at inlet 90-200 mm  
Installation height 1460 mm

for surface-mounted fittings 230121.00

for flush-mounted fittings 218011

Installation height 500 mm 230126

| Design | Ref. no. |
|--------|----------|
|--------|----------|


brushed stainless steel 230040

brushed stainless steel  
(for screwing) 230041

polished stainless steel 230042



BS+ shower element for showerhead

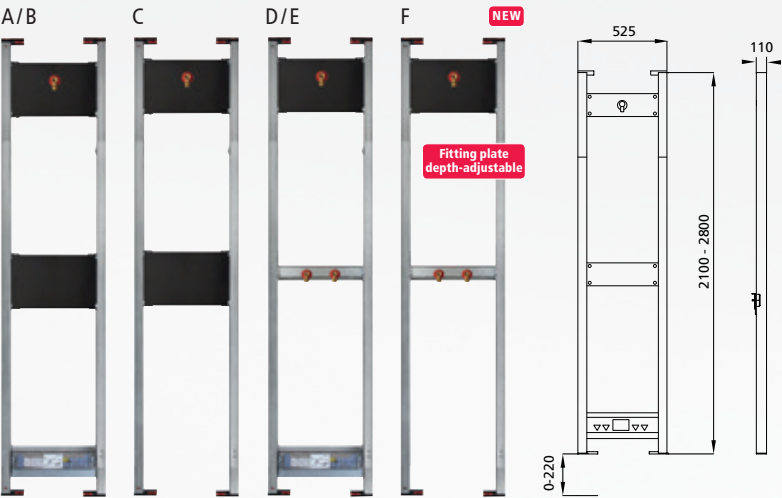

For installation in a stud wall in accordance with DIN 18183 or in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings
- Crossbar for shower head
- Pre-assembled Geberit shower drain SH 30, sealing water height 30 mm, Drain DN40, for draining floor-level showers, cover Chrome plastic


Taverses are height and depth adjustable 40-110mm  
Dimensions: W / H / D 525 / 2100 - 2800 / 110 mm

Accessories:  
Sound-decoupled wall brackets for pre-wall installation, page 50

| Design                                                                                                  | Ref. no. | Design                                                                                                        | Ref. no.  |
|---------------------------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------------------------------|-----------|
| A: for concealed fittings and Geberit wall drain<br>Drain DN40 for screed height at the inlet 65-90 mm  | 235300   | D: for surface-mounted fittings and Geberit wall drain<br>Drain DN40 for screed height at the inlet 65-90 mm  | 235350.00 |
| B: for concealed fittings and Geberit wall drain<br>Drain DN50 for screed height at the inlet 90-200 mm | 235301   | E: for surface-mounted fittings and Geberit wall drain<br>Drain DN50 for screed height at the inlet 90-200 mm | 235351.00 |
| C: for concealed fittings                                                                               | 235200   | D: for surface-mounted fittings                                                                               | 235250.00 |



BS+ bathtub element

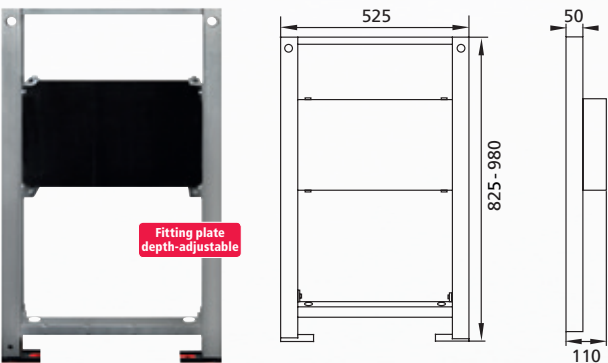

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings

Taverses are height and depth adjustable 40-110mm  
Dimensions: W / H / D 525 / 825-980 / 110 mm

Installation Height 1120 mm also possible on request!

| Design          | Ref. no. |
|-----------------|----------|
| bathtub element | 235400   |



## BS+ element for built-in wardrobe for the installation of instantaneous water heaters



| Design                                         | Ref. no.  |
|------------------------------------------------|-----------|
| Element for instantaneous water heater cabinet | 215010.00 |
| Built-in wardrobe 30 cm                        | 403160    |
| Element for Toilet brush cabinet               | 215007.00 |

- Galvanised, self-supporting and sound-decoupled steel construction
  - All fastening and mounting accessories
  - Adjustable footrests up to max. 0-220 mm
- for mounting cuckoo built-in furniture**

### Element for built-in cabinet for instantaneous water heater

- Wall bushings 1/2"
  - Cut-out for flush-mounted electrical box
- Dimensions: W / H 450 / 1120 mm

### Built-in cabinet for instantaneous water heater

White silk matt lacquered front, door hinge right or left  
Dimensions: W 300 mm

All wardrobe elements suitable for Burda cuckoo furniture series

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



## BS+ element for built-in wardrobe with integrated toilet brush



| Design                                                                                                 | Ref. no. |
|--------------------------------------------------------------------------------------------------------|----------|
| Built-in wardrobe 20 cm with integrated toilet brush                                                   | 403055   |
| Cabinet elements on request also in 60 cm width, 90 cm width and 120 cm height, 80 cm height available |          |

- Galvanised, self-supporting and sound-decoupled steel construction
  - All fastening and mounting accessories
  - Adjustable footrests up to max. 0-220 mm
- for mounting cuckoo built-in furniture**

### Element for built-in cabinet for toilet brush

Dimensions: W / H 350 / 1120 mm

### Built-in cabinet with integrated toilet brush

White silk matt lacquered front, incl. one glass shelf and brush holder with brush in chrome, door hinge right or left  
Dimensions: W 200 mm

All wardrobe elements suitable for Burda cuckoo furniture series


### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 50



BS+ Fastening elements

For mounting grab rails, support rails and folding handles or folding shower seats

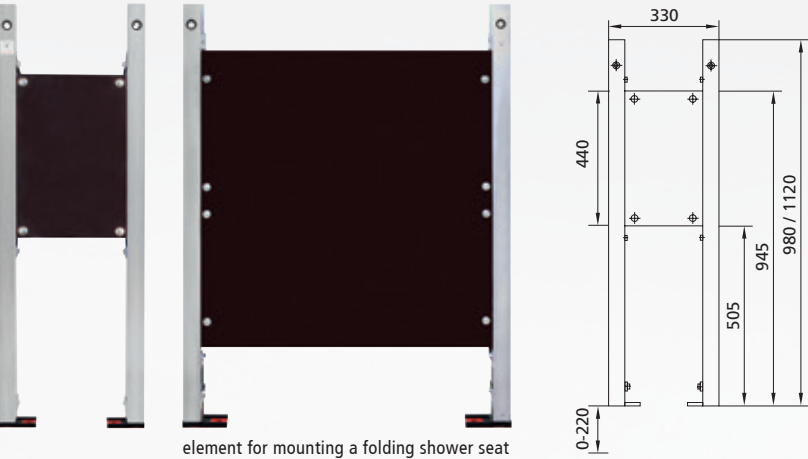

element for mounting a folding shower seat

For **holding, supporting and folding handles** et cetera  
For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- Built-in mounting plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 330 / 980 or 1120 / 50 mm

Element to accommodate a **folding shower seat**  
For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- Built-in mounting plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm


Dimensions: W / H / D 850 / 1120 / 50 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50



| Design                                                   | Ref. no. | Design                                           | Ref. no. |
|----------------------------------------------------------|----------|--------------------------------------------------|----------|
| <b>Retaining element for support and folding handles</b> |          | <b>Retaining element for folding shower seat</b> |          |
| Installation height 980 mm                               | 241022   | Installation height 1120 mm                      | 242022   |
| Installation height 1120 mm                              | 240022   |                                                  |          |

BS+ element for surface-mounted / concealed fittings

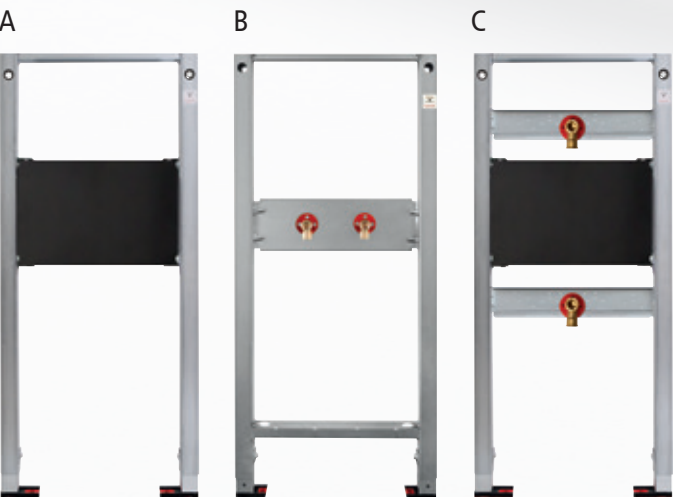

For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings


Dimensions: W / H 525 / 1120 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50

| Design                                  | Ref. no.  |
|-----------------------------------------|-----------|
| <b>Installation height 1120 mm</b>      |           |
| A: for flush-mounted fittings           | 218008    |
| B: for surface-mounted fittings         | 230108.xx |
| C: Wall fitting for showers and bathtub | 230109    |



Universal traverse for surface-mounted / flush-mounted fittings  
ventilation, sanitary flushes and other built-in appliances

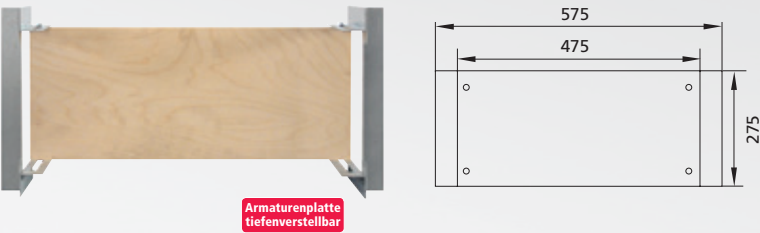


| Design | Ref. no. |
|--------|----------|
|        | 215033   |

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories

Dimensions: W / H / D 575 / 275 / 50-150 mm



BS+ Universal traverse  
for surface-mounted taps / tap valve  
heavy duty / reinforced

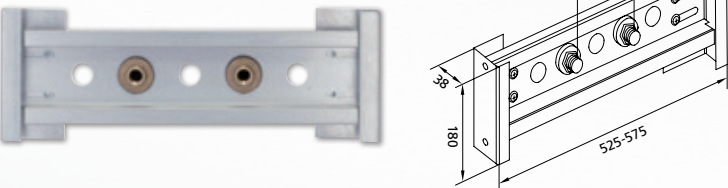


| Design               | Ref. no.  |
|----------------------|-----------|
| A: with 2 wall ducts | 215006.00 |
| B: with 1 wall duct  | 216210.00 |

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Sound-decoupled, width-adjustable 1/2" wall ducts

Dimensions: W / H / D 525-575 / 180 / 38 mm



BS+ universal traverse  
for surface-mounted taps / tap valve

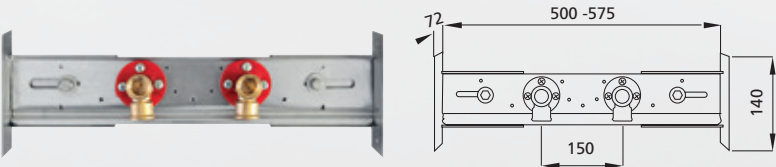


| Design               | Ref. no.  |
|----------------------|-----------|
| A: with 2 wall ducts | 215005.00 |
| B: with 1 wall duct  | 216209.00 |

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Sound-decoupled wall discs 1/2"

Dimensions: W / H / D 500-575 / 140 / 72 mm



BS+ traverse for washing machine

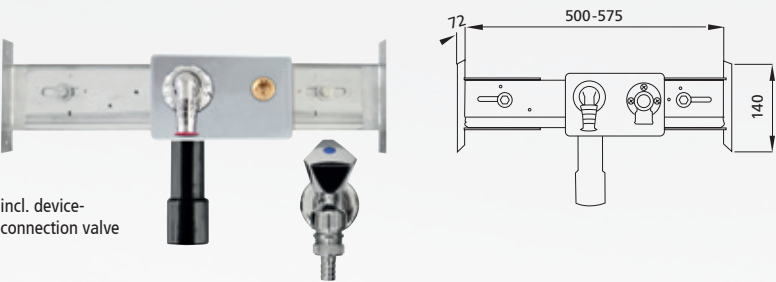

incl. device-connection valve


- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Urinal trap WM and wall disc 1/2"

Dimensions: W / H / D 500-575 / 140 / 72 mm

| Design                                  | Ref. no. |
|-----------------------------------------|----------|
| with urinal trap WM and 1/2" connection | 216004   |



BS+ Traverse for kitchen sink

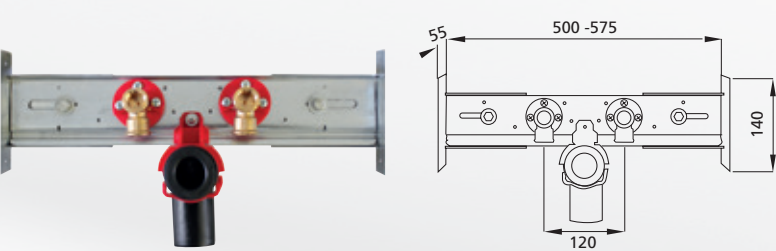


- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Two sound-decoupled wall discs 1/2"
- Drain elbow DN50

Dimensions: W / H / D 500-575 / 140 / 72 mm

| Design                               | Ref. no.  |
|--------------------------------------|-----------|
| with wall discs and drain elbow DN50 | 216100.00 |
| with drain elbow DN50                | 215013    |



BS+ traverse for flush-mounted fittings / flush-mounted valves

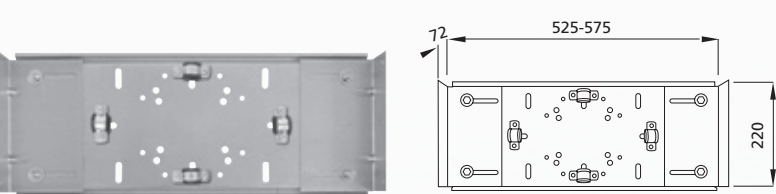


- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories

Dimensions: W / H / D 525-575 / 220 / 72 mm

| Design                                                          | Ref. no. |
|-----------------------------------------------------------------|----------|
| with 4 sound-decoupled pipe clamps to hold the concealed valves | 216003   |



## BS+ traverse for water meter

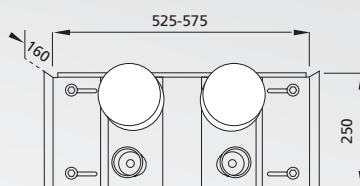

| Design | Ref. no. |
|--------|----------|
|        | 215015   |

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- 2 flush-mounted single-pipe connection piece for MTK / MTW-NG (2" EAS KOAX) incl. dummy cover and gasket set
- 2 Concealed piston valve, free of dead space and low pressure loss (DIN DVGW tested with sound insulation to DIN 4109 (fitting group 1))
- 4 sound-insulated brackets
- 2 two-part polystyrene insulations - building material class B1 (permissible operating overpressure PB: 10 bar, permissible operating temperature TB: 90°C, flow medium: drinking water)

Dimensions: W / H / D 525-575 / 250 / 160 mm




## BS+ Washbasin traverse for floor-standing tap



version A



version B



| Design                                                     | Ref. no.  |
|------------------------------------------------------------|-----------|
| <b>Version A</b><br>with mounting plate<br>made of plywood | 230300.xx |

| Design                                                  | Ref. no.  |
|---------------------------------------------------------|-----------|
| <b>Version B</b><br>with fastening<br>via threaded rods | 230301.xx |

### For installation in a stud wall in accordance with DIN 18183.

- Galvanised sheet metal construction
- Mounting plate for variable washbasin installation
- swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and installation accessories
- Fitting plate to hold the wall discs
- 2 sound-decoupled connection mountings
- Wall discs 1/2"

Version A Dimensions: W / H / D 525 / 485 / 70 mm

Version B Dimensions: W / H / D 525 / 485 / 50 mm



### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ universal mounting plate

For holding, supporting and folding handles

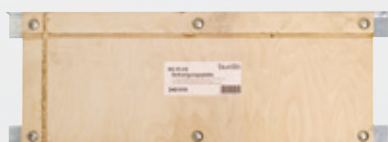

| Design | Ref. no. |
|--------|----------|
|        | 240015   |

### For holding mirrors, shelves, grab rails, support and folding handles et cetera


### For installation in a stud wall in accordance with DIN 18183.

- Galvanised sheet metal construction
- built-in mounting plate made of plywood (245 mm high, 30 mm thick) for individual fastening of heavy loads
- All mounting and installation accessories

Dimensions: Plywood panel W / H / D 625 / 245 / 30 mm  
With fixing bracket W / H / D 625 / 685 / 30 mm



BS+ right / left holding element with one foot for holding, supporting and folding handles

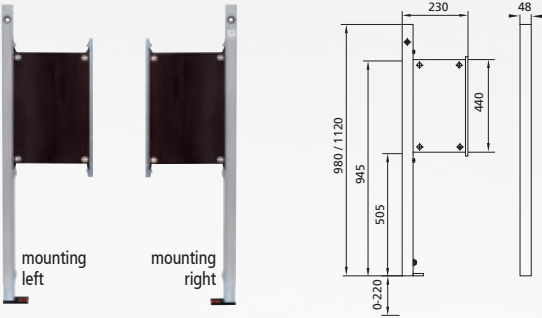

| Design                              | Ref. no. | Design                               | Ref. no. |
|-------------------------------------|----------|--------------------------------------|----------|
| Installation height 980 mm<br>right | 240043   | Installation height 1120 mm<br>right | 240023   |
| left                                | 240044   | left                                 | 240024   |

Can be used for installation in a pre-wall.

- Galvanised, self-supporting and sound-decoupled steel construction, with one profile, with built-in fastening plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 230 / 980 oder 1120 / 50 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50



BS+ / Santro WC support brackets for WC ceramics with a small contact surface



| Design | Ref. no. |
|--------|----------|
| 1 Paar | 216400   |

For additional support of WC ceramics  
Support surfaces smaller than 17 cm (e.g. Flaminia, Sentique)



Side end element right / left



| Design                                    | Ref. no.   |
|-------------------------------------------|------------|
| Installation height 825 mm<br>right/left  | on request |
| Installation height 980 mm<br>right/left  | on request |
| Installation height 1120 mm<br>right/left | 219001     |

Can be used for installation in a pre-wall.

For extending an extension section and for bridging distances  
distances over 625 mm wide between sanitary modules et cetera

- Galvanised, self-supporting and sound-decoupled steel construction, with one profile, with built-in fastening plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 48 / 825, 980 oder 1120 / 48 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 50



## BS+ extension for wall bracket for wall mounting (240008 and 240012) up to 400 mm



| Design | Ref. no. |
|--------|----------|
|        | 240010   |



## BS+ extended feet





| Design                                          | Ref. no. |
|-------------------------------------------------|----------|
| For floor construction<br>up to 400 mm (1 pair) | 215101   |
| For floor construction<br>up to 600 mm (1 pair) | 215100   |

- For raised floor construction
- Suitable for all BS+ elements
- Version: In pairs
- Galvanised with plastic feet



## BS+ corner mounting set



| Design | Ref. no. |
|--------|----------|
| 1 pair | 218106   |

For mounting BS+ units as a 45° corner solution.

- Galvanised mounting bracket
- Additional upper corner planking support
- All mounting and assembly accessories



Sound-decoupled wall bracket for front wall mounting, mounting depth 140 -190 mm extendable



Premium wall bracket (since January 2018)

Wall bracket

| Design               | Ref. no. |
|----------------------|----------|
| Premium wall bracket | 240012   |
| Wall bracket         | 240008   |

- New version**
- 2 sound-decoupled wall supports M10
  - All mounting and assembly accessories
  - 2 support brackets
- Old version**
- 2 sound-decoupled wall supports M10
  - All mounting and assembly accessories



BS+ foot mounting on rear wall e.g. for underfloor heating



| Design | Ref. no. |
|--------|----------|
| 1 pair | 240020   |

- 2 galvanised wall supports
- All mounting accessories



universal mounting set



e.g. mounting on the wall

| Design | Ref. no. |
|--------|----------|
| 1 pair | 240040   |

- 2 sound-decoupled wall supports M10
- All mounting and assembly accessories

