


Meroblock DUO WC element for wall-hung WC, 112 cm with concealed cistern Geberit Sigma for front actuation, for dual flush

Completely soundproofed ex works

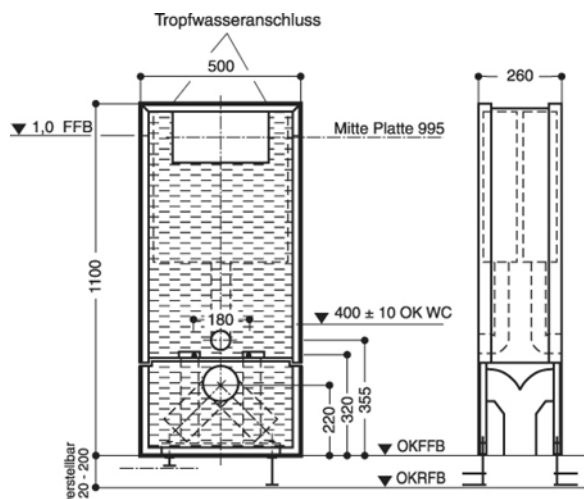

Intended use

- For drywall
- for brick walls
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For wall-hung toilets with connection dimensions in accordance with DIN EN 33:2011-11
- Suitable for wall-hung WCs with projection up to 62 cm
- For 1-quantity, 2-quantity or flush-stop flushing
- For floor constructions 0-20 cm

Features

- Self-supporting closed sendzimir galvanised installation module, with a corrosion-protected sectional steel construction, with structure-borne sound decoupled sanitary technology, expanded metal surface suitable for tiling, plastering and planking, block-filling sound, heat and condensation insulation
- Galvanised footrests, adjustable 0-20 cm
- T-pipe can be mounted without tools
- Sound-insulated t-pipe attachment
- Concealed cistern with front actuation, insulated against condensation
- Immediate flushing possible with factory setting
- Installation and service work on the concealed cistern without tools
- Water connection at the rear or top centre
- Construction protection for service opening protects against moisture and dirt
- Construction protection for service opening can be cut to length
- Suitable for Duravit Sensowash C
- Equipped with empty pipe for water supply line for connecting Geberit AquaClean appliances
- Suitable for all actuator plates in the Sigma series
- Suitable for insertion of cleaning cubes

Scope of delivery

- 2 Water connection R 1/2, MeplaFix-compatible, with integrated angle valve and handwheel
- 2 Construction protection for service opening
- 4 Protective plugs
- 2 Connection set for WC, DN 90 mm
- Swivelling T-pipe made of PE-HD, DN 90/110/90 mm
- 4 threaded rods M12
- Fixing material

Make: Burda

Type: BS+

Item no.: WC5-12-26-1