


Meroblock Washstand element 110 cm für floor-standing fitting
Connection on the right and left side for looping through

Completely soundproofed ex works

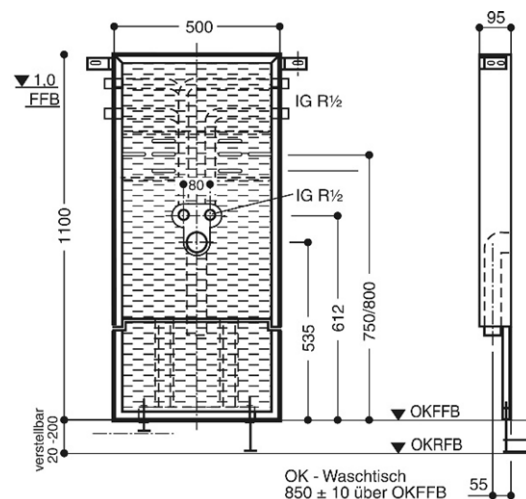

Intended use

- For drywall
- for brick walls
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For mounting washstands
- For floor-standing fittings
- For floor constructions 0-20 cm

Features

- Self-supporting closed sendzimir galvanised installation module, with a corrosion-protected sectional steel construction, with structure-borne sound decoupled sanitary technology, expanded metal surface suitable for tiling, plastering and planking, block-filling sound, heat and condensation insulation
- Galvanised footrests, adjustable 0-20 cm
- Washstand mounting distance 13-45.5 cm adjustable
- Fastening connection elbow soundproofed
- Top edge of washbasin 850 mm
- Drinking water connections from above

Scope of delivery

- 4 Anschlusswinkel R 1/2
- 4 sound insulation pads
- 2 insulating sleeves
- Connection bend made of PE-HD, DN 50 mm
- Seal DN 32 mm
- 2 threaded rods M10
- Fixing material
- Installation space cover

Make: Burda

Type: Meroblock

Item no.: WTS3-18-59