


**BS+** WC element for WWC, 112 cm with Geberit Sigma concealed cistern for front operation, for dual flush, barrier-free, for support and grab rails on the left/right with Power & Connect Box

**Sound-insulated with optional premium wall brackets for pre-wall mounting**

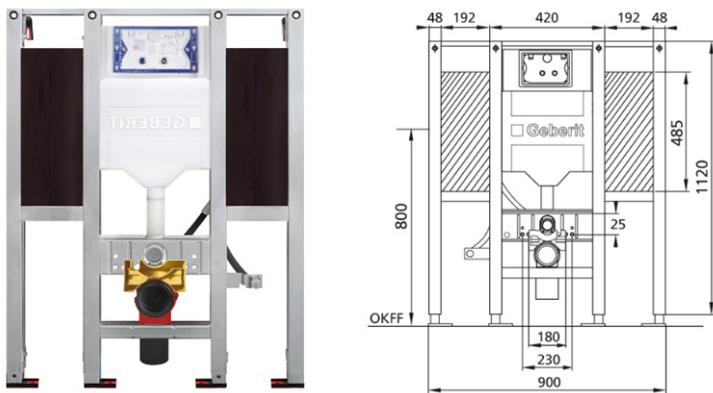

### Intended use

- For drywall construction
- For installation in partial or room-height pre-wall installations
- For installation in room-height installation walls
- Suitable for barrier-free construction
- For wall-mounted toilets with connection dimensions in accordance with DIN EN 33:2011-11
- Suitable for wall-mounted toilets with a projection > 62 cm
- For attaching support and grab rails
- For single-flush, dual-flush or flush-stop flushing
- For floor structures 0-22 cm

## Features

- Self-supporting Sendzimir galvanised and sound-insulated steel frame, 48 mm
- Frame prepared for mounting WC bearings on WC ceramics with a small support surface
- WC installation height adjustable during the shell construction phase, 41–46 cm
- Galvanised foot supports, adjustable 0–22 cm
- Plastic feet, rotatable, depth suitable for installation in UW 50 and UW 75 U-profiles
- Connection elbow can be installed without tools in various depth positions
- Soundproof connection elbow mounting
- Concealed cistern with front actuation, condensation-proof
- Immediate flushing possible with factory setting
- Installation and servicing work on concealed cistern without tools
- Water connection at rear or top centre
- Construction protection for service opening protects against moisture and dirt
- Construction protection for service opening can be cut to length
- Mounting plates left/right made of veneered wood, waterproof glued
- Suitable for Duravit Sensowash
- Equipped with empty pipe for water supply connection to Geberit AquaClean devices
- Prepared for installation of a 12 V power supply unit behind the toilet ceramic
- Suitable for all actuator plates in the Sigma series
- Suitable for insertion of cleaning cubes

## Scope of delivery

- Water connection R 1/2, with integrated angle valve and hand wheel
- Construction protection for service opening
- 2 protective plugs
- Connection set for WC, DN 90 mm
- Connection elbow made of PE-HD, DN 90 mm
- Transition sleeve made of PE-HD, DN 90/110 mm
- 2 threaded rods M12
- Power & Connect Box with intermediate base with connection terminal and construction protection
- Empty pipe length 0.32 m for connection to Geberit AquaClean
- Fastening material
- 4 wall brackets for pre-wall installation

Make: Burda

Type: BS+

Item no.: 211600.11PC