



PRODUCT RANGE 2026



03 – 18

## Santro

WC  
washstand  
AG

page 06-08  
page 09-10  
Seite 10

bidet  
urinal  
Intermediate support

page 11  
page 11-12  
page 13

Fitting plate page 14-16  
Accessories page 17-18



19 – 52

## BS+ Dry construction system



53 – 56

## Burda-Block combined wet and dry construction system



57 – 60

## my move elements Electrically height-adjustable



61 – 66

## Kombiset Wet construction system



67 – 80

## Flush buttons




81 – 96

## Flushing systems




Material requirement for the front wall installation of SANTRO

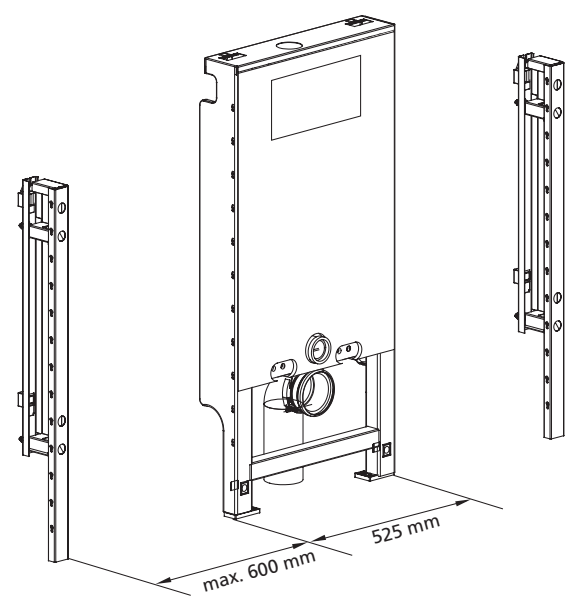

Number of modules	Front wall width upto 1080 mm	Front wall width upto 1600 mm	Front wall width upto 2200 mm	Front wall width upto 2800 mm	Front wall width upto 3400 mm
0	3 subcarrier 3 panels	4 subcarrier 4 panels	5 subcarrier 5 panels	6 subcarrier 6 panels	7 subcarrier 7 panels
1	2 subcarrier 1 panel	2 subcarrier 3 panels	3 subcarrier 3 panels	4 subcarrier 4 panels	5 subcarrier 5 panels
2		2 subcarrier 2 panels	2 subcarrier 3 panels	2 subcarrier 3 panels	4 subcarrier 4 panels




**Material requirement for the front wall installation of SANTRO**  
with nest element for pipelines, shower or bathtub

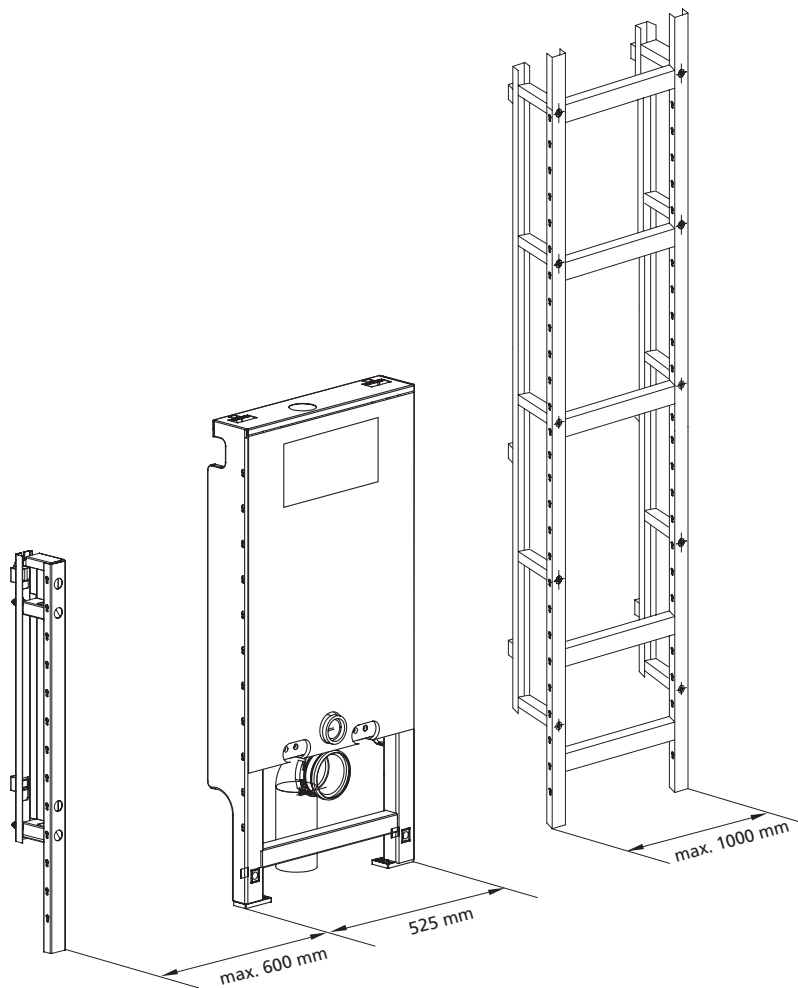

Number of modules	Front wall width 1200-2600 mm	Front wall width 2200-3600 mm
0	1 Nesting element 2 subcarrier 7 panels	1 Nesting element 3 subcarrier 8 panels
1		1 Nesting element 3 subcarrier 8 panels

## Santro Wall-WC module with concealed cistern

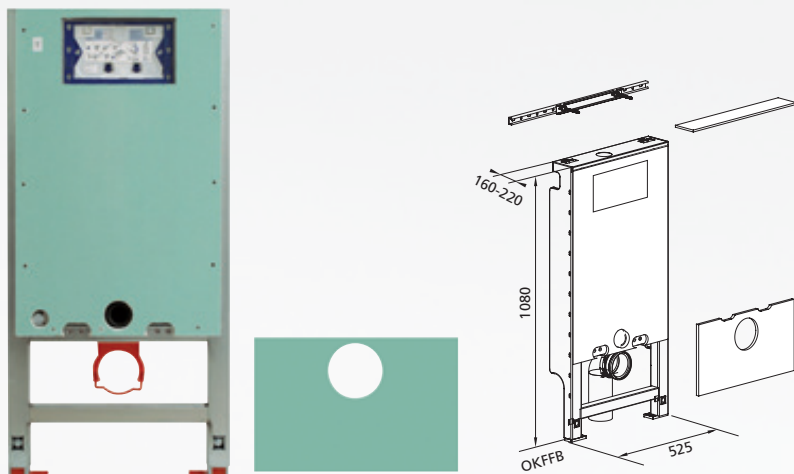

Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

Geberit cistern Sigma  
with 2-quantity flush

Installation height 1080 mm 611113.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1080 / 160-220 mm

### Accessories:

Flush plates from page 67


**Note:** WC power bearing for WC ceramics with contact surface smaller than 17 cm (e.g. Flaminia, Sentique), page 8

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:  
also compatible with Geberit Duo-Fresh  
inserts (cleaning cubes)



## Santro wall-hung WC module with concealed cistern (825 mm)

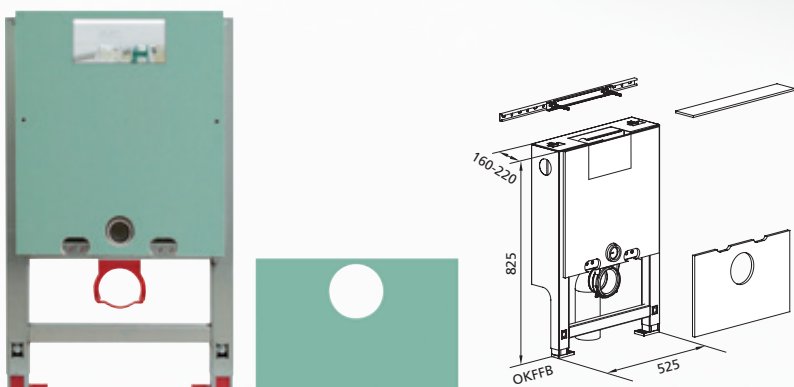

Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

Geberit cistern Omega  
with 2-quantity flush

Installation height 825 mm 611190.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front or top

Dimensions: W / H / D 525 / 825 / 160-220 mm

### Accessories:

Flush plates from page 67

**Note:**  
The toilet lid only remains in the open position if the distance between the wall and the wall to the toilet lid is > 25 mm.  
When using WC ceramics such as those from Keramag: Renova Nr. 1, Comprimo 204550, Joly 203060, V&B: Viala 765310, Viala 765210, the flush plate must be mounted from above.


**Note:**  
WC power bearing for WC ceramics with a support surface smaller than 17 cm (e.g. Flaminia, Sentique), page 8

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:  
also compatible with Geberit Duo-Fresh  
inserts (cleaning cubes)



## Santro WC complete kit with concealed cistern for guest WC single unit up to 1250 cm wide

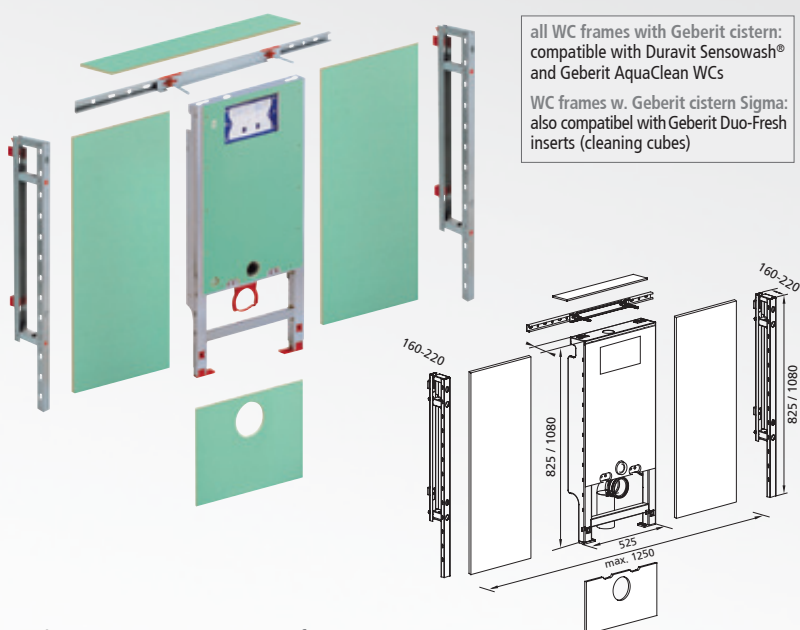

Design

Ref. no.

Geberit cistern Sigma  
with 2-quantity flush  
Actuation from the front

Installation height 1080 mm 611250.01

Geberit cistern Omega  
with 2-quantity flush  
Actuation from the front or top

Installation height 825 mm 611290.00

### Consisting of: 1 x WC element suitable for standard wall-hung WCs

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
- Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front or front/top

Dimensions: H / D 850 oder 1080 / 160-220 mm  
Suitable for single WC system (guest WC) max. width 1250 cm

### Accessory pack included (separate accessory pack):

#### 2 x subcarrier

For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules etc.

#### 2-tlg. GKF construction panel

450 mm wide, core-impregnated, fibre-reinforced plasterboard

### Accessories optional:


Flush plates from page 67

#### Note:

WC power bearing for WC ceramics  
with contact surface smaller than 17 cm  
(e.g. Flaminia, Sentique), page 8



## Santro WC module with concealed cistern for floor-standing WC

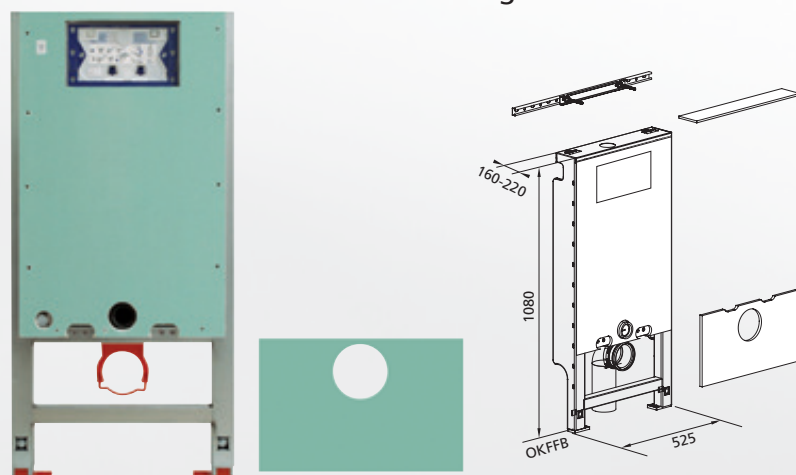

Design

Ref. no.

Geberit cistern Sigma  
with 2-quantity flush

Installation height 1080 mm 611236.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Connection elbow made of PE-HD, DN 90 mm
- Incl. transition sleeve made of PE-HD, DN 90/110 mm
- WC connection set, white with cover rosettes
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Maße: W / H / D 525 / 1080 / 160-220 mm

### Accessories:

Flush plates from page 67

#### Note:


WC power bearing for WC ceramics  
with contact surface smaller than 17 cm  
(e.g. Flaminia, Sentique), page 8

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:  
also compatibel with Geberit Duo-Fresh  
inserts (cleaning cubes)



## Santro WC module with concealed cistern for floor mounted children WC

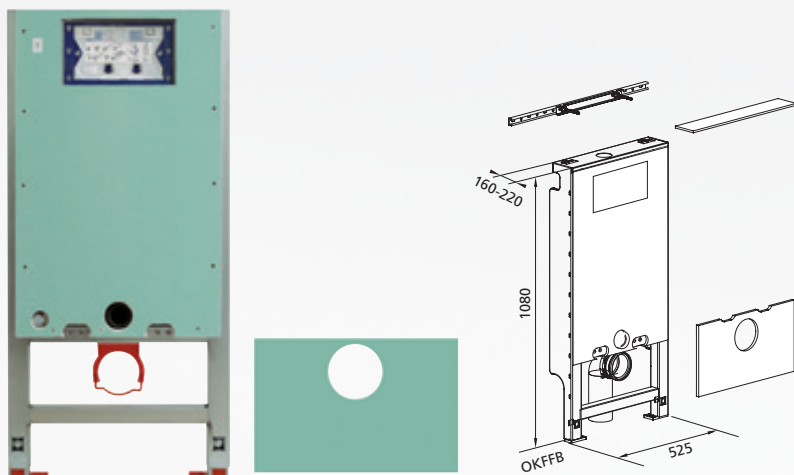

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Connection elbow made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- WC connection set, white with cover rosettes
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1080 / 160-220 mm  
WC installation at a height suitable for children

### Accessories:

Flush plates from page 67

### Note:

WC power bearing for WC ceramics with a support surface smaller than 17 cm (e.g. Flaminia, Sentique), page 8

Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

Geberit cistern Sigma  
with 2-quantity flush

Installation height 1080 mm 611335.01

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:  
also compatible with Geberit Duo-Fresh  
inserts (cleaning cubes)



## Santro / BS+ WC support brackets for WC ceramics with small contact surface




Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

1 pair 216400

For additional support  
of WC ceramics  
Support surfaces smaller than 17 cm  
(e.g. Flaminia, Sentique)



## Santro attachment set for support and folding support rails

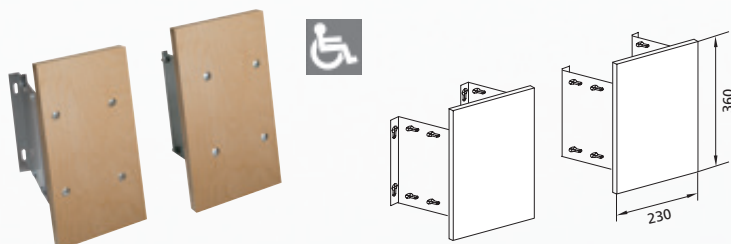

Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

1 pair  
with 2 wall mountings


697155

- Galvanised, torsion-resistant sheet metal construction
- Mounting plate for variable arm lever mounting  
made of laminated wood
- all fastening and mounting accessories.

Suitable for modules  
in barrier-free design



## Santro washstand module for floor-standing fitting

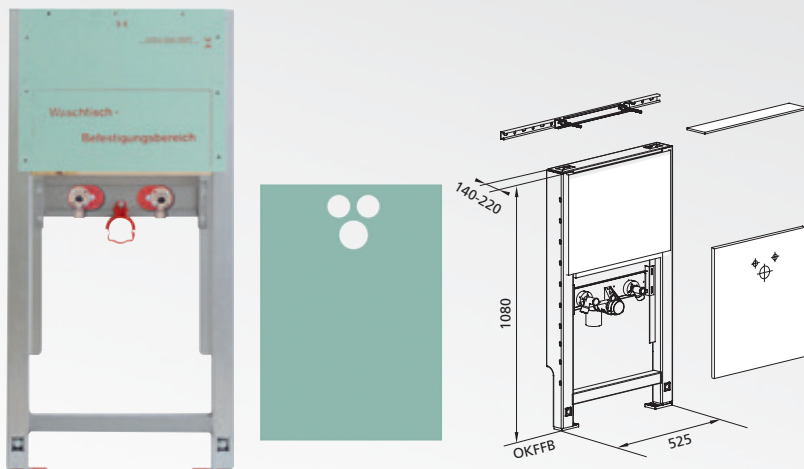


- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1080 / 140-220 mm

Design	Ref. no.	Design	Ref. no.
for floor-standing fitting		with built-in tap plate for Connection of an water heater	
Installation height 1080 mm	621258.00	Installation height 1080 mm	622026.00



## Santro children washstand module for floor-standing fitting

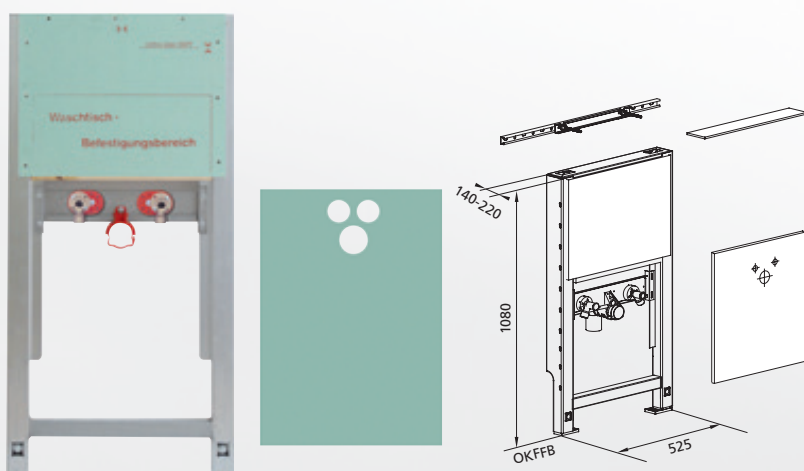



- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1080 / 140-220 mm

Design	Ref. no.
Installation height 1080 mm	621012.00



## Santro washstand module for furniture washstand for floor-standing fitting

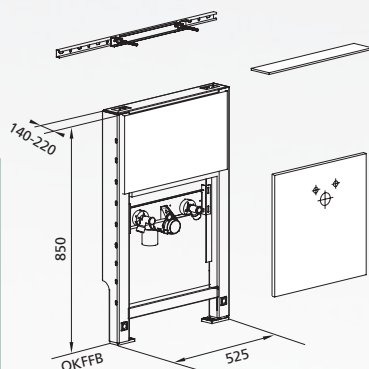

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 850 / 140-220 mm



Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

for floor-standing fitting

Installation height 850 mm 621050.00



## Santro sink module for wall fitting

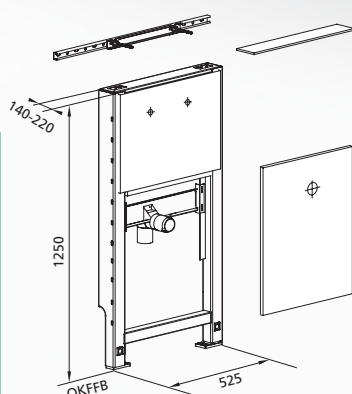

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1250 / 140-220 mm


Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

Installation height 1250 mm 621449.00





## Santro bidet module for floor-standing fitting

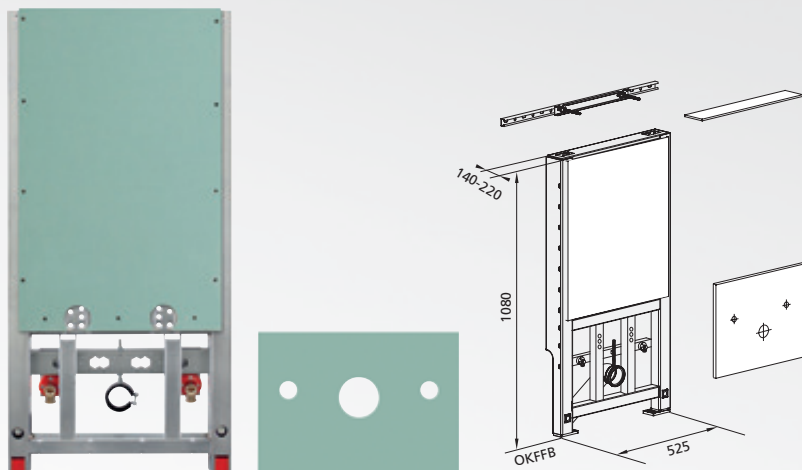

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Variable bidet ceramic fixtures
- Swivelling, depth-adjustable DN 50 urinal trap
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs

Dimensions: W / H / D 525 / 1080 / 140-220 mm


Design Ref. no.

for floor-standing fitting

Installation height 1080 mm 631578.00



## Santro urinal module with surface-mounted/concealed flush valve or shell set

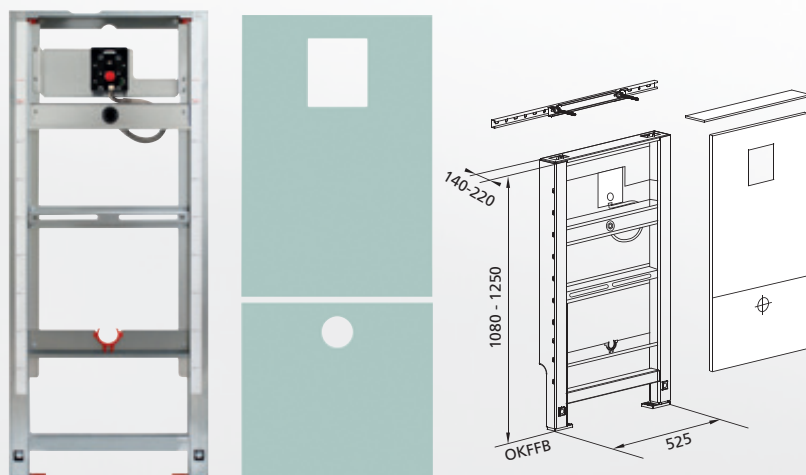

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Adjustable urinal mounting crossbar
- Adjustable sound-decoupled water inlet crossbar
- Adjustable drain support bar
- swivelling drain elbow DN 50
- Pre-assembled flush-mounted flush valve or pipework set
- Construction protection for inspection opening
- All fixing and installation accessories
- Adjustable foot supports 0-220 mm
- 1/2" connection bracket
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1080 oder 1250 / 140-220 mm  
Suitable for standard urinals

### Attention:

If you are using a urinal cover, please contact our hotline  
contact our hotline 0211/95001-0 beforehand!

Design Ref. no.

As an empty element

Installation height 1080 mm 647600

Installation height 1250 mm 647620


Design Ref. no.

Burda flush valve U-05/06

Installation height 1250 mm 641694



## Santro urinal module with shell set for Flowtronik

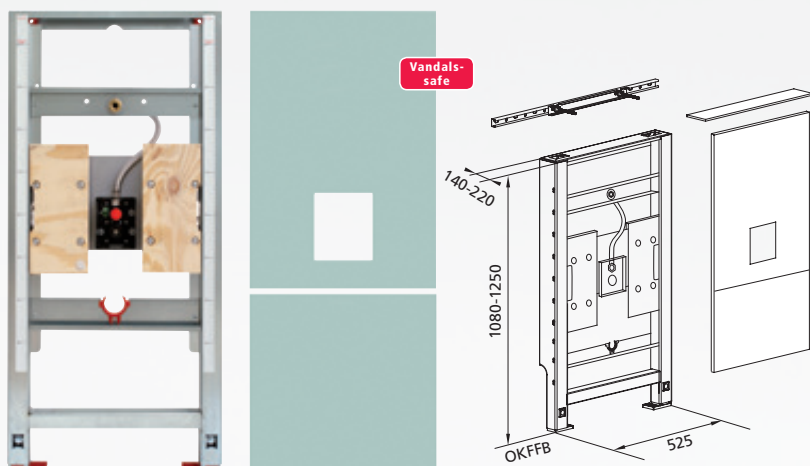

- Galvanised, self-supporting and sound-decoupled steel construction
- Pre-assembled flush-mounted urinal pipework set with 230 V connection, Valve block with water shut-off
- Functions: Standard and stadium mode, forced flushing
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Urinal mounting plate
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Swivelling drain elbow DN 50
- Construction protection for inspection opening
- All fixing and installation accessories
- Adjustable foot supports 0-220 mm
- 1/2" connection bracket
- Flexible hose
- Inlet connector
- Urinal connection set

Dimensions: W / H / D 525 / 1080-1250 / 140-220 mm  
Suitable for standard urinals


### Note:

Not suitable for urinals with moulded-in urinal trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.



Design	Ref. no.
Installation height 1080 mm	646000
Installation height 1250 mm	646001

## Santro urinal module with wall-mounted/flush-mounted flush valve or shell set

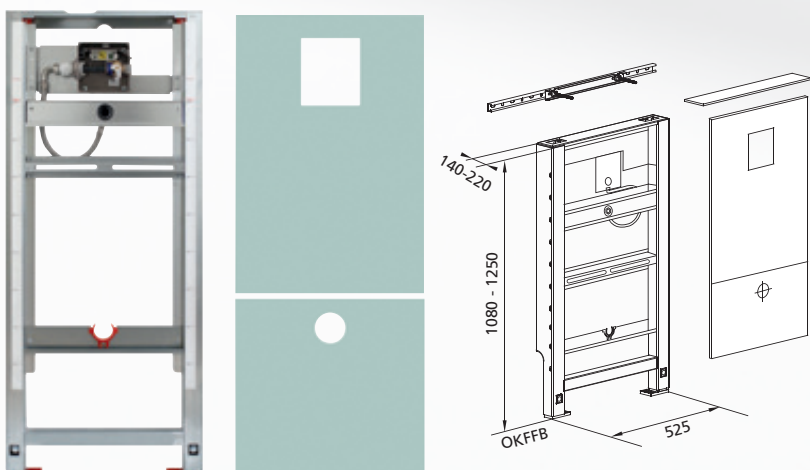

- Galvanised, self-supporting and sound-decoupled steel construction
- Pre-assembled flush-mounted urinal electronics or body kit
- Single-layer (12.5 mm) GKF construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Adjustable urinal fixing crossbar
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain traverse
- Swivelling drain elbow DN 50
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Flexible hose
- Inlet connector
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1080 oder 1250 / 140-220 mm  
Suitable for standard urinals

### Note:

Not suitable for urinals with moulded-in urinal trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.


Design	Ref. no.
with Geberit universal shell set for Hy-Tronic and Hy-Touch	
Installation height 1250 mm	647572

Design	Ref. no.
for Geberit Flushcontrol	
Installation height 1080 mm	641714
Installation height 1250 mm	641713
for Duravit Utronic	
Installation height 1080 mm	641724
Installation height 1250 mm	641723





## Santro subcarrier for shelf depth 190-220 mm

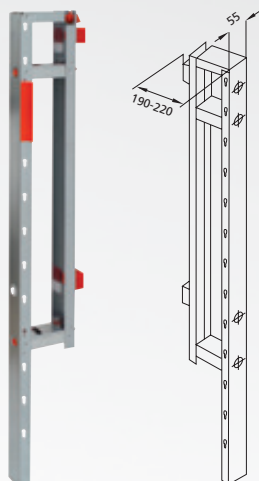


Design	Ref. no.	Design	Ref. no.
<b>Type 108</b> Installation height 1080 mm Installation depth 190-220 mm	667409	<b>Type 125</b> Installation height 1250 mm Installation depth 190-220 mm	667423
<b>Type 85</b> Installation height 850 mm Installation depth 190-220 mm	667416	<b>Type 60</b> Installation height 600 mm Installation depth 190-220 mm	667520

For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules, etc.  
Also suitable for fitting plates, Frame for installation rail (using spacer rails 677 034), adjustable in depth, can be used both left and right usable

- Galvanised, sound-decoupled steel construction
- All fixing and installation accessories



## Santro subcarrier for shelf depth 135-160 mm

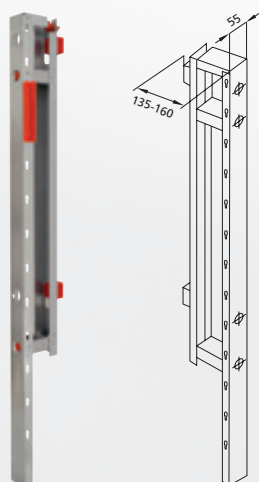


Design	Ref. no.	Design	Ref. no.
<b>Type 108 S</b> Installation height 1080 mm	667430	<b>Type 125</b> Installation height 1250 mm	667454
<b>Type 85</b> Installation height 850 mm	667447		

For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules, etc.  
Also suitable for fitting plates, Frame for installation rail (using spacer rails 677 034),  
Adjustable in depth, can be used both left and right

- Galvanised, sound-decoupled steel construction
- All fixing and installation accessories



### Santro shaft element

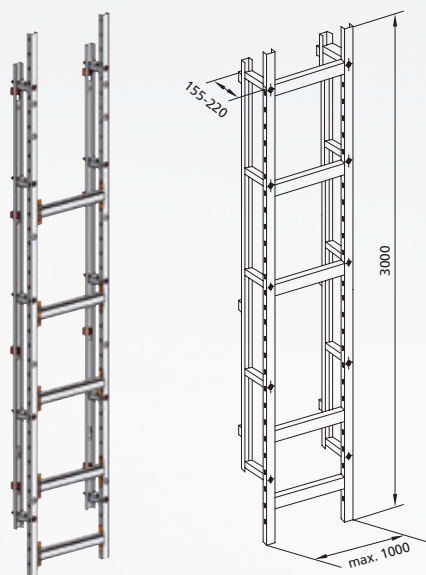


Design	Ref. no.
<b>Type 190</b> 1000 / 3000 / 155-220 mm	677057
<b>Type 135</b> for reduced installation depth 1000 / 3000 / 135-160 mm	677040

For cladding shafts and pipe runs as well as for mounting fitting plates  
(using spacer rails 677 034 or 677 033, page 14)  
For bath and shower mixers or mirror cabinets etc.

- Galvanised, sound-insulated steel construction, consisting of 2 side panels
- 2 spacer rails of 3 metres each for fanning out
- All fixing and mounting accessories



### Santro spacer rail




Design	Ref. no.
<b>Länge 1080 mm</b>	677034
<b>Länge 3000 mm</b>	677033

For installation in shaft elements (Type 190, 135, 190 E, 135 E) and between intermediate supports (all types)  
For stabilisation and / or for holding fitting plates,  
Frame for installation rail

- Galvanised sheet metal



### Santro fitting plate C1 for standard concealed taps

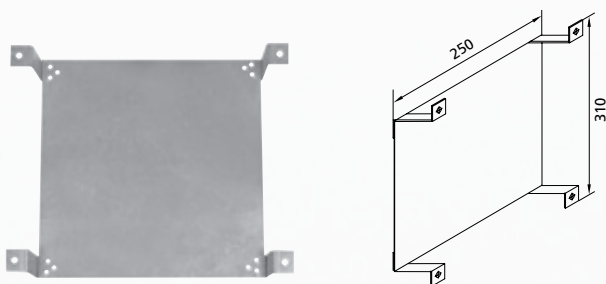


Design	Ref. no.
	680736

For installation in shaft elements (Type 190, 135, 190 E, 135 E) and between intermediate supports (all types)  
For stabilisation and / or for holding fitting plates,  
Frame for installation rail

- Galvanised steel construction
- 4 sound-insulated pipe clamps
- All fixing and mounting accessories



## Santro fitting plate A for surface-mounted fittings

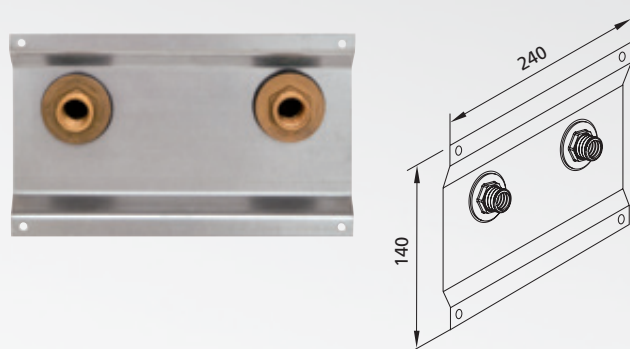

Design

Ref. no.


681658.00

**For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.**

- Galvanised steel construction
- 2 wall bushings 1/2"
- complete mounting and assembly accessories



## Santro fitting plate B for shower connection or single tap system

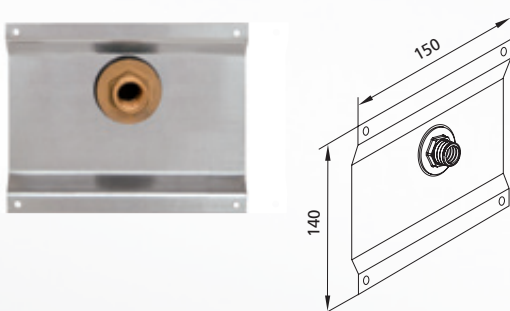

Design

Ref. no.


681689.00

**For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.**

- Galvanised steel construction
- 2 wall bushings 1/2"
- complete mounting and assembly accessories



## Santro fitting plate D for hydraulically controlled instantaneous water heaters

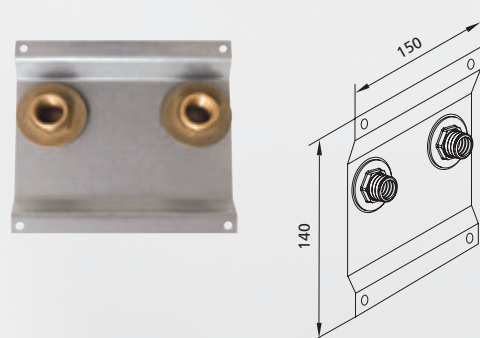

Design

Ref. no.

only 1/2' available

681740.00


**For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.**

- Galvanised steel construction
- 2 wall bushings 1/2"
- complete mounting and assembly accessories



# Santro Fitting plates and accessories

## Santro fitting plate E1 for washing machine waste water outlet

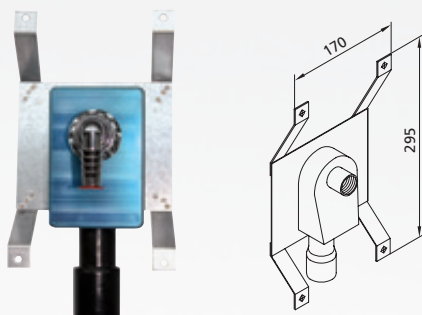

Design

Ref. no.


681764

**For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.**

- Galvanised steel construction
- Concealed odour trap
- complete mounting and assembly accessories



## Santro fitting plate E2 for washing machine inlet and outlet

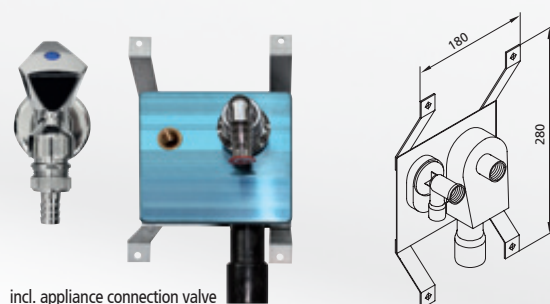

incl. appliance connection valve

Design

Ref. no.


681771

**For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.**

- Galvanised steel construction
- 1 wall disc 1/2"
- Concealed odour trap
- complete mounting and assembly accessories



## Santro fitting plate E3 for washing machine inlet and outlet

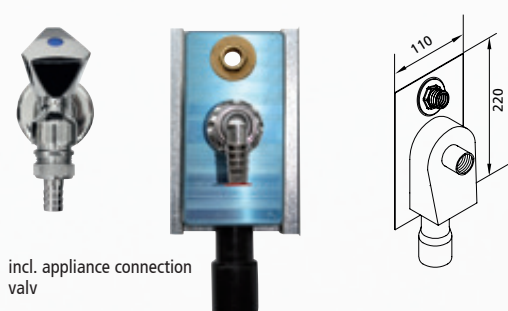

incl. appliance connection valve

Design

Ref. no.

683607


**For lateral installation in a subcarrier or lateral installation in a shaft element Type 190**

**For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.**

- Galvanised steel construction
- 1 wall disc 1/2"
- Concealed odour trap
- complete mounting and assembly accessories



## Santro triangular profile



Design

Ref. no.

679150

For over-corner mounting of modules galvanised



## Santro GKFI building board



Design

Ref. no.

W x H x D

624 x 1075 x 12,5 mm

697024

598 x 1300 x 12,5 mm

697000

Core-impregnated, fibre-reinforced plasterboard



## Santro installation frame for instantaneous water heaters



Design

Ref. no.

with frame 30 cm

400135

### Santro mounting frame

- Galvanised, self-supporting and sound-decoupled steel construction
- Installation frame, incl. building protection
- 2 wall ducts 1/2"
- without cabinet element



Santro construction screws



100 pieces in a box.

For GKFI building boards, self-drilling

Design	Ref. no.
<b>for single-layer panelling</b> 3,5 x 25 mm	697338
<b>for double panelling</b> 3,5 x 35 mm	697345



Santro construction screws



100 pieces in a box.

Self-drilling, for shaft elements,  
intermediate beams, etc.

Design	Ref. no.
<b>4,8 x 16 mm</b>	697536
<b>4,8 x 19 mm</b>	697537



Santro wall mounting rail



For continuous mounting of modules etc.

Design	Ref. no.
<b>1080 mm</b>	697048



03 – 18

**Santro** Pre-planked prewall system



19 – 52

**BS+**

WC page 24-30  
WT page 31-39  
Sink page 40

Bidet  
Urinal  
Shower/Bathtub

page 40  
page 41-42  
page 43-44

Built-in furniture  
Fastening element  
Element for fittings

page 45  
page 46  
page 46

Traverses page 47-49  
Accessories page 50-52



53 – 56

**Burda-Block** combined wet and dry construction system



57 – 60

**my move elements** Electrically height-adjustable



61 – 66

**Kombiset** Wet construction system



67 – 80

**Flush buttons**



81 – 96

**Flushing systems**



## Description of system

### 1.1 BS+

The BS+ installation range is the universally applicable, industrially pre-assembled element system for stud wall and front wall installation.

#### 1.1.1 Elements


This extensive range includes elements for toilets but also for urinals, bidets and wash-stands, as well as the corresponding elements for barrier-free construction. Ready-made elements are even available for special applications such as countertop washbasins with wall fittings, water metres or urinal electronics.

#### 1.1.2 Free choice of connections


With all units the fitter is free to choose between cisterns from various brand manufacturers and decide for himself what type of pre-fitted connection should be supplied with the element.

### 1.2 Application area


The BS+ is the flexible dry construction installation system for front wall installation or for fitting into a stud wall.

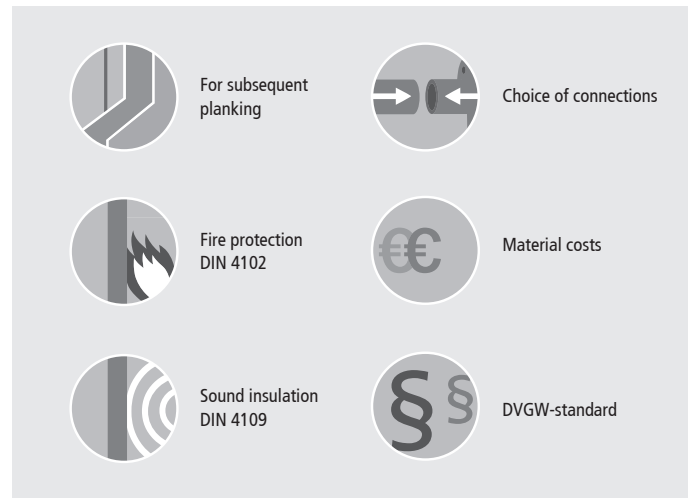


The application areas for this system are therefore building sites where drywallers are also expected to be included in handling the job.

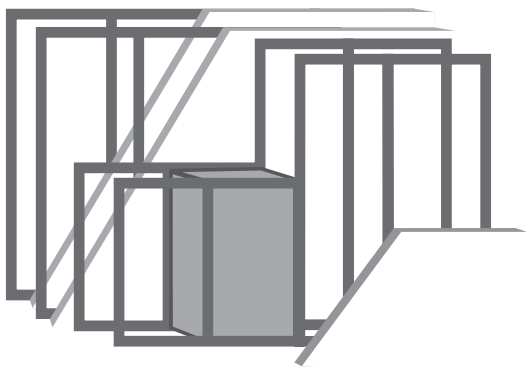

In front of stud wall

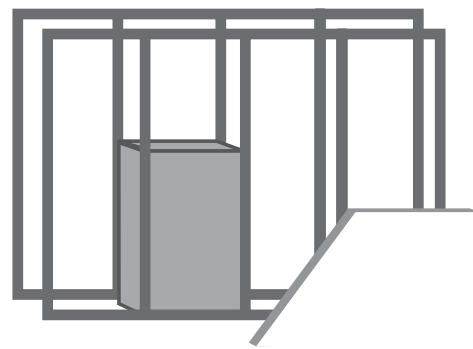

In stud wall

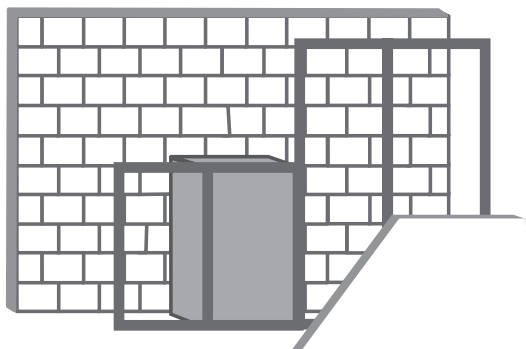


In front of solid wall



### 1.3 Benefits

The BS+ installation range offers fitters and planners the opportunity to create complete installations in classic dry constructions and to resort to pre-assembled units. Individual solutions can be flexibly planned in this way.

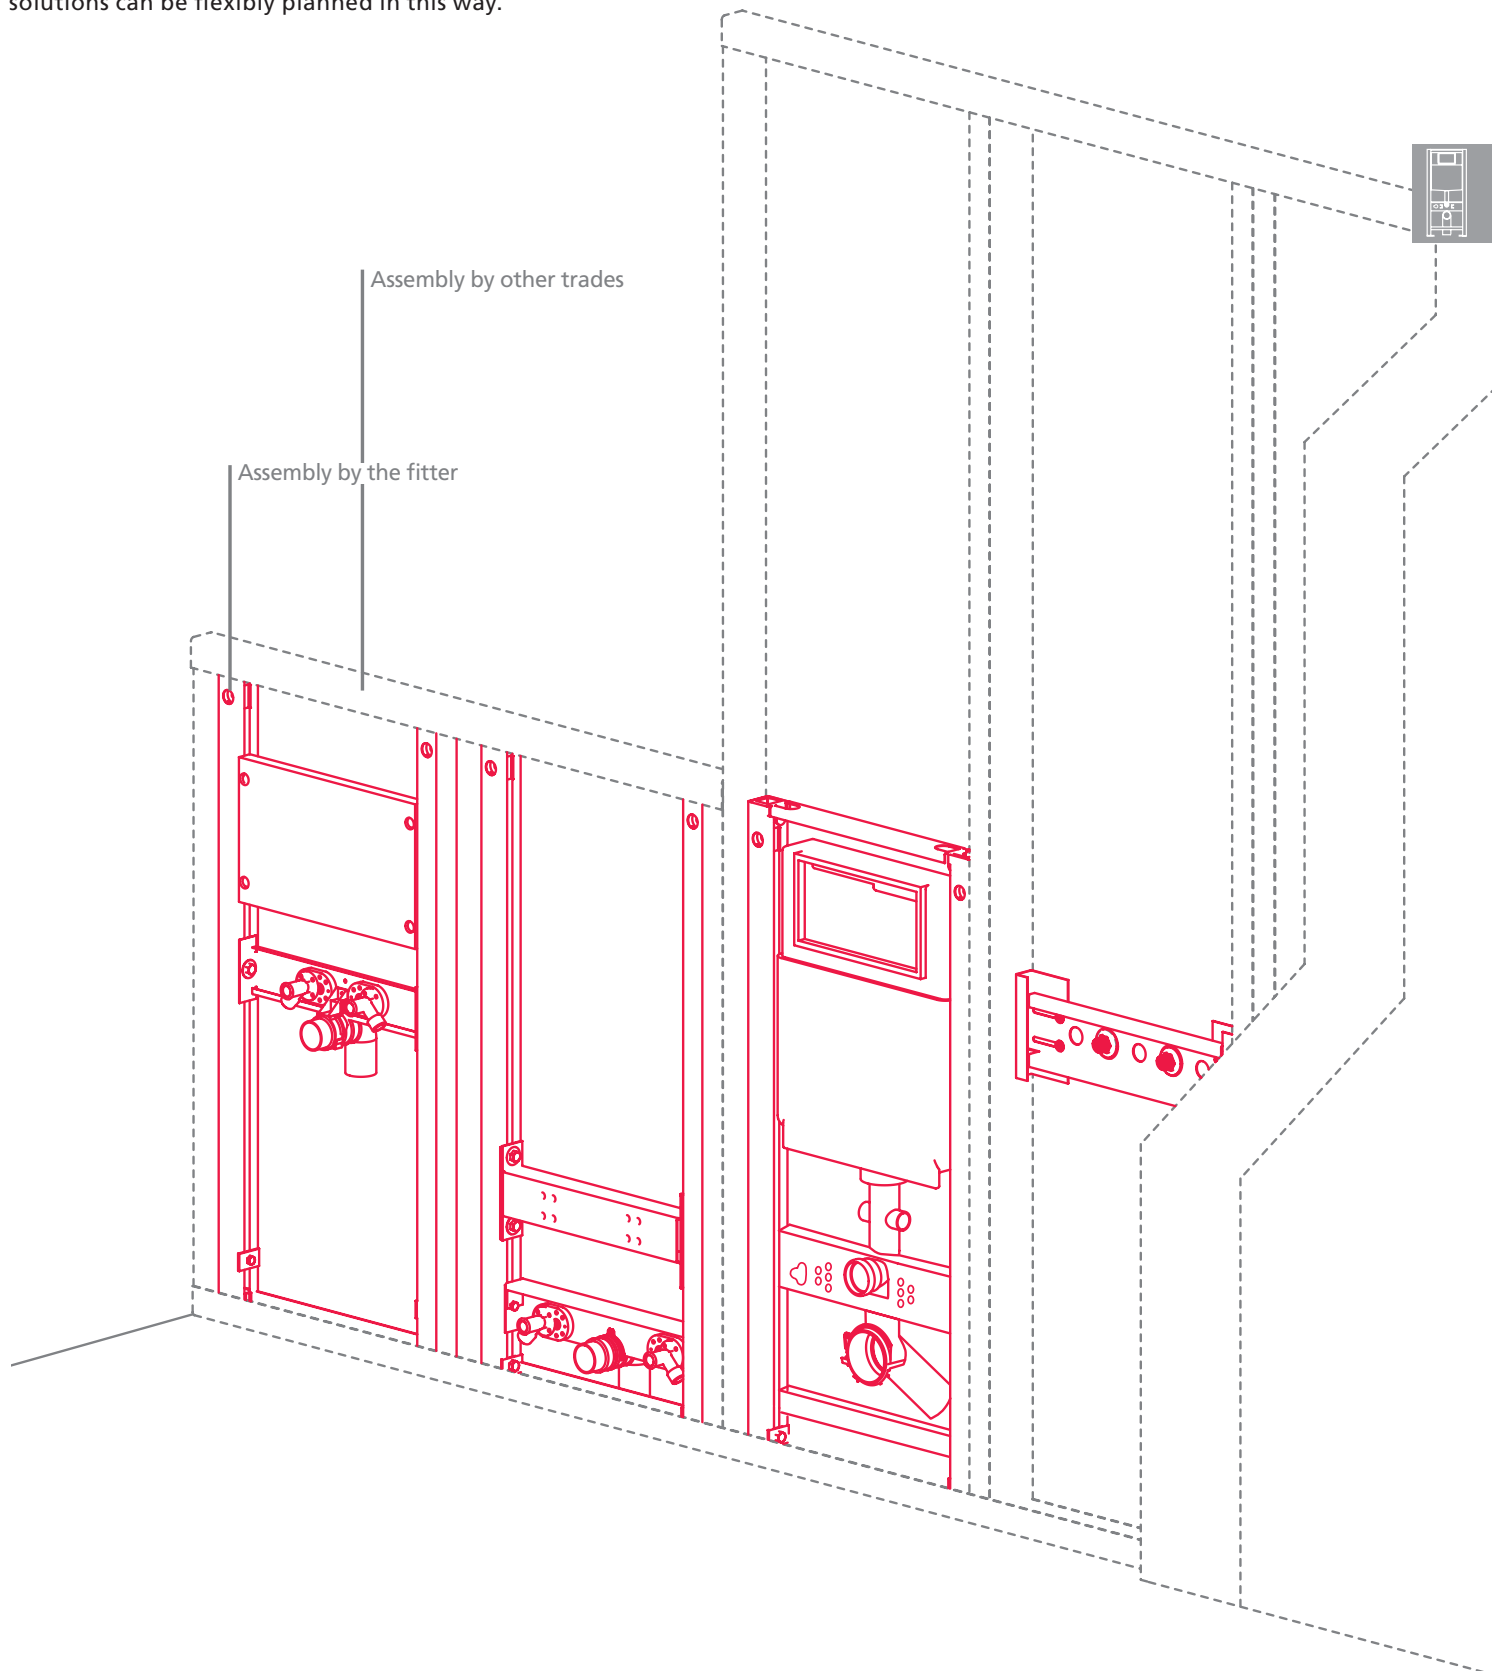

## Assembly instructions for fitting in stud walls

### 1.1 Perfect and installation-friendly

For new builds, renovations, loft conversions and the commercial sector: Light construction wall with integrated fastening and connection options for sanitary units are in line with modern building technology.

The BS+ system from Burda gives you a fully galvanised, self-supporting design for fitting sanitary units into light construction walls. This is an installation-friendly system for fitting individually into the C-profiles of a stud wall.


### 1.2 Design of the light constructions walls

The BS+ elements from Burda are designed to be fitted in stud walls according to DIN 18183, November 1988 edition, walls made out of plasterboard panels (design of metal stud walls) or wooden stud walls, with a load bearing capacity in accordance with DIN 18183. In so-called wet rooms with metal stud wall and BS+ Plus sanitary units planking should be done with double-layer, impregnated firecheck plasterboard panels.



When fitting WC installations suitable for old and disabled people, reinforced UA profiles must always be used!

Installation example:




metre mark to the standing C-profiles.



Inserting the element into the stud wall.



Metre mark on the stud wall align with the marking on the panel. (B)




Height adjustment of the element is done by adjusting the feet of the element. (A)

- Loosen nut
- Move foot to required size
- Tighten nut




Align the outer edges of the element flush with the outer edges of the stud wall and fix the position. (C)



Screw the aligned stud wall panel combination to the side and to the floor.

**Note:** The panelling must always be fully seated and screwed down without any gaps.

## Installation instructions for installation in a pre-wall installation

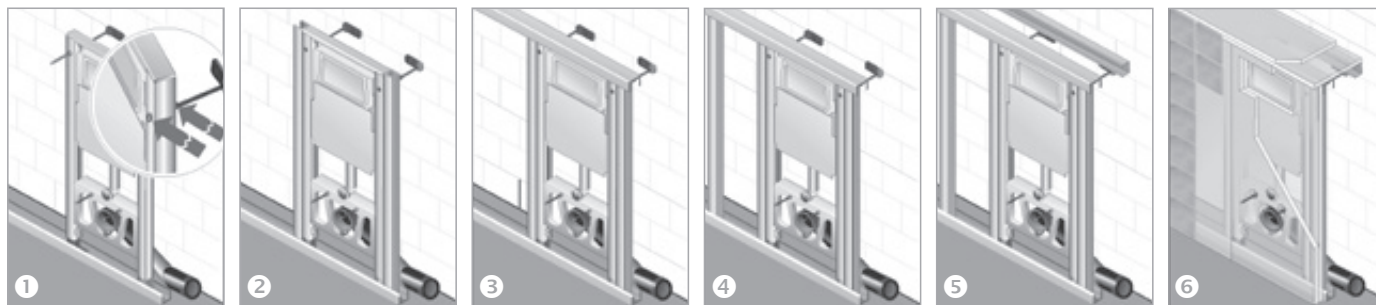

① Fasten the U-profile to the floor at the required distance to the wall and place the BS+ element into it. Install the two wall brackets supplied as accessories to the BS+ element and adjust the gap between the element and the wall with the aid of the wall brackets. Make the wall brackets face downwards or to the side. Cut the threaded rods off so that they no longer protrude from the element. Tighten the lock nuts.

② On the left and right of the element, use the self-tapping screws to fasten a C-profile on each side, which are additionally joined to the U-profile with pop rivets at the bottom.

**Note:** As a matter of principle, all C and U-profiles are joined with pop rivets or profile connecting pliers.

③ Put another U-profile over the element in the required length, which will act as a shelving area.




④ Fan out the levels in which the panels are located. Every 625 mm, a C-profile must be fanned out or a new panel placed.

⑤ Now attach another U-profile (back to the wall) at the same height as the top edge of the element.



⑥ Plank this construction with plasterboard suitable for damp rooms. The panelling must always be double with no gaps! Additional screws must be used in the WC area!

## Can be installed in a stud wall or as a single element using wall brackets for pre-wall installation

- The elements consist of 48 mm wide profiles, so they can be perfectly installed in a 50 plasterboard stud wall.
- GKFI building boards can be installed be placed butt to butt
- Fastening the building boards without pre-drilling
- Sound decoupling integrated as standard (all red plastic parts)
- Element feet as standard 220 mm extendable
- High corrosion protection due to sendzimir galvanised elements
- 4-point fastening
- All current standards are complied with (e.g. DIN 4109 etc.)

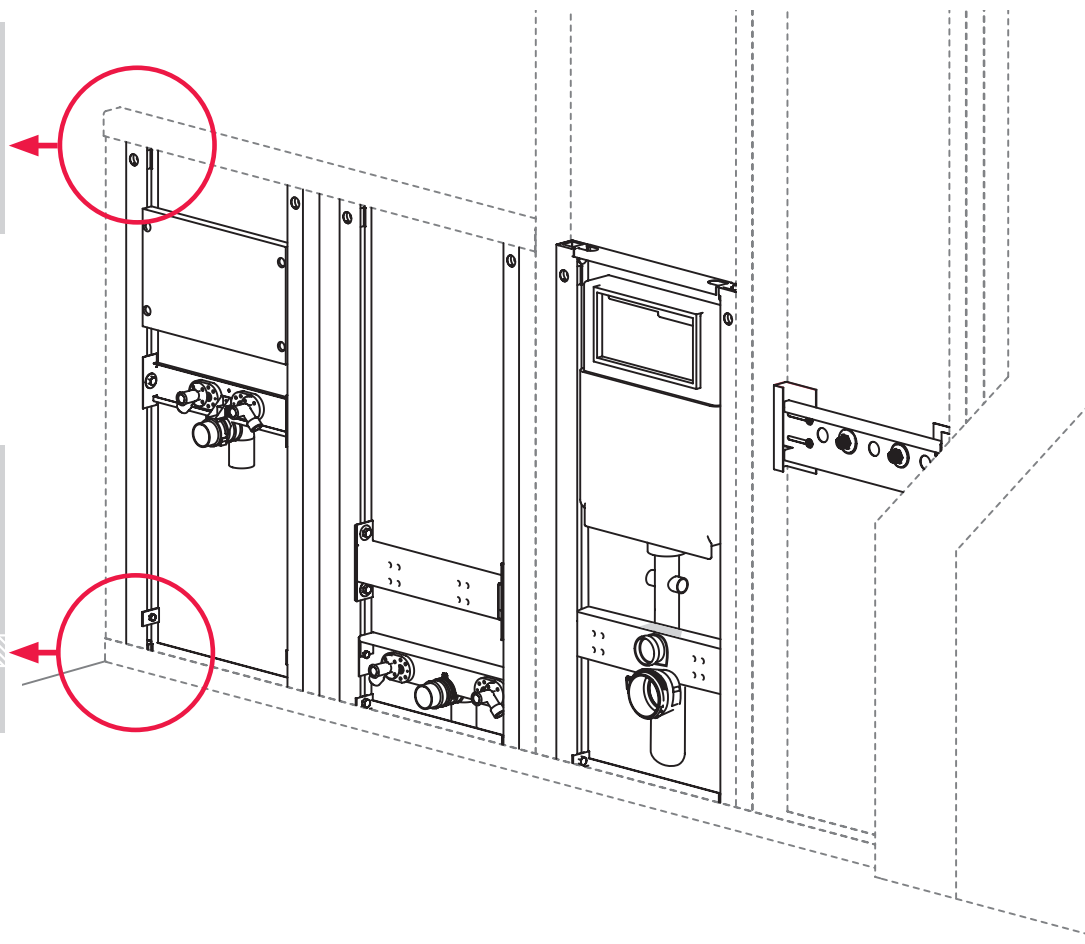

BS+ wall-hung WC element with concealed cistern Height 1120 mm

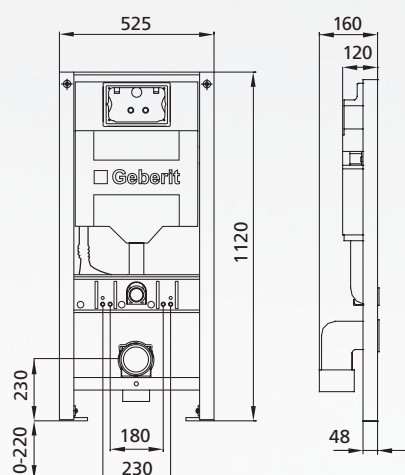

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99)  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories:**

Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67

**Note:**

**Note:** WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50


Design	Ref. no.	Design	Ref. no.
<b>Installation height 1120 mm</b>		Geberit cistern Delta with 2-quantity flush	211109.99
Geberit UP-SPK Sigma with 2-quantity flush	211088.01	incl. sound-decoupled wall brackets for pre-wall mounting	
Geberit UP-SPK Sigma with 2-quantity flush with Power & Connect Box	211088.01PC	Burda K770 with 2-quantity flush	211140.00

Can also be used as a barrier-free WC element.

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



BS+ floor-standing WC element with Geberit cistern Sigma oder Burda cistern K770 for adults

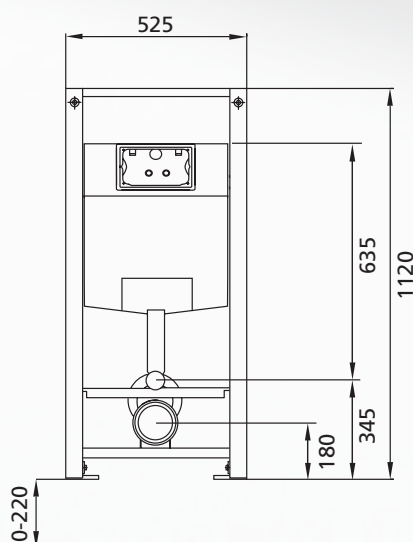

Adult stand-up WC

Traverse inlet  
(dimension centre inlet height: 345 mm)  
Traverse drain  
(dimension centre drain height: 180 mm)

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Free-standing WC connection set white with cover rosette
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual-flush technology or  
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for adult floor-standing WCs.

**Accessories:**

Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67.

Design	Ref. no.
--------	----------


**Adult floor-standing WC**  
Installation height 1120 mm

Geberit concealed cistern Sigma 211948.01  
with dual flush

Burda concealed cistern K770 with dual flush	211943.00
---	-----------



## BS+ wall-mounted WC element for odour extraction exhaust air

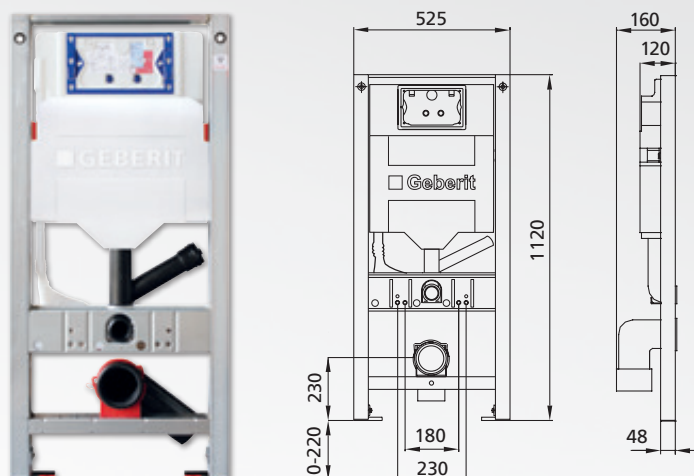

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99)  
and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67

### Note:

WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50

### Can also be used as a barrier-free WC element.


Design	Ref. no.	Design	Ref. no.
Installation height 1120 mm		Burda cistern K770 with 2-quantity flush for odour extraction Exhaust air 50 mm prepared	220140.00
Geberit cistern Sigma with 2-quantity flush for odour extraction Exhaust air 50 mm prepared	220088.01		

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ wall-hung WC element Height 825 und 980 mm

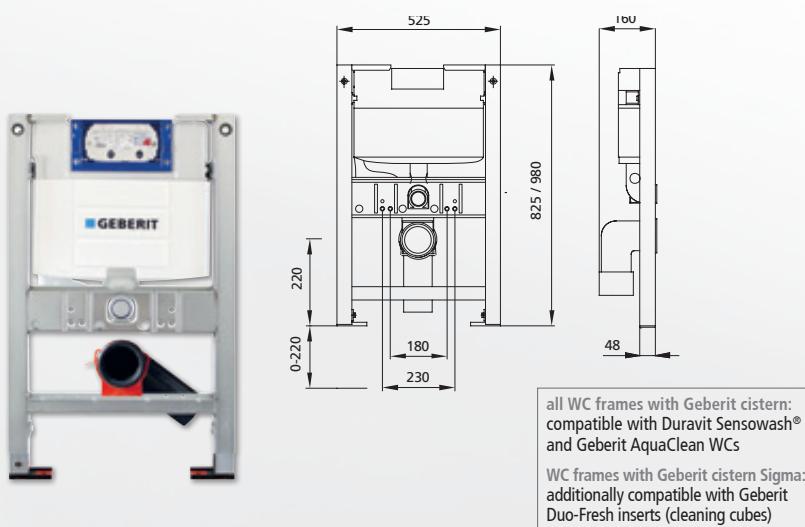

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211 009.99)  
and integrated or separate angle valve
- Actuation from the front or top

Dimensions: W / H / D 525 / 825 oder 980 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67

### Note:

The toilet lid only remains in the open position if the distance between the wall and the wall to the toilet lid is > 25 mm.

When using WC ceramics such as those from Geberit/Keramag: Renova No. 1, Comprimo 204550, Joly 203060 V&B: Viala 765310, Viala 765210, the flush plate must be installed from above.

### Note:


WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50

### Can also be used as a barrier-free WC element.

Design	Ref. no.	Design	Ref. no.
Installation height 825 mm		Installation height 980 mm	
Geberit cistern Omega Actuation from above/front with 2-quantity flush	211390.00	Geberit cistern Omega Actuation from above/front with 2-quantity flush	211395.00



BS+ double WC element for wall-hung WC

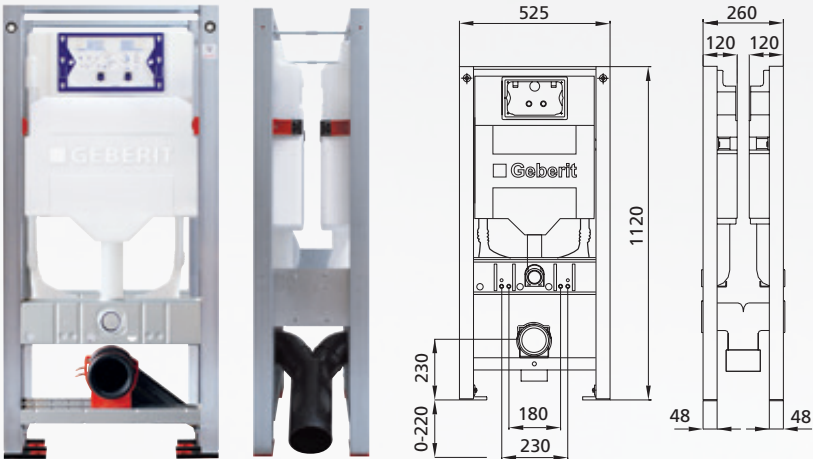

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- HDPE breeches branch DN 80 / 100 / 80
- 2x wall-mounted WC connection fittings
- 2x built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- 2x cistern connection bracket with integrated or separate angle valves
- Actuation from the front

Dimensions: W / H / D 525 / 1120 / 260 mm  
Suitable for standard wall-hung WCs.

**Accessories:**  
Flush plates and flushing systems from page 67

**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm  
(e.g. Flaminia, Sentique), page 50

Can also be used as a barrier-free WC element.

Design \_\_\_\_\_ Ref. no. \_\_\_\_\_

Installation height 1120 mm


Geberit cistern Sigma with 2-quantity flush	211122.01
Geberit cistern Delta with 2-quantity flush	211222.99
Burda cistern K770 with 2-quantity flush	211240.00

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs  
  
WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)





## BS+ WWC element with Geberit Sigma concealed cistern or Burda concealed cistern K770 for children

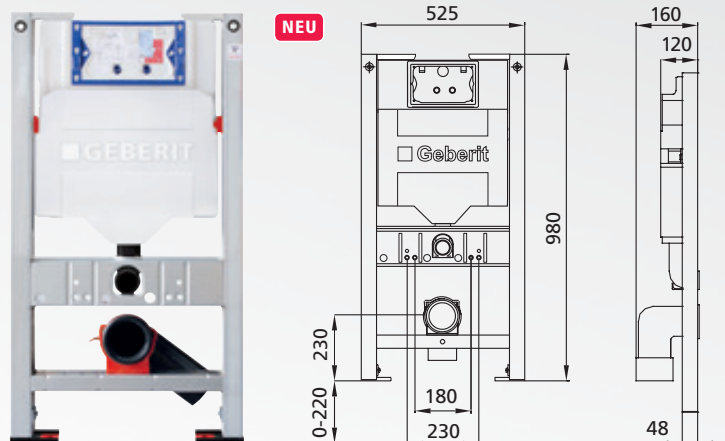

Children's wall-hung WC

Design Ref. no.

### Children's wall-hung WC Installation height 980 mm

Geberit concealed cistern Sigma with 2-quantity flush 211084.01

Burda concealed cistern K770 with 2-quantity flush 211151.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection elbow made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual flush technology or  
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Construction protection for inspection opening
- Building plugs for inlet and outlet pipe
- All fixing and installation accessories
- Adjustable foot supports up to max. 0-220 mm
- Cistern connection bracket and integrated or separate angle valve
- Operation from the front

Dimensions: W / H / D 525 / 980 / 160 mm (with drain)  
Suitable for toddler/child wall-hung WC.


#### Accessories:

Sound-decoupled wall bracket for pre-wall installation, page 52  
Flush plates and flushing systems from page 67



## BS+ floor-standing WC element with Geberit cistern Sigma oder Burda cistern K770 for toddlers/children

One element for  
2 WC ceramics

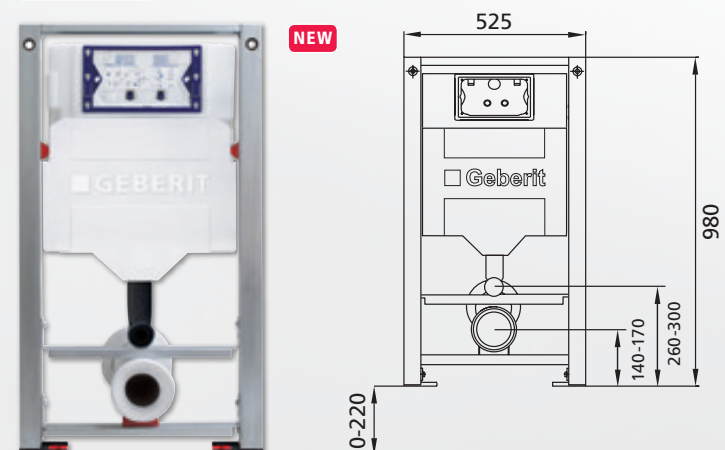

Toddlers/children Floor standing-WC

Traverse inlet  
(dimension centre inlet height: 260 mm)  
Traverse drain  
(dimension centre drain height: 140 mm)

Traverse preset for toddler

- Galvanised, self-supporting and sound-decoupled steel construction
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Free-standing WC connection set white with cover rosette
- Built-in, condensation-insulated Geberit Sigma concealed cistern with dual-flush technology or  
built-in, condensation-insulated Burda concealed cistern K770 with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket and integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 980 / 160 mm (with waste pipe)  
Suitable for Toddlers/children Floor standing-WC

#### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67.

Design Ref. no.


### Toddlers/children Floor standing-WC Installation height 980 mm

Geberit concealed cistern Sigma with dual flush 211947.01

Burda concealed cistern K770 with dual flush 211944.00



BS+ WC element for WWC, 112cm with Schell concealed WC flush valve Compact II

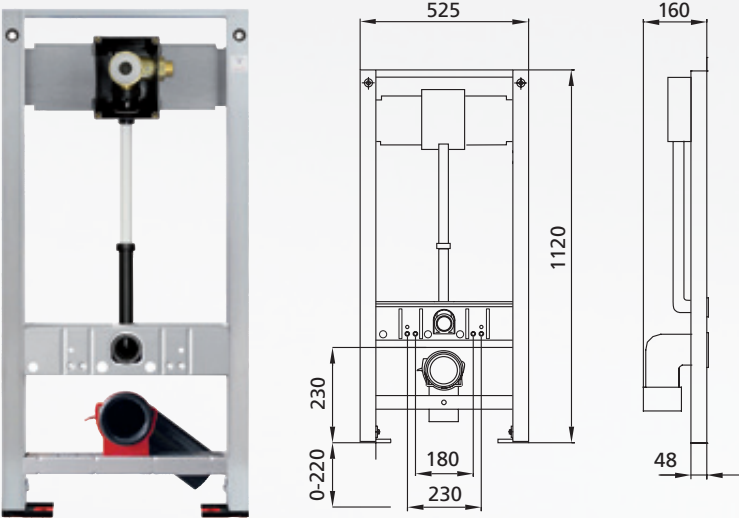

Design	Ref. no.
Schell concealed WC flush valve Compact II	211246

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in WC concealed flush valve set Schell WC flush valve Compact II
- Pre-assembled water section made of Dr brass
- Pre-shut-off / connection G3 / 4 AG, right
- Flushing plug G3/4 AG
- Plaster cover


Dimensions: W / H / D 525 / 1120 / 160 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67

**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50



BS+ wall-mounted WC element for barrier-free WC facilities

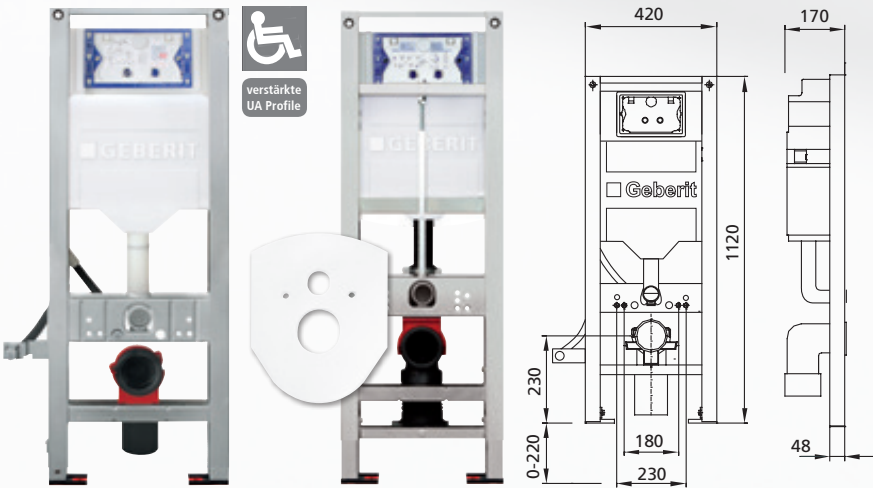

Design	Ref. no.	Design	Ref. no.
<b>barrier-free Installation height 1120 mm</b>			
Geberit cistern Sigma with 2-quantity flush	211148.01	Geberit cistern Sigma with 2-quantity flush Odour extraction exhaust air 50 mm prepared	220099.01
Burda cistern K770 with 2-quantity flush	211150.00	Geberit cistern Sigma with 2-quantity flush with cover plate (white) 8 cm height adjustable after tiling	211090.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced element width 420 mm
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 420 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67


**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs  
  
WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)





## BS+ wall-mounted WC element for barrier-free WC facilities incl. mounting plates for folding support handles right + left

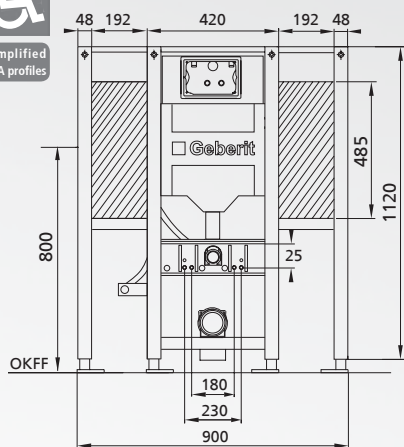

**Optional accessories:**  
Power & Connect Box

Design Ref. no.

### barrier-free Installation height 1120 mm

Geberit cistern Sigma  
with 2-quantity flush  
Width 900 mm 211600.11

Burda cistern K770  
with 2-quantity flush 211700.10

Geberit UP-SPK Sigma  
with 2-quantity flush and  
Power & Connect Box  
Width 900 mm 211600.11PC

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Mounting plate right and left
- Actuation from the front

Dimensions: W / H / D 880 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories included:**  
4 Sound-decoupled wall brackets for pre-wall mounting

**Accessories optional:**  
Flush plates and flushing systems from page 67



**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ wall-mounted WC element for barrier-free WC facilities incl. mounting plates for hinged support handles, optionally right / left

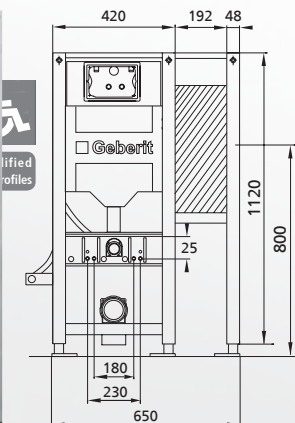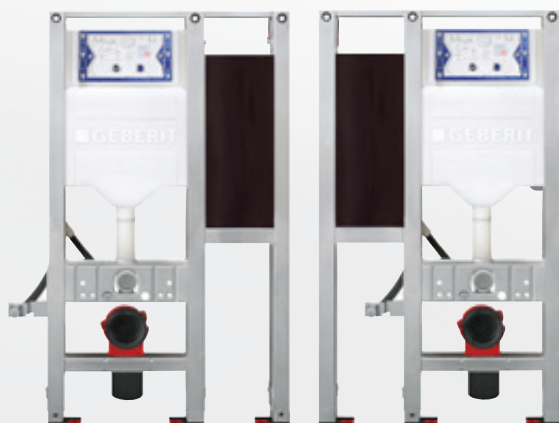

with mounting on the right

with mounting on the left

Design Ref. no.

Design Ref. no.

### with mounting on the right Installation height 1120 mm

Geberit cistern Sigma  
with 2-quantity flush 211606.01  
Burda cistern K770  
with 2-quantity flush 211303.00

### with mounting on the left Installation height 1120 mm

Geberit cistern Sigma  
with 2-quantity flush 211666.01  
Burda cistern K770  
with 2-quantity flush 211330.00

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Mounting plate right or left
- Actuation from the front

Dimensions: W / H / D 750 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

**Accessories included:**  
3 Sound-decoupled wall brackets for pre-wall mounting

**Accessories optional:**  
Flush plates and flushing systems from page 67

**Note:**  
WC power brackets for WC ceramics with small contact surface less 17 cm (e.g. Flaminia, Sentique), page 50


all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



## BS+ WC element „Reno-Kit“

Replacement module for existing stud walls / pre-wall installations

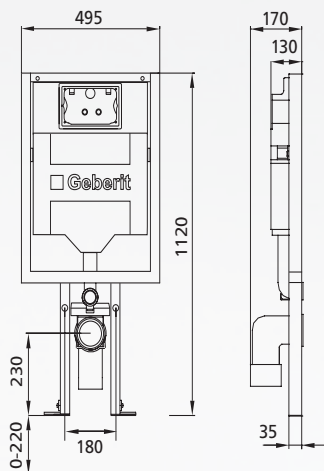

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 495 / 1120 / 170 mm (with waste pipe)  
Suitable for standard wall-hung WCs.

### Accessories:

Flush plates and flushing systems from page 67

Design

Ref. no.

### barrier-free Installation height 1120 mm

Geberit cistern Sigma with 2-quantity flush	211630.01
Burda cistern K770 with 2-quantity flush	211635.00

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)




## BS+ element for Laufen Bernina / Geberit Publica wall-mounted sinks (formerly Keramag Espital) with concealed cistern, for wall-mounted tap




Example:  
Laufen Bernina



Example:  
Geberit Publica

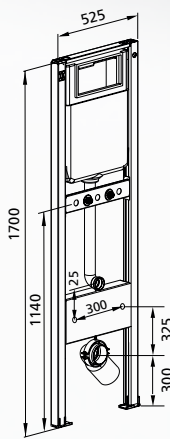

Traverse adjustable  
from 770-1250

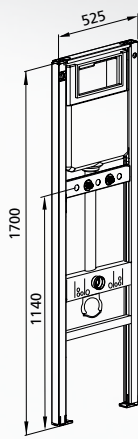

Traverse adjustable  
from 770-1140

- Galvanised, self-supporting and sound-decoupled steel construction
- WC ceramic fixtures 180 and 230 mm
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern with dual-flush technology
- Building protection for inspection opening
- Construction plug for inlet and outlet pipe
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Cistern connection bracket (exception 211061, 211062) with integrated or separate angle valve
- 2 sound-decoupled, width-adjustable 1/2" wall ducts
- Actuation from the front

Dimensions: W / H / D 525 / 1700 / 160 mm (with waste pipe)

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52  
Flush plates and flushing systems from page 67

Design

Ref. no.

### Laufen Bernina Installation height 1700 mm

Geberit cistern Sigma with 2-quantity flush	211057.01
Geberit cistern Delta with 2-quantity flush	211061.99
Burda cistern K770 with 2-quantity flush	211065.00

Design


Ref. no.

### Geberit Publica Installation height 1700 mm

Geberit cistern Sigma with 2-quantity flush	211060.01
Geberit cistern Delta with 2-quantity flush	211062.99
Burda cistern K770 with 2-quantity flush	211066.00



## BS+ washstand element for standing fitting

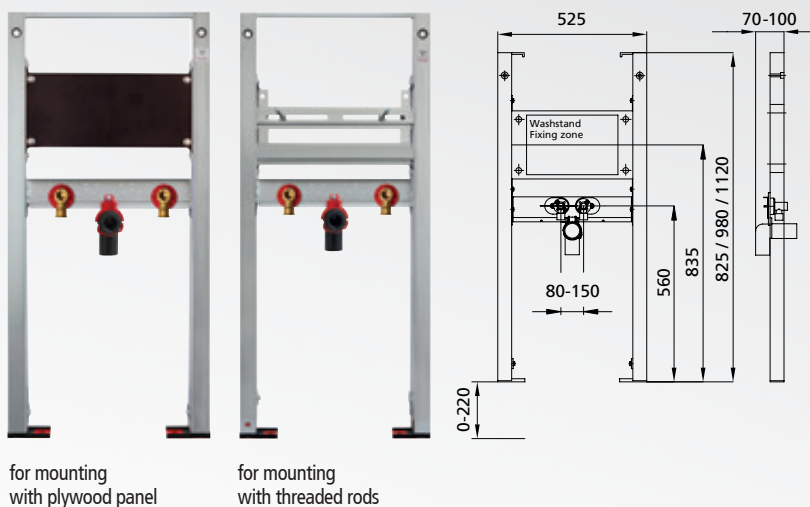

Design	Ref. no.	Design	Ref. no.
<b>Installation height 825-980 mm for standing fitting</b>		<b>Installation height 1120 mm for standing fitting</b>	
for fastening with plywood panel	212018.xx	for fastening with plywood panel	212005.xx
For fastening with threaded rods	212218.xx	For fastening with threaded rods	212205.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 70-100 mm (with waste pipe), WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 52

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2" .99 without connection



## BS+ washstand element for wall fitting

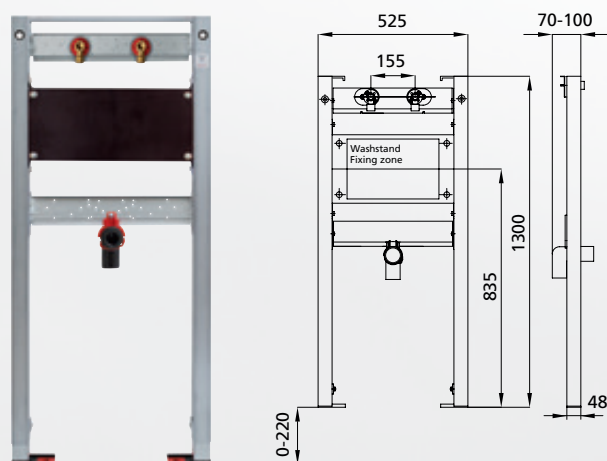

Design	Ref. no.
<b>Installation height 1300 mm for wall fitting</b>	212029.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with waste pipe) WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 52

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2" .99 without connection



BS+ in-line washstand element, 112 cm, for standing fitting

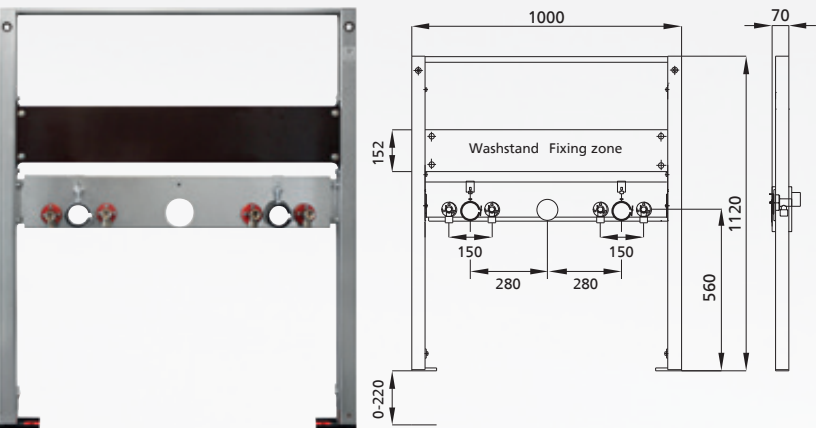

Example 212041.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Connection elbow PE-HD DN 50 mm
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 1000 / 1120 / 70 mm (with waste pipe)  
On request also 825 or 980 mm height


**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**  
Please submit a drawing of the washbasin used with the order.

Design	Ref. no.	Design	Ref. no.
<b>Universal Duo washstand</b>		<b>Universal Duo washstand</b>	
2 x stand fittings, 1 x centre drain	212040.00	2 x stand fittings, 2 x drain	212041.00



BS+ double washstand element

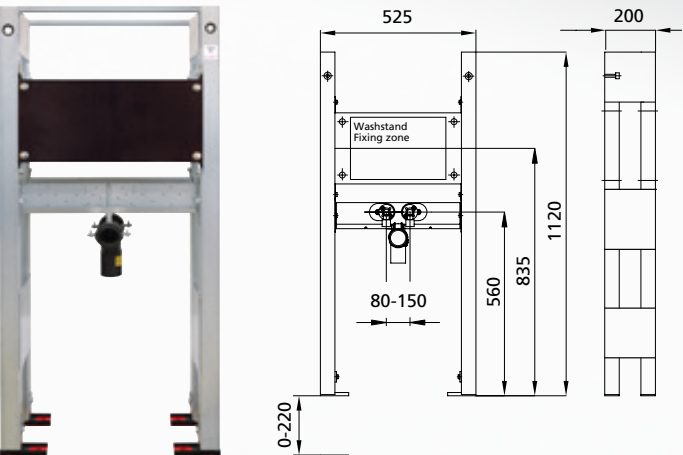

Design	Ref. no.
<b>Installation height 1120 mm for wall fitting</b>	212221.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- HDPE breeches branch DN 50
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 or 1120 / 200 mm (with waste pipe)  
WT mounting dimension max. 375 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52


**Note:**  
Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ washstand element for concealed fitting



Depth-adjustable  
tap plate

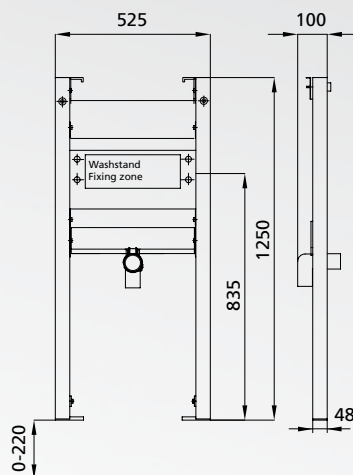

Design

Ref. no.

Installation height 1250 mm  
for concealed fitting

212030.99

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm


Dimensions: W / H / D 525 / 1250 / 100 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 52



## BS+ washstand element for water meter and concealed shut-off valve

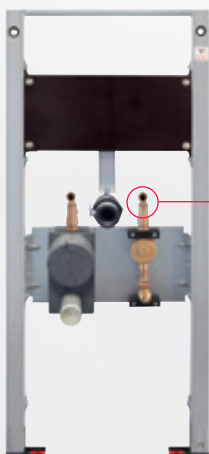

1/2" IG front

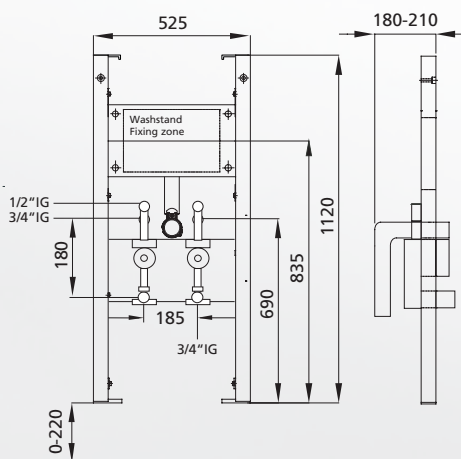

Design

Ref. no.

Installation height 1120 mm  
for free-standing fitting

for 2 water meters

212028.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate
- 2 concealed fitting combinations, gunmetal water meter shut-off valves, incl. insulation, which also serves as a plastering aid, Gunmetal in accordance with DIN-EN 1982 and DIN 50930 Part 6, sealing elements made of EPDM (KTW, W270 tested), consisting of: Concealed single-pipe connection piece for MTK / MTW-NG (2" EAS) incl. dummy cover and gasket set; UP piston valve, free of dead space and low pressure loss, DIN-DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1) 2 sound-insulated brackets; 2-part polystyrene insulation Building material class B1, permissible operating overpressure PB: 10 bar Permissible operating temperature TB: 90 °C, flow medium: drinking water

Dimensions: W / H / D 525 / 1120 / 180-210 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52


### Optional:

Pre-assembled shut-off valve set of 2 pieces  
Item no. 960056





## BS+ washstand element for water meter and concealed shut-off valve

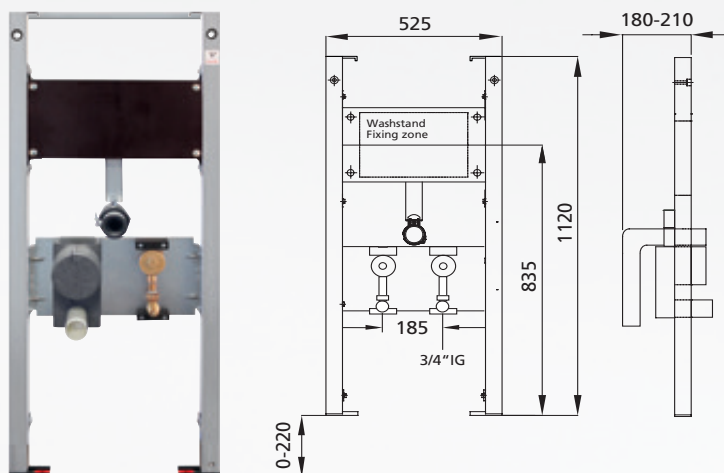

Design

Ref. no.

Installation height 1120 mm  
for free-standing fitting

for 2 water meters  
without connections

212028.99

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate
- Upper part for the barrier, chrome
- 2 concealed fitting combinations, gunmetal water meter shut-off valves, incl. insulation, which also serves as a plastering aid, Gunmetal in accordance with DIN-EN 1982 and DIN 50930 Part 6, sealing elements made of EPDM (KTM, W270 tested), consisting of: Concealed single-pipe connection piece for MTK / MTW-NG (2" EAS) incl. dummy cover and gasket set; UP piston valve, free of dead space and low pressure loss, DIN-DVGW tested with sound insulation in accordance with DIN 4109 (fitting group 1) 2 sound-insulated brackets; 2-part polystyrene insulation Building material class B1, permissible operating overpressure PB: 10 bar Permissible operating temperature TB: 90 °C, flow medium: drinking water

Dimensions: W / H / D 525 / 1120 / 180-210 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 52

### Optional:

Pre-assembled shut-off valve set of 2 pieces  
Item no. 960056



## BS+ washstand element for free-standing fitting for washstand Duravit Scola #68460, #68560

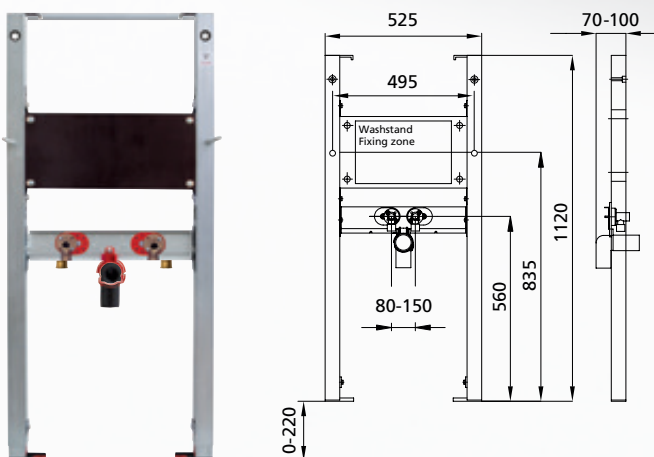

Design

Ref. no.

Installation height 1120 mm  
for free-standing fitting

212007.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and assembly accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Fixing bolt, distance 495 mm

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with waste pipe),  
Surcharge for other connection types on request

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52


### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection





BS+ washstand element for wall fitting  
Barrier-free design with trap

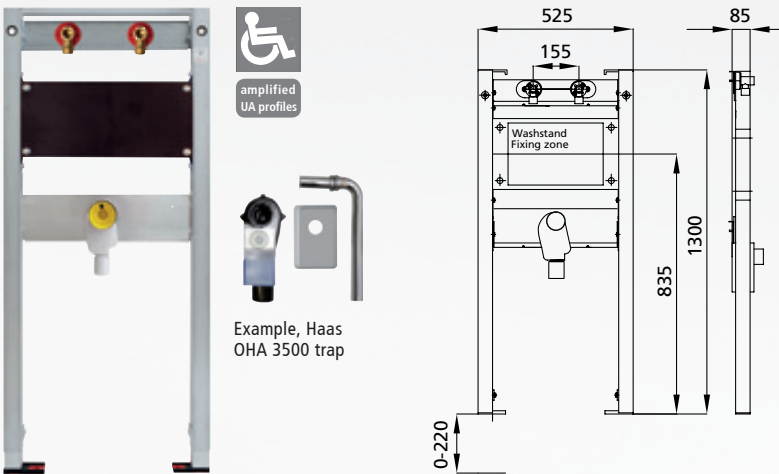

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 85 mm (with waste pipe),  
WT mounting dimension max. 375 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**  
Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection


Design	Ref. no.
--------	----------

Installation height 1300 mm  
for wall fitting

Haas OHA 3500 trap	212143.xx
Geberit trap	212343.xx



BS+ washstand element for free-standing fitting  
Barrier-free design for Paracelsus/Vitalis

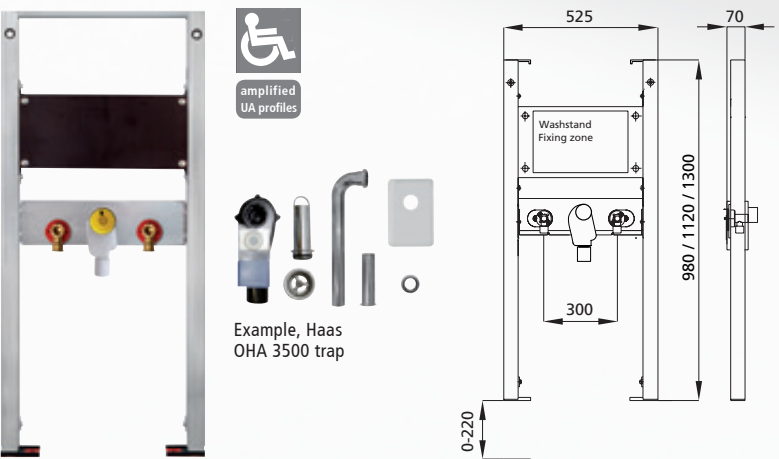

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- built-in trap
- Connecting elbow and cover white and chrome standpipe
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 980, 1120 oder 1300 / 70 mm  
(with waste pipe), WT mounting dimension max. 375 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**  
Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection

Design	Ref. no.
--------	----------

Installation height 980 mm for free-standing fitting	
Haas OHA 3500 trap	213142.xx

Installation height 1120 mm for free-standing fitting	
Haas OHA 3500 trap	213138.xx

Geberit trap	213338.xx
--------------	-----------

Design	Ref. no.
--------	----------


Installation height 1300 mm for free-standing fitting	
Haas OHA 3500 trap	213140.xx

Geberit trap	213340.xx
--------------	-----------






**BS+ washstand element for free-standing fitting,**  
Barrier-free design with concealed trap,  
incl. mounting plates for folding support handles right + left

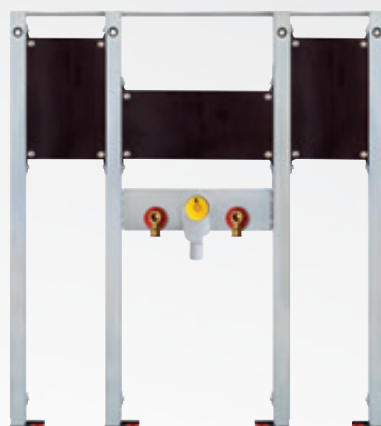

Example Urinal trap,  
Haas OHA 3500

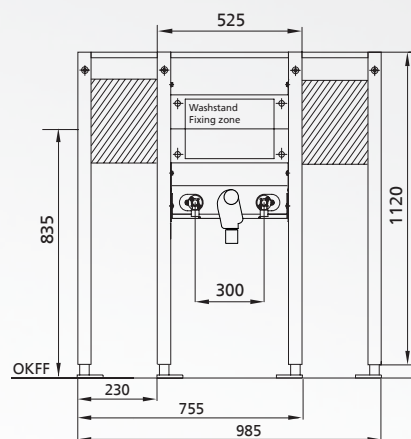

Design Ref. no.

**Installation height 1120 mm**  
**right + left**  
**for free-standing fitting**

Haas OHA 3500 trap	212616.xx
Geberit trap	212636.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Mounting plate left and right

Dimensions: W / H / D 985 / 1120 / 85 mm (with waste pipe), for 2 handles  
WT mounting dimension max. 375 mm

**Accessories:**

Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**


Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



**BS+ washstand element for free-standing fitting,**  
Barrier-free design with concealed trap,  
incl. mounting plates for folding support handles right or left



Example Urinal trap,  
Haas OHA 3500

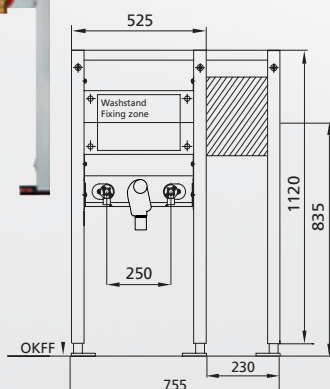

Design Ref. no.

**Installation height 1120 mm**  
**right for free-standing fitting**

Haas OHA 3500 trap	212676.xx
Geberit trap	212696.xx

**left for free-standing fitting**

Haas OHA 3500 trap	212160.xx
Geberit trap	212360.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable washbasin installation
- Built-in flush-mounted trap
- Connection elbow and cover chrome
- All fastening and mounting accessories for elements and washbasin
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"
- Mounting plate left or right

Dimensions: W / H / D 755 / 1120 / 85 mm (with waste pipe), for 1 handle  
WT mounting dimension max. 375 mm

**Accessories:**


Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ Washstand element for Dyson Airblade wash + dry WD06 wall fitting washstand mounting with threaded rod

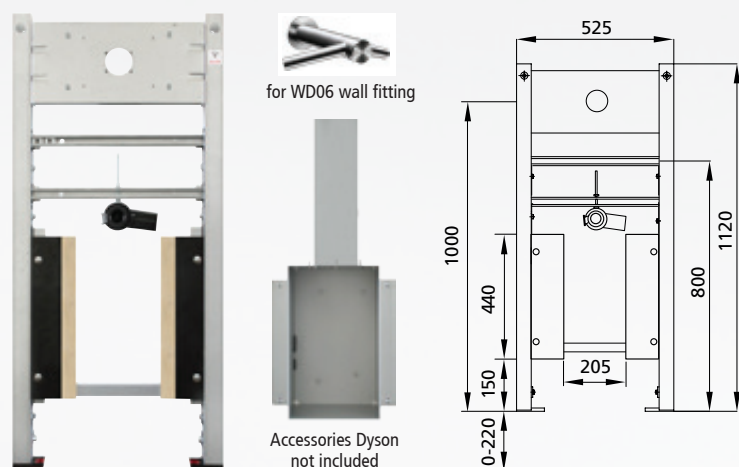

- Galvanised, self-supporting and sound-insulated steel construction
- Mounting plate for variable washbasin installation
- Swivelling siphon bend DN 50
- Rubber nipple 32 mm
- All fixing and mounting accessories
- Adjustable footrests 0-220 mm
- Fitting plate with 2 sound-insulated, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 70-100 mm (with drain)  
WT mounting dimension max. 375 mm

### Accessories:

Sound-insulated wall brackets for pre-wall mounting, page 52

Design


Ref. no.

Overall height 1120 mm  
for Dyson Airblade  
wash and dry

212201



## BS+ Washstand element DLE-Fix Basic

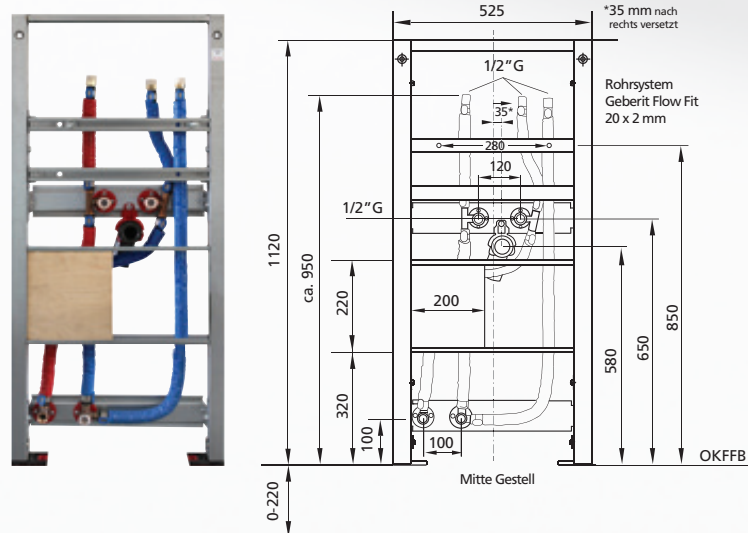

- For instantaneous water heaters
- Includes internal piping
- For stand fittings
- Includes wall bracket for pre-wall installation

Dimensions: W / H / D 525 / 1120 / 100 mm (with drain)

### Accessories:

Sound-insulated wall bracket for pre-wall installation, page 52

Design


Ref. no.

Overall height 1250 mm  
for standard fittings

212037.00



## BS+ Washstand element DLE-Fix Comfort

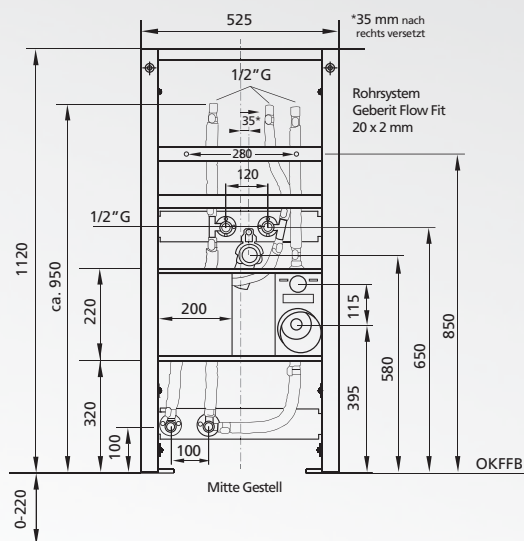

Design

Ref. no.

Overall height 1250 mm  
for standard fittings

212022.00

- For instantaneous water heaters
- Includes internal piping
- For stand fittings
- Includes wall bracket for pre-wall installation
- For installation of a water meter measuring capsule with 2 KOAX thread



Dimensions: W / H / D 525 / 1120 / 100 mm (with drain)

### Accessories:

Sound-insulated wall bracket for pre-wall installation, page 52



## BS+ Washstand element DLE-Fix Comfort Jumbo

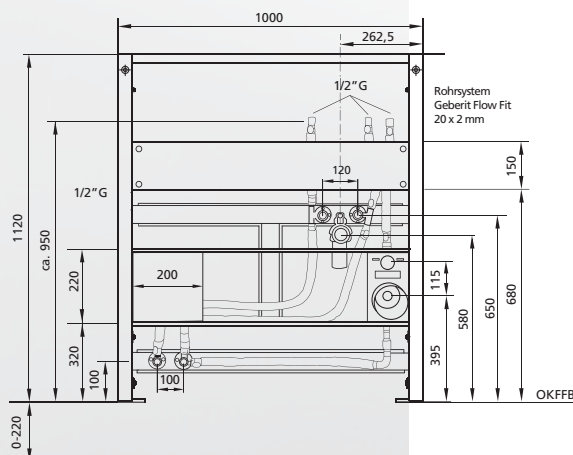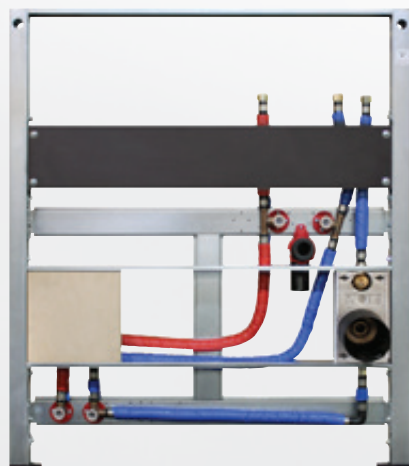

Design

Ref. no.

Overall height 1250 mm  
for standard fittings

212020.00

- BS+ washbasin module
- DLE-Fix Comfort Jumbo
- For water meters and instantaneous water heaters
- Including internal piping
- For floor-mounted fittings
- Including wall bracket for pre-wall installation


Dimensions: W / H / D 1000 / 1120 / 100 mm (with drain)

### Accessories:

Sound-insulated wall bracket for pre-wall installation, page 52



## BS+ sink element for wall fitting

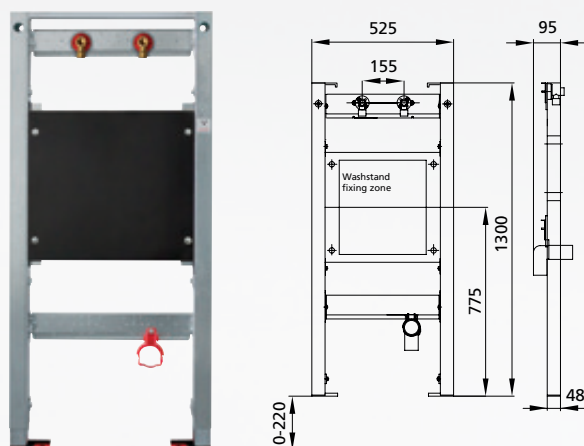

Design

Ref. no.

Installation height 1300 mm for wall fitting 212012.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable sink installation
- swivelling HT urinal trap DN 50
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Fitting plate with 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 1120 / 95 mm (with waste pipe),  
WT mounting dimension max. 375 mm

### Accessories:


Sound-decoupled wall brackets for pre-wall installation, page 52

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ wall-mounted bidet element

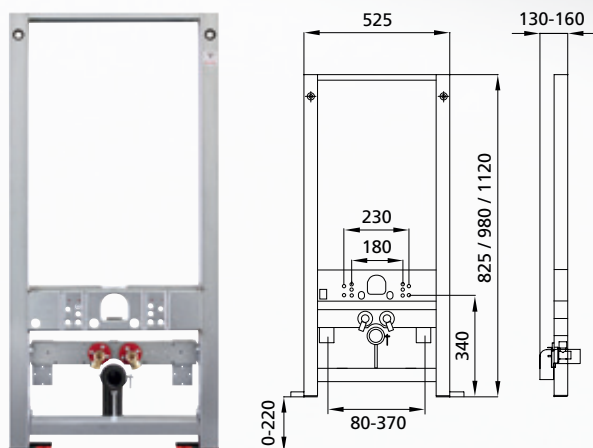

Design

Ref. no.

Installation height 825 mm 233002.xx

Installation height 980 mm 223002.xx

Installation height 1120 mm 213002.xx

- Galvanised, self-supporting and sound-decoupled steel construction
- Variable bidet ceramic fittings
- swivelling HT urinal trap DN 50
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2"

Dimensions: W / H / D 525 / 825, 980 oder 1120 / 130-160 mm  
(with waste pipe), suitable for bidets, see fitting list (enclosed in the box)

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52

### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection

### Note:

With some ceramics, it may be necessary to mount the supplied clamp in the crossbar from below rather than from above, so that the abutment (absorbs the force of the ceramic) as close as possible to the back of the ceramic.


In some assembly cases, it may also be necessary the threaded rod must be shortened accordingly.

These points should be clarified beforehand by looking at the ceramic.

As the manufacturer, we do not accept any liability for incorrect installation!



## BS+ urinal element with concealed flush valve or shell set and empty element

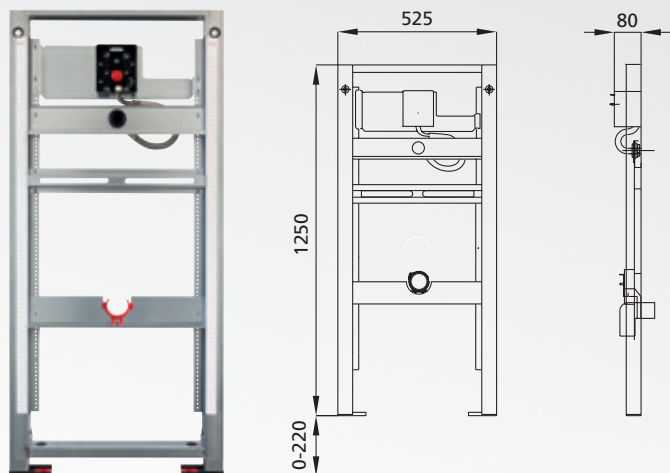

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- swivelling drain elbow DN 50
- Pre-assembled flush-mounted flush valve or pipework set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap (#255101, 255102, 255103 und 255104 ohne),
- Urinal connection set (#255101, 255102, 255103 und 255104 ohne),

Dimensions: W / H / D 525 / 1120-1250 / 80 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52


### Note:

Suitable for urinals, see fitting list (enclosed in the box).

Design	Ref. no.	Design	Ref. no.
<b>Installation height 1250 mm</b>			
Burda flush valve U-05/06	214029	Blank element Universal for surface-mounted flush valves/ waterless urinals	214556
Burda flush valve U-05/06 for spray head	214030		



## BS+ urinal element with flush-mounted shell set Flowtronik

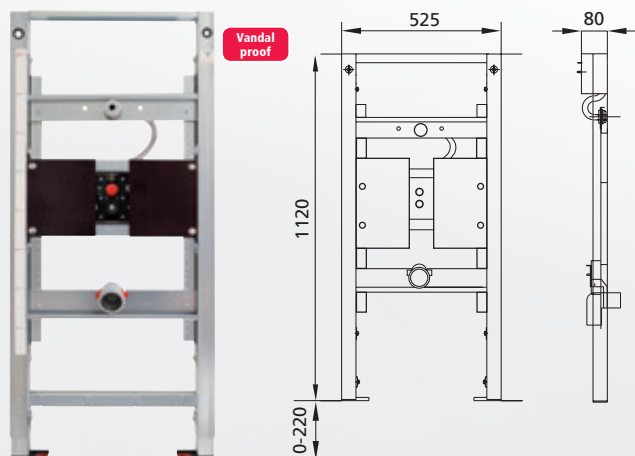

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set with 230 V connection
- Valve block with water shut-off
- Functions: Standard and stadium operation, forced flushing
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal connection set

Dimensions: W / H / D 525 / 1120 / 80 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52

### Note:


Suitable for urinals with horizontal outlet to the rear (vertical outlet on request), see fitting list (enclosed in the box).

Not suitable for urinals with moulded-in trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.

Design	Ref. no.
<b>Installation height 1120 mm</b>	
Burda shell set Flowtronik	214800
Burda shell set Flowtronik for spray head	214801



BS+ urinal-element  
with flush-mounted shell set Geberit VS

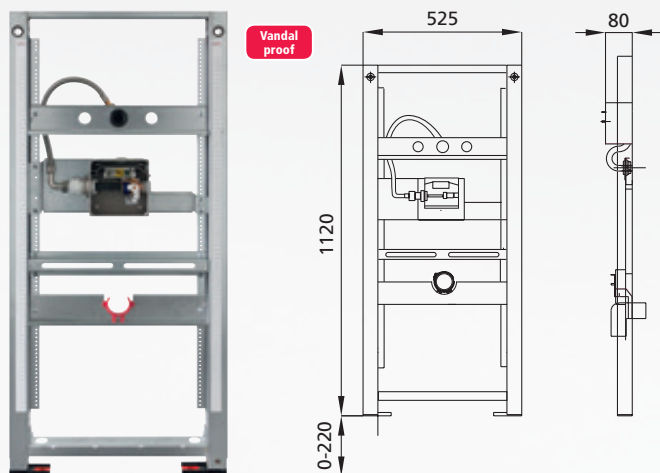

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set with 230 V connection
- Valve block with water shut-off
- Functions: Standard and stadium operation, forced flushing
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal connection set

Dimensions: W / H / D 525 / 1120 / 80 mm

**Accessories:**

Urinal flushing systems from page 81

Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**

**Note:** Suitable for urinals with horizontal outlet to the rear (vertical outlet on request), see fitting list (enclosed in the box).

Not suitable for urinals with moulded-in trap,  
e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00 etc.

Design	Ref. no.
--------	----------


**Installation height 1120 mm**

Geberit shell set Universal  
for VS 214718

Geberit shell set Universal for VS <b>for spray head</b>	214720
--	--------



BS+ urinal element  
with flush-mounted shell set or electronics

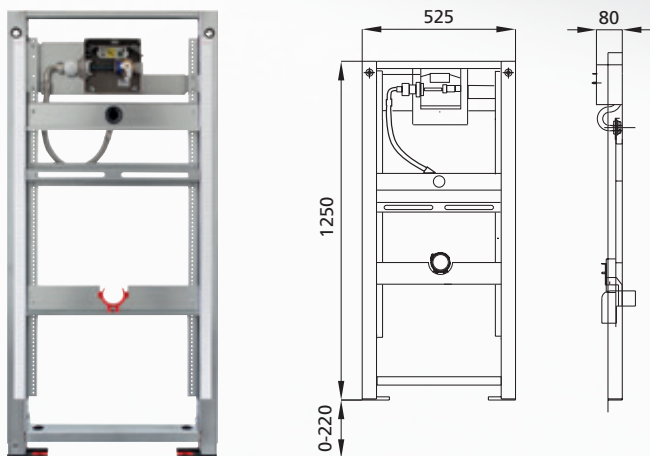

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1120 -1250 / 80 mm

**Accessories:**

Urinal flushing systems from page 81

Sound-decoupled wall brackets for pre-wall installation, page 52

**Note:**

Suitable for urinals, see passport list (enclosed in the box).

Design	Ref. no.	Design	Ref. no.
1	1	1	1
2	2	2	2
3	3	3	3
4	4	4	4
5	5	5	5
6	6	6	6
7	7	7	7
8	8	8	8
9	9	9	9
10	10	10	10
11	11	11	11
12	12	12	12
13	13	13	13
14	14	14	14
15	15	15	15
16	16	16	16
17	17	17	17
18	18	18	18
19	19	19	19
20	20	20	20
21	21	21	21
22	22	22	22
23	23	23	23
24	24	24	24
25	25	25	25
26	26	26	26
27	27	27	27
28	28	28	28
29	29	29	29
30	30	30	30
31	31	31	31
32	32	32	32
33	33	33	33
34	34	34	34
35	35	35	35
36	36	36	36
37	37	37	37
38	38	38	38
39	39	39	39
40	40	40	40
41	41	41	41
42	42	42	42
43	43	43	43
44	44	44	44
45	45	45	45
46	46	46	46
47	47	47	47
48	48	48	48
49	49	49	49
50	50	50	50
51	51	51	51
52	52	52	52
53	53	53	53
54	54	54	54
55	55	55	55
56	56	56	56
57	57	57	57
58	58	58	58
59	59	59	59
60	60	60	60
61	61	61	61
62	62	62	62
63	63	63	63
64	64	64	64
65	65	65	65
66	66	66	66
67	67	67	67
68	68	68	68
69	69	69	69
70	70	70	70
71	71	71	71
72	72	72	72
73	73	73	73
74	74	74	74
75	75	75	75
76	76	76	76
77	77	77	77
78	78	78	78
79	79	79	79
80	80	80	80
81	81	81	81
82	82	82	82
83	83	83	83
84	84	84	84
85	85	85	85
86	86	86	86
87	87	87	87
88	88	88	88
89	89	89	89
90	90	90	90
91	91	91	91
92	92	92	92
93	93	93	93
94	94	94	94
95	95	95	95
96	96	96	96
97	97	97	97
98	98	98	98
99	99	99	99
100	100	100	100


**Installation height 1250 mm**

Geberit shell set universal for HyTronic and HyTouch	214712	for Geberit Flushcontrol	214856
		for Duravit Utronic	214506
Geberit shell set universal for HyTronic and HyTouch <b>for spray head</b>	214714		





## BS+ urinal-element with flush-mounted shell set or electronics

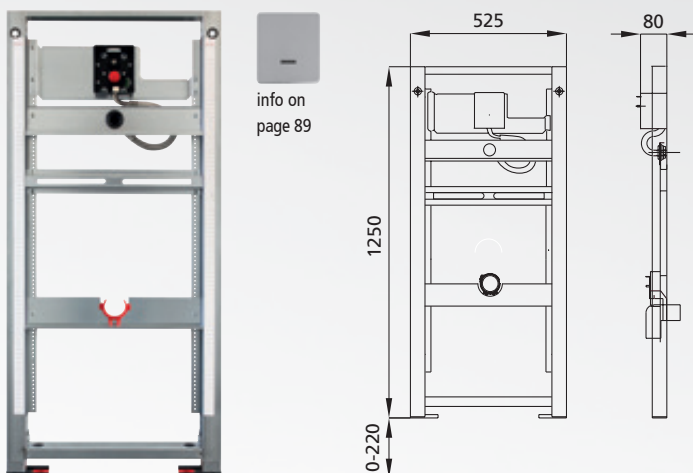

- Galvanised, self-supporting and sound-decoupled steel construction
- Mounting plate for variable urinal installation
- Adjustable, sound-decoupled water inlet traverse
- Adjustable drain crossbar
- Pre-assembled shell set
- Construction protection for inspection opening
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- Connection 1/2"
- Urinal trap
- Urinal connection set

Dimensions: W / H / D 525 / 1250 / 80 mm

### Accessories:

Urinal flushing systems from page 81

Sound-decoupled wall brackets for pre-wall installation, page 52

### Note:

Suitable for urinals, see passport list (enclosed in the box).

Design	Ref. no.	Design	Ref. no.
--------	----------	--------	----------

### Installation height 1250 mm

with Burda shell set  
for infrared electronics,  
for BurdaTronic U-09


214989

Mit Burda shell set  
for infrared electronics,  
for BurdaTronic U-09  
for spray head

214889



## BS+ shower element with pre-mounted Geberit drain

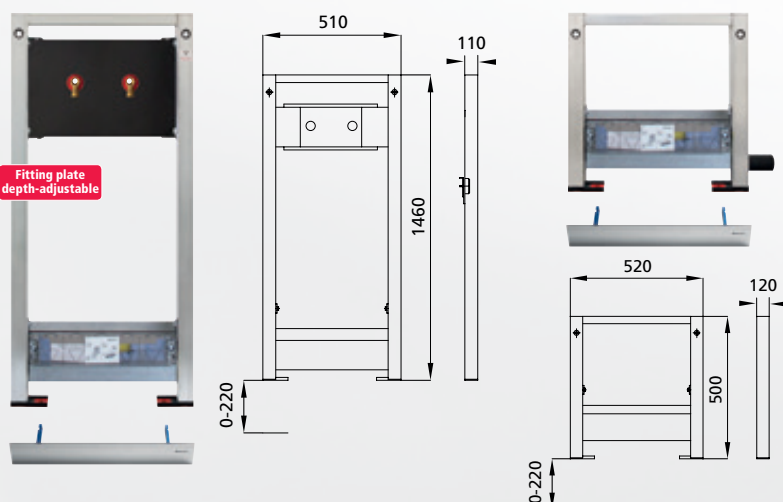

For installation in a stud wall in accordance with DIN 18183  
or in conjunction with accessory set art. no. 240012 as a single  
element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings
- Pre-assembled Geberit shower drain for draining floor-level showers, cover, plastic chrome

Dimensions: W / H / D 525 / 1460 / 80 mm,

Dimensions: W / H / D 525 / 500 / 80 mm

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52

### Prefabricated set for Geberit wall drain,



- Removable for cleaning
- With cover and allen key

Design	Ref. no.	Design	Ref. no.
--------	----------	--------	----------

Drain DN40 for screed height  
at inlet 65-90 mm  
Installation height 1460 mm

for surface-mounted fittings 230120.00

for flush-mounted fittings 218010

Installation height 500 mm 230125

Drain DN50 for screed height  
at inlet 90-200 mm  
Installation height 1460 mm

for surface-mounted fittings 230121.00

for flush-mounted fittings 218011

Installation height 500 mm 230126

Design	Ref. no.
--------	----------

brushed stainless steel 230040


brushed stainless steel  
(for screwing) 230041

polished stainless steel 230042





BS+ shower element for showerhead

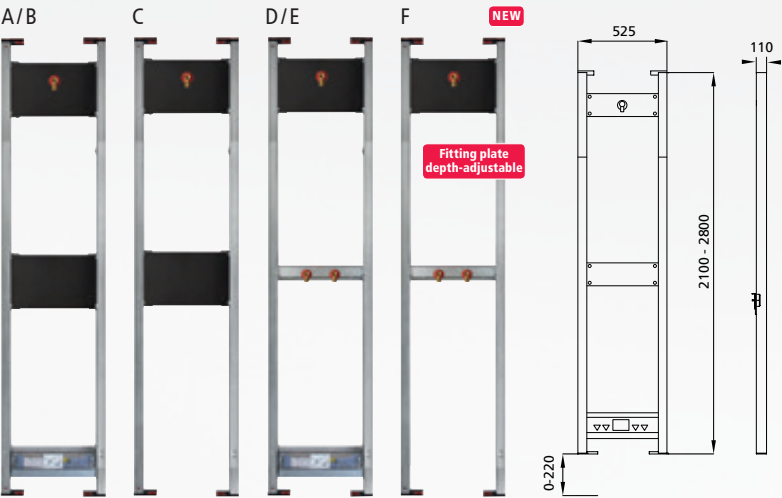

For installation in a stud wall in accordance with DIN 18183 or in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings
- Crossbar for shower head
- Pre-assembled Geberit shower drain SH 30, sealing water height 30 mm, Drain DN40, for draining floor-level showers, cover Chrome plastic


Taverses are height and depth adjustable 40-110mm  
Dimensions: W / H / D 525 / 2100 - 2800 / 110 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52



Design	Ref. no.	Design	Ref. no.
A: for concealed fittings and Geberit wall drain Drain <b>DN40</b> for screed height at the inlet 65-90 mm	235300	D: for surface-mounted fittings and Geberit wall drain Drain <b>DN40</b> for screed height at the inlet 65-90 mm	235350.00
B: for concealed fittings and Geberit wall drain Drain <b>DN50</b> for screed height at the inlet 90-200 mm	235301	E: for surface-mounted fittings and Geberit wall drain Drain <b>DN50</b> for screed height at the inlet 90-200 mm	235351.00
C: for concealed fittings	235200	D: for surface-mounted fittings	235250.00

BS+ bathtub element

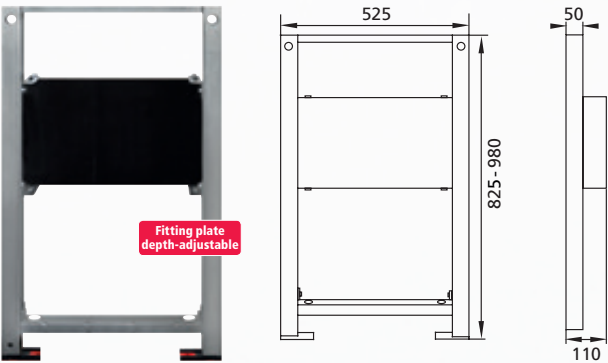

- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings

Taverses are height and depth adjustable 40-110mm  
Dimensions: W / H / D 525 / 825-980 / 110 mm

Installation Height 1120 mm also possible on request!



Design	Ref. no.
bathtub element	235400

## BS+ element for built-in wardrobe for the installation of instantaneous water heaters



Design	Ref. no.
Element for instantaneous water heater cabinet	215010.00
Built-in wardrobe 30 cm	403160
Element for Toilet brush cabinet	215007.00

- Galvanised, self-supporting and sound-decoupled steel construction
  - All fastening and mounting accessories
  - Adjustable footrests up to max. 0-220 mm
- for mounting cuckoo built-in furniture**

### Element for built-in cabinet for instantaneous water heater

- Wall bushings 1/2"
  - Cut-out for flush-mounted electrical box
- Dimensions: W / H 450 / 1120 mm

### Built-in cabinet for instantaneous water heater

White silk matt lacquered front, door hinge right or left  
Dimensions: W 300 mm

All wardrobe elements suitable for Burda cuckoo furniture series

### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52



## BS+ element for built-in wardrobe with integrated toilet brush



Design	Ref. no.
Built-in wardrobe 20 cm with integrated toilet brush	403055
Cabinet elements on request also in 60 cm width, 90 cm width and 120 cm height, 80 cm height available	

- Galvanised, self-supporting and sound-decoupled steel construction
  - All fastening and mounting accessories
  - Adjustable footrests up to max. 0-220 mm
- for mounting cuckoo built-in furniture**

### Element for built-in cabinet for toilet brush

Dimensions: W / H 350 / 1120 mm

### Built-in cabinet with integrated toilet brush

White silk matt lacquered front, incl. one glass shelf and brush holder with brush in chrome, door hinge right or left  
Dimensions: W 200 mm

All wardrobe elements suitable for Burda cuckoo furniture series


### Accessories:

Sound-decoupled wall brackets for pre-wall installation, page 52



BS+ Fastening elements

For mounting grab rails, support rails and folding handles or folding shower seats

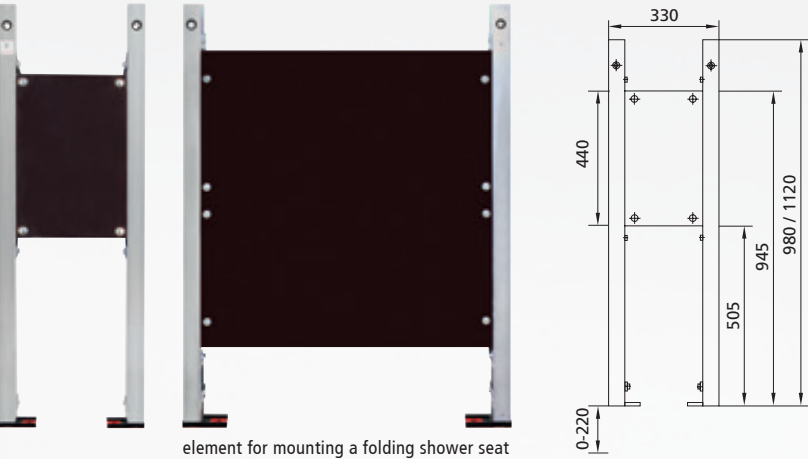

Design	Ref. no.	Design	Ref. no.
<b>Retaining element for support and folding handles</b>		<b>Retaining element for folding shower seat</b>	
Installation height 980 mm	241022	Installation height 1120 mm	242022
Installation height 1120 mm	240022		

For **holding, supporting and folding handles** et cetera  
For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.

- Galvanised, self-supporting and sound-decoupled steel construction
- Built-in mounting plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 330 / 980 or 1120 / 50 mm

**Element to accommodate a folding shower seat**  
For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.


- Galvanised, self-supporting and sound-decoupled steel construction
- Built-in mounting plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 850 / 1120 / 50 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52



BS+ element for surface-mounted / concealed fittings

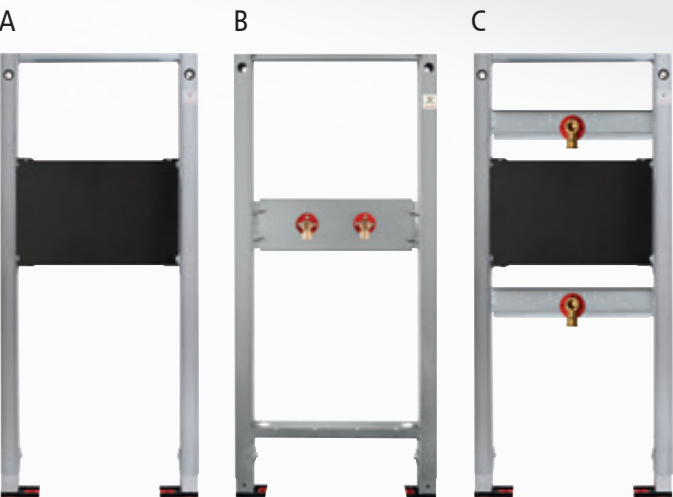

Design	Ref. no.
<b>Installation height 1120 mm</b>	
A: for flush-mounted fittings	218008
B: for surface-mounted fittings	230108.xx
C: Wall fitting for showers and bathtub	230109

For installation in a stud wall in accordance with DIN 18183 or in conjunction with accessory set art. no. 240 008 as a single element in a pre-wall installation.


- Galvanised, self-supporting and sound-decoupled steel construction
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm
- 2 sound-decoupled, width-adjustable wall discs 1/2" or fastenings for standard flush-mounted fittings

Dimensions: W / H 525 / 1120 mm

**Accessories:**  
Sound-decoupled wall brackets for pre-wall installation, page 52



Universal traverse for surface-mounted / flush-mounted fittings  
ventilation, sanitary flushes and other built-in appliances

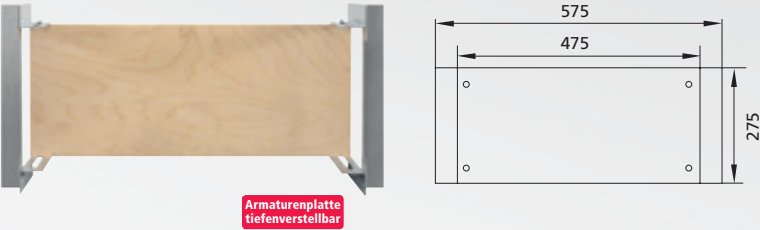


Design	Ref. no.
	215033

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories

Dimensions: W / H / D 575 / 275 / 50-150 mm



BS+ Universal traverse  
for surface-mounted taps / tap valve  
heavy duty / reinforced

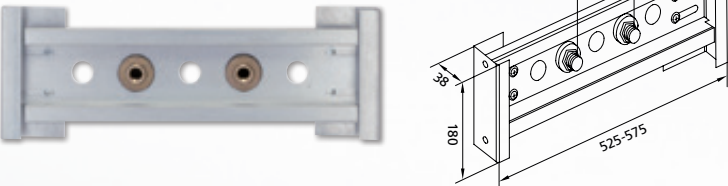


Design	Ref. no.
A: with 2 wall ducts	215006.00
B: with 1 wall duct	216210.00

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Sound-decoupled, width-adjustable 1/2" wall ducts

Dimensions: W / H / D 525-575 / 180 / 38 mm



BS+ universal traverse  
for surface-mounted taps / tap valve

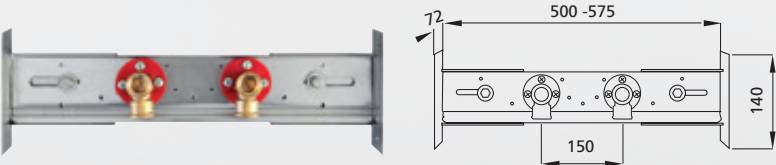


Design	Ref. no.
A: with 2 wall ducts	215005.00
B: with 1 wall duct	216209.00

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Sound-decoupled wall discs 1/2"

Dimensions: W / H / D 500-575 / 140 / 72 mm



BS+ traverse for washing machine

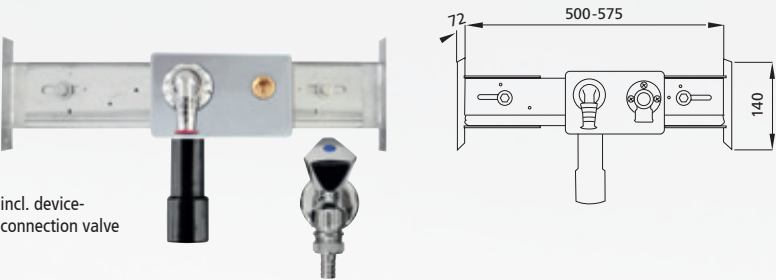

incl. device-connection valve


- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Urinal trap WM and wall disc 1/2"

Dimensions: W / H / D 500-575 / 140 / 72 mm

Design	Ref. no.
with urinal trap WM and 1/2" connection	216004



BS+ Traverse for kitchen sink

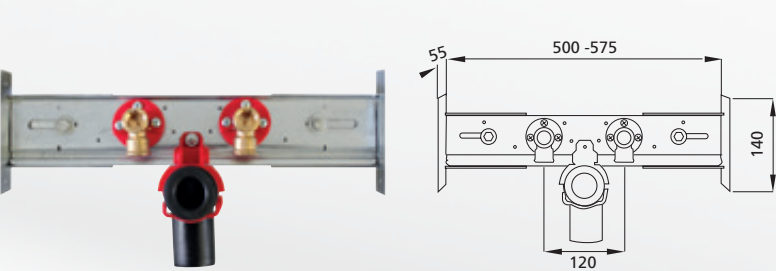


- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- Two sound-decoupled wall discs 1/2"
- Drain elbow DN50

Dimensions: W / H / D 500-575 / 140 / 72 mm

Design	Ref. no.
with wall discs and drain elbow DN50	216100.00
with drain elbow DN50	215013



BS+ traverse for flush-mounted fittings / flush-mounted valves

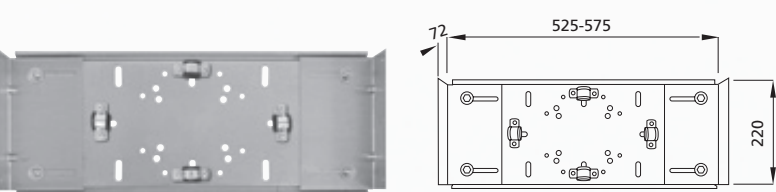


- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories

Dimensions: W / H / D 525-575 / 220 / 72 mm

Design	Ref. no.
with 4 sound-decoupled pipe clamps to hold the concealed valves	216003



## BS+ traverse for water meter

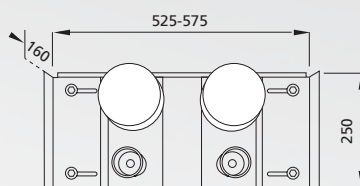

Design	Ref. no.
	215015

- Galvanised sheet metal construction
- Lateral fastening option on CW profiles of a stud wall
- All fastening and mounting accessories
- 2 flush-mounted single-pipe connection piece for MTK / MTW-NG (2" EAS KOAX) incl. dummy cover and gasket set
- 2 Concealed piston valve, free of dead space and low pressure loss (DIN DVGW tested with sound insulation to DIN 4109 (fitting group 1))
- 4 sound-insulated brackets
- 2 two-part polystyrene insulations - building material class B1 (permissible operating overpressure PB: 10 bar, permissible operating temperature TB: 90°C, flow medium: drinking water)

Dimensions: W / H / D 525-575 / 250 / 160 mm




## BS+ Washbasin traverse for floor-standing tap



version A



version B



Design	Ref. no.
<b>Version A</b> with mounting plate made of plywood	230300.xx

Design	Ref. no.
<b>Version B</b> with fastening via threaded rods	230301.xx

### For installation in a stud wall in accordance with DIN 18183.

- Galvanised sheet metal construction
- Mounting plate for variable washbasin installation
- swivelling urinal trap DN 50
- Rubber nipple 32 mm
- All mounting and installation accessories
- Fitting plate to hold the wall discs
- 2 sound-decoupled connection mountings
- Wall discs 1/2"

Version A Dimensions: W / H / D 525 / 485 / 70 mm

Version B Dimensions: W / H / D 525 / 485 / 50 mm


### Note:

Replace end number .xx with .00 for standard connection 1/2" x 1/2"  
.99 without connection



## BS+ universal mounting plate

For holding, supporting and folding handles



Design	Ref. no.
	240015

### For holding mirrors, shelves, grab rails, support and folding handles et cetera


### For installation in a stud wall in accordance with DIN 18183.

- Galvanised sheet metal construction
- built-in mounting plate made of plywood (245 mm high, 30 mm thick) for individual fastening of heavy loads
- All mounting and installation accessories

Dimensions: Plywood panel W / H / D 625 / 245 / 30 mm  
With fixing bracket W / H / D 625 / 685 / 30 mm



BS+ right / left holding element with one foot for holding, supporting and folding handles

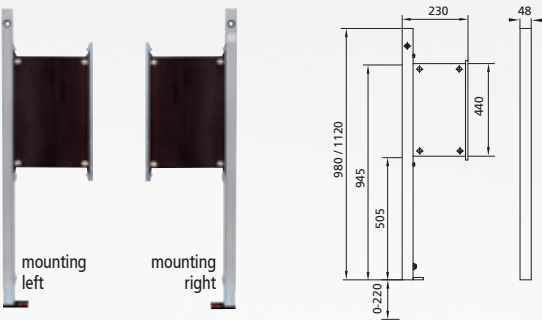

Design	Ref. no.	Design	Ref. no.
Installation height 980 mm right	240043	Installation height 1120 mm right	240023
left	240044	left	240024

Can be used for installation in a pre-wall.

- Galvanised, self-supporting and sound-decoupled steel construction, with one profile, with built-in fastening plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 230 / 980 oder 1120 / 50 mm

Accessories:  
Sound-decoupled wall brackets for pre-wall installation, page 52



BS+ / Santro WC support brackets for WC ceramics with a small contact surface



Design	Ref. no.
1 Paar	216400

For additional support of WC ceramics  
Support surfaces smaller than 17 cm (e.g. Flaminia, Sentique)



Side end element right / left



Design	Ref. no.
Installation height 825 mm right/left	on request
Installation height 980 mm right/left	on request
Installation height 1120 mm right/left	219001

Can be used for installation in a pre-wall.

For extending an extension section and for bridging distances distances over 625 mm wide between sanitary modules et cetera

- Galvanised, self-supporting and sound-decoupled steel construction, with one profile, with built-in fastening plate made of laminated wood (250 mm high, 30 mm thick) for individual fastening of heavy loads
- All fastening and mounting accessories
- Adjustable footrests up to max. 0-220 mm

Dimensions: W / H / D 48 / 825, 980 oder 1120 / 48 mm

Accessories:  
Sound-decoupled wall brackets for pre-wall installation, page 52






## BS+ extension for wall bracket for wall mounting (240008 and 240012) up to 400 mm



Design	Ref. no.
	240010



## BS+ extended feet





Design	Ref. no.
For floor construction up to 400 mm (1 pair)	215101
For floor construction up to 600 mm (1 pair)	215100

- For raised floor construction
- Suitable for all BS+ elements
- Version: In pairs
- Galvanised with plastic feet



## BS+ corner mounting set




Design	Ref. no.
1 pair	218106

For mounting BS+ units as a 45° corner solution.

- Galvanised mounting bracket
- Additional upper corner planking support
- All mounting and assembly accessories



Sound-decoupled wall bracket for front wall mounting, mounting depth 140 -190 mm extendable

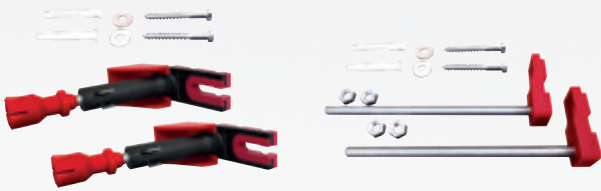

Premium wall bracket (since January 2018)


Wall bracket

Design	Ref. no.
Premium wall bracket	240012
Wall bracket	240008

- New version**
- 2 sound-decoupled wall supports M10
  - All mounting and assembly accessories
  - 2 support brackets
- Old version**
- 2 sound-decoupled wall supports M10
  - All mounting and assembly accessories



BS+ foot mounting on rear wall e.g. for underfloor heating



Design	Ref. no.
1 pair	240020

- 2 galvanised wall supports
- All mounting accessories



universal mounting set



e.g. mounting on the wall

Design	Ref. no.
1 pair	240040

- 2 sound-decoupled wall supports M10
- All mounting and assembly accessories



03 – 18

**Santro** Pre-planked prewall system



19 – 52

**BS+** Dry construction system



53 – 56

**Burda-Block**



57 – 60

**my move elements** Electrically height-adjustable



61 – 66

**Kombiset** Wet construction system



67 – 80

**Flush buttons**



81 – 96

**Flushing systems**



# Burda Block-System

## Burda Vorwand-Block-System

### 1.1 Einsatzbereich

- Vorwandinstallation Nassbau
- Vorwandinstallation Trockenbau
- Inwandinstallation Trockenbau

### 1.2. Aufbau

Verzinkte Profilzargenkonstruktion mit körperschallentkoppelten Einbauteilen (Spülsysteme, Armaturen, Leitungen), wählbarem Abwasseranschluss und stufenlos verstellbaren Standfüßen.

## Leistung und Technik am Beispiel des Burda-Block für Wand-WC

Baurobuste, selbsttragende, korrosionsgeschützte Profilzargenkonstruktion (verzinkt)

Körperschallentkoppelte Sanitärtechnik (Spülsysteme, Armaturen, Leitungen)

Abwasseranschluss wahlweise PE-HD oder Gusseisen

Stufenlos höhenverstellbare Standfüße von 20 bis 200 mm


Moderne, wassersparende WC-Spülsysteme

Flies-, putz- und beplankungsfähige Schlitzbrücken-Metalloberfläche


Inklusive WC-Anschlussgarnitur und Montagezubehör für Rohmontage

Montageraumabdeckung (MRA) als Widerlager zur Benutzerlastenaufnahme, d. h. Ausmauerung nicht erforderlich!

**Hinweis:** Alle Montageanleitungen, sonstige Unterlagen und Prüfzeugnisse finden Sie im Download-Bereich unter [www.burda-online.com](http://www.burda-online.com)

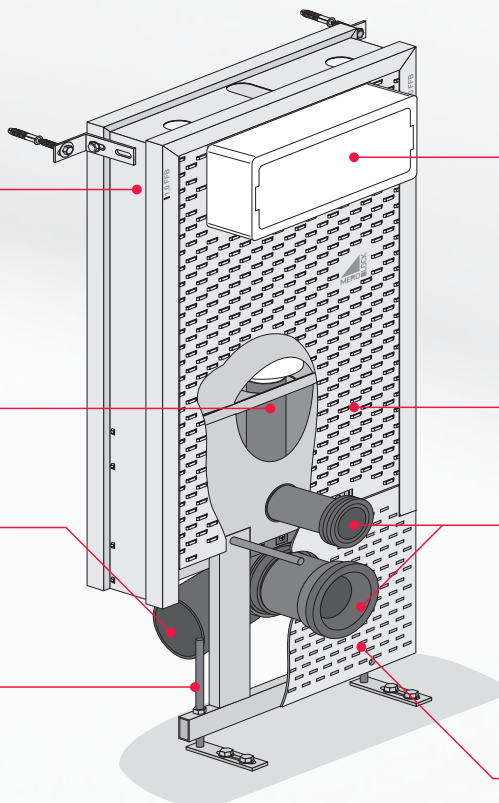

## Burda-Block wall-mounted WC element

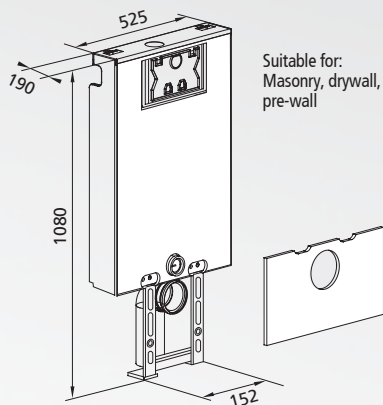

Design

Ref. no.

Geberit concealed cistern Sigma  
with 2-quantity flush

400008.01

- galvanised, self-supporting steel construction
- Surface ready for tiling
- WC ceramic fixings 180 and 230 mm
- swivelling outlet elbow DN 80 / 100
- Wall-mounted WC connection set
- Built-in, fully insulated concealed cistern
- 2-quantity flush technology
- Angle valve, 1/2
- Construction protection for the inspection opening
- Building plugs for inlet and outlet
- All installation accessories
- Adjustable footrests up to 260 mm
- Cistern connection bracket 1/2" with angle valve and connection hose
- Installation space cover

Dimensions: W / H / D 525 / 1080 / 190 mm

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC frames with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)





03 – 18

**Santro** Pre-planked prewall system



19 – 52

**BS+** Dry construction system



53 – 56

**Burda-Block** combined wet and dry construction system



67 – 60

**my move Elemente** my move WC page 70-71  
my move WT page 72



61 – 66

**Kombiset** Wet construction system



67 – 80

**Flush buttons**



81 – 96

**Flushing systems**







my move WC comfort for barrier-free WC facilities  
with electric height adjustment



suitable for: pre-wall

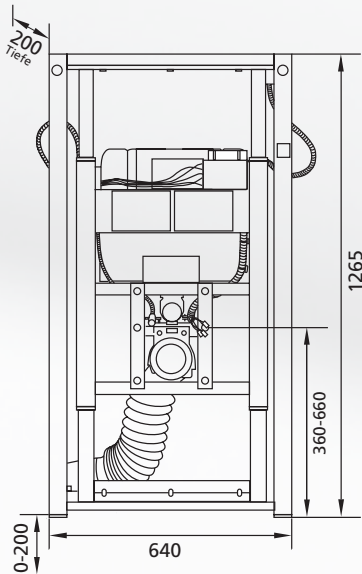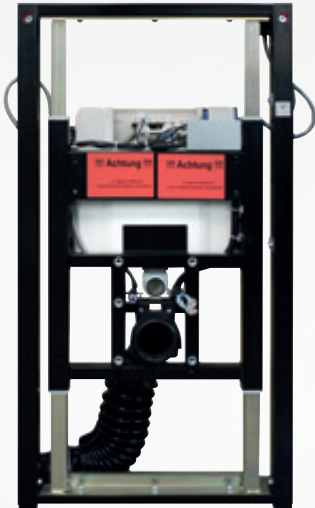

scope of delivery

Self-supporting drywall element made of powder-coated, self-supporting steel construction for wall and floor mounting incl. fixing material.  
(Sound-decoupled with premium wall bracket) for floor structures 0-20 cm with prefabricated internal drinking water and waste water pipework, as well as internal electrical wiring

without support handles

- With concealed cistern K840
- With electric lifting device for WC
- With glass top RAL 9003, signal white, W/H: 500 x 1045 mm
- With radio remote control
- With fibre-reinforced, core-impregnated plasterboard front (2-ply) with all control openings
- Stainless steel protection plate for inspection work

technical data

- WC attachment 180 mm
- WC 30 cm height-adjustable
- Load capacity up to 350 kg

connections:

Electrical connection: via Schuko plug (230 V AC, 50-60 Hz)  
Waste water connection: DN 90, Drinking water connection: R1/2"

optional

- Individual glass panel colour according to RAL
- Panelling for individual installation RAL Classic colours
- Panelling for individual installation RAL Design colours
- Preparation for inclusion of shower toilet
- External button „up/down“
- External button „flush“

Dimensions: W / H / D 640 / 1265 / 200 mm

compatible with Duravit Sensowash®

compatible with Geberit AquaClean



Design	Ref. no.	Design	Ref. no.
my move WC comfort	270001		
Individual glass panel colour according to RAL	270003	Preparation for inclusion of shower toilet	270010
Panelling for individual installation RAL Classic colours	270005	External button „up/down“	270008
Panelling for individual installation RAL Design colours	270007	External button „flush“	270009



my move WC care for barrier-free WC facilities  
with electric height adjustment **with folding support handles**



suitable for: pre-wall

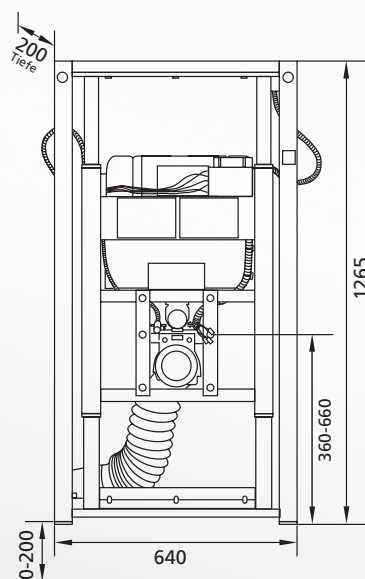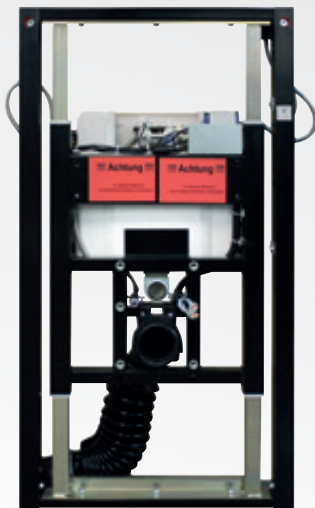

**scope of delivery**

Self-supporting drywall element made of powder-coated, self-supporting steel construction (see my move comfort)

**with folding support handles type 700**

- With concealed cistern K840
- With electric lifting device for WC
- With glass top RAL 9003, signal white, W/H: 500 x 1045 mm
- With radio remote control
- With fibre-reinforced, core-impregnated plasterboard front (2-ply) with all standard openings
- WC attachment 180 mm
- Stainless steel protection plate for inspection work
- 2 x Normbau folding support handles, cavere type, Colour silver-mettalic (similar to RAL 9006) 1 x paper roll holder, 1 x WC release included (side according to customer specification)

**technical data and connections:** (see my move comfort)

**optionally available at no extra charge**

- Folding support rails type 600 or type 800

**optionally available at an extra charge**

- Individual glass panel colour according to RAL
- Panelling for individual installation RAL Classic colours
- Panelling for individual installation RAL Design colours
- Preparation for inclusion of shower toilet
- External button „up/down“
- External button „flush“
- Back support
- Second paper roll holder
- Second control on the folding support handle (up / down / rinse)

Dimensions: W / H / D 640 / 1265 / 200 mm

compatible with Duravit Sensowash®

compatible with Geberit AquaClean



Design	Ref. no.	Design	Ref. no.
<b>my move WC care</b>	270002		
individual glass panel colour according to RAL	270003	External button „up/down“	270008
Panelling for individual installation RAL Classic colours	270005	External button „flush“	270009
Panelling for individual installation RAL Design colours	270007	Back support	270012
Preparation for inclusion of shower toilet	270010	Second paper roll holder	270013
		Second control on the folding support handle (up / down / rinse)	270014



my move *WT comfort* for barrier-free washstand systems  
with electric height adjustment **for on-site washstand**



suitable for: pre-wall

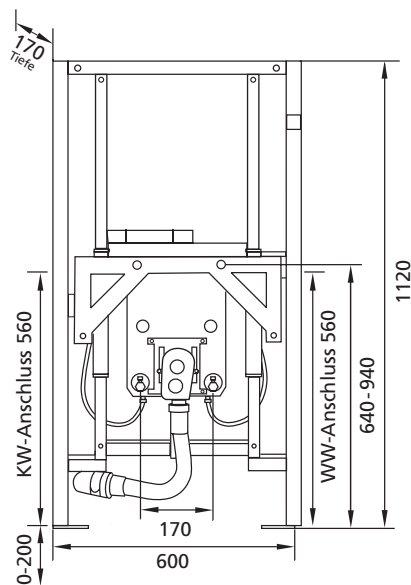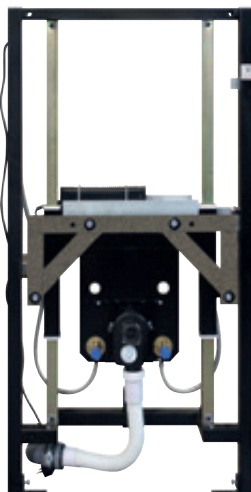

**scope of delivery**

Self-supporting drywall element made of powder-coated, self-supporting steel construction for wall and floor fastening incl. fastening material.  
(sound-decoupled with premium wall bracket) for floor structures 0-20 cm with prefabricated internal drinking water and waste water pipework, as well as internal electrical wiring

- Concealed washstand trap
- Two wall discs
- Glass panel RAL 9003, signal white, W/H: 700 x 1000 mm
- Radio remote control for automatic height adjustment
- Fibre-reinforced, core-impregnated plasterboard front (2-ply) with all standard openings for on-site tiling

**Technical data**

- Washstand attachment 280 mm
- Washstand 30 cm height-adjustable

**Connections:**

Electrical connection: via Schuko plug (230 V AC, 50-60 Hz)

Waste water connection: DN 50, DHW and DHW connection: R1/2"

**optional**

- Individual glass panel colour according to RAL
- Glass panel with mirror, Total W/H 700 x 1450 mm, mirror W/H 700 x 690 mm
- Glass panel with mirror, Total W/H 700 x 1630 mm, mirror W/H 700 x 870 mm
- Panelling for individual installation RAL Classic colours
- Panelling for individual installation RAL Design colours
- External button „up/down“

Dimensions: W / H / D 640 / 1120 / 170 mm



View without integrated mirror

Design	Ref. no.	Design	Ref. no.
<b>my move WT comfort for on-site washbasin</b> Installation height 1120 mm	270501		
Individual glass panel according to RAL	270505	Panelling for individual installation RAL Classic colours	270508
Glass panel with mirror Total W/H 700 x 1450 mm mirror W/H 700 x 690 mm	270506	Panelling for individual installation RAL Design colours	270515
Glass panel with mirror Total W/H 700 x 1630 mm mirror W/H 700 x 870 mm	270513	External button „up/down“	270516



03 – 18

**Santro** Pre-planked prewall system



19 – 52

**BS+** Dry construction system



53 – 56

**Burda-Block** combined wet and dry construction system



57 – 60

**my move elements** Electrically height-adjustable



61 – 66

**Kombiset** <sup>WC</sup> Carrying supports page 62- 63  
Urinal page 64-65



67 – 80

**Flush buttons**




81 – 96

**Flushing systems**



Kombiset WC-element with concealed cistern

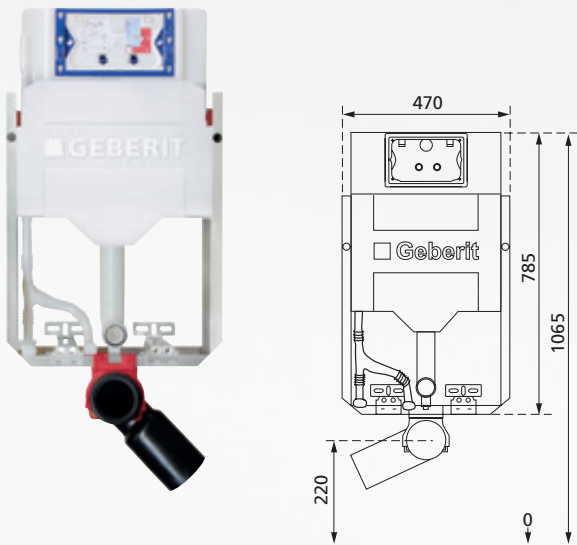

- Mounting unit, galvanised with four fixing points
- Built-in, condensation-insulated concealed cistern
- Ceramic fixing M12, distance 18 or 23 cm
- Drain fastening
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Building protection for the inspection opening
- Water connection 1/2" sink with integrated angle valve

Dimensions: W / H / D 470 / 1065 / 120 mm

**Accessories:**  
Flush plates and flushing systems from page 67  
Support brackets: Page 50


Design	Ref. no.	Design	Ref. no.
with Geberit cistern Sigma with 2-quantity flush	511109.01	<b>Kombiset eco as above, but without individual packaging</b>	
Burda cistern K770 with 2-quantity flush	511114.00	with Geberit cistern Sigma with 2-quantity flush	511117.01

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC-racks with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



Kombiset WC TS with carrying supports

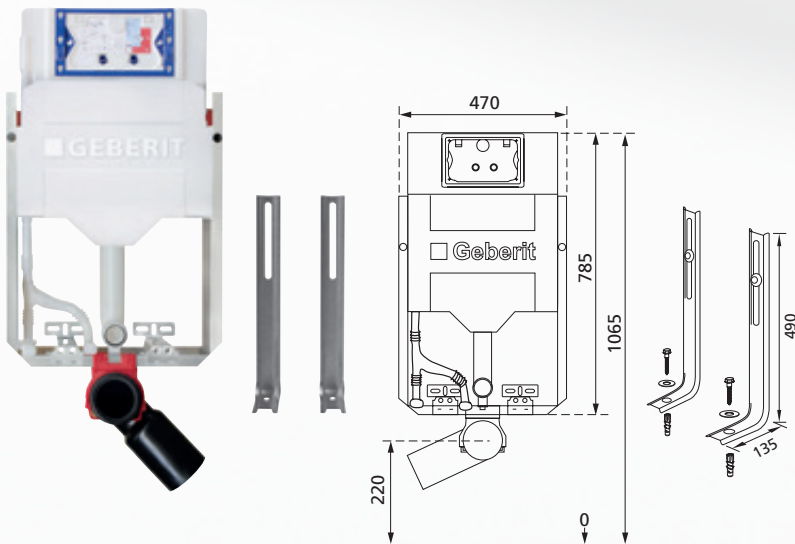

- Mounting unit, galvanised with four fixing points
- Built-in, condensation-insulated concealed cistern
- Ceramic fixing M12, distance 18 or 23 cm
- Drain fastening
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Building protection for the inspection opening
- Water connection 1/2" AG with integrated angle valve
- incl. support brackets

Dimensions: W / H / D 470 / 1065 / 120 mm

**Accessories:**  
Flush plates and flushing systems from page 67  
Support brackets: Page 50


Design	Ref. no.
with Geberit cistern Sigma with 2-quantity flush	511118.01

all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs

WC-racks with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



Kombiset WC Geberit 82,5 cm with concealed cistern

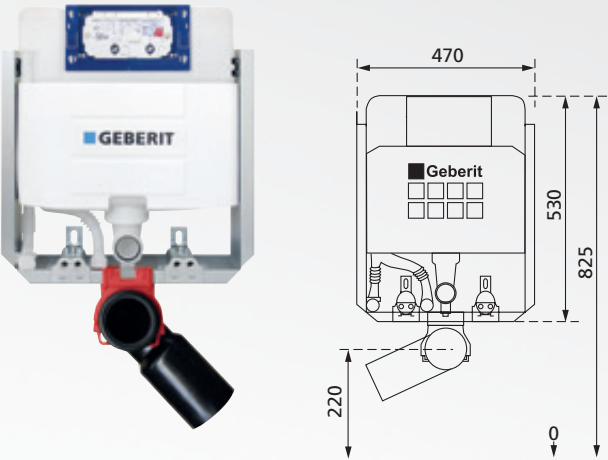

- Mounting unit, galvanised with four fixing points
- Built-in, condensation-insulated concealed cistern Gberit Omega
- Ceramic fixing M12, distance 18 or 23 cm
- Drain fastening
- Connection bend made of PE-HD, DN 90 mm  
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Building protection for the inspection opening
- Water connection 1/2" sink with integrated angle valve

Dimensions: W / H / D 470 / 825 / 140 mm

**Accessories:**  
Flush plates and flushing systems from page 67  
Support brackets: Page 50

**Note:**  
The toilet lid only remains in the open position if the distance between the wall and the toilet lid is > 25 mm.  
When using WC ceramics such as those from Keramag: Renova No. 1, Comprimo 204550, Joly 203060, V&B: Viala 765310, Viala 765210, the flush plate must be installed from above.

Design Ref. no.

Installation height 825 mm

with Geberit cistern Omega 511890.00  
Actuation from the front/top



all WC frames with Geberit cistern:  
compatible with Duravit Sensowash®  
and Geberit AquaClean WCs  
WC-racks with Geberit cistern Sigma:  
additionally compatible with Geberit  
Duo-Fresh inserts (cleaning cubes)



carrying supports  
TS



carrying supports  
TSU

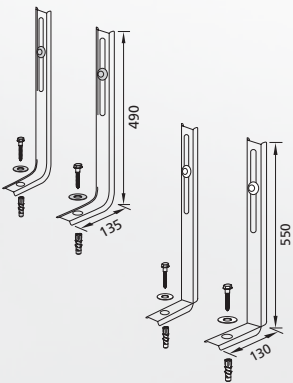

carrying supports TS

Installation aid for free-standing installation of the Kombiset WC elements or to support the load of the WC ceramic appliance.

carrying supports TSV

Installation aid for free-standing installation of the Kombiset WC elements or to support the load of the WC ceramic appliance. However, extended by 100 mm for barrier-free WCs or for raised screed.

carrying supports TSU


Installation aid for free-standing installation of the kombiset urinal elements or to support the load of the urinal ceramic.

Design Ref. no.

- |                               |        |
|-------------------------------|--------|
| carrying supports TS, 1 pair  | 550039 |
| carrying supports TSV, 1 pair | 550022 |
| carrying supports TSU, 1 pair | 550046 |



Kombiset urinal with flush-mounted flush valve or shell set

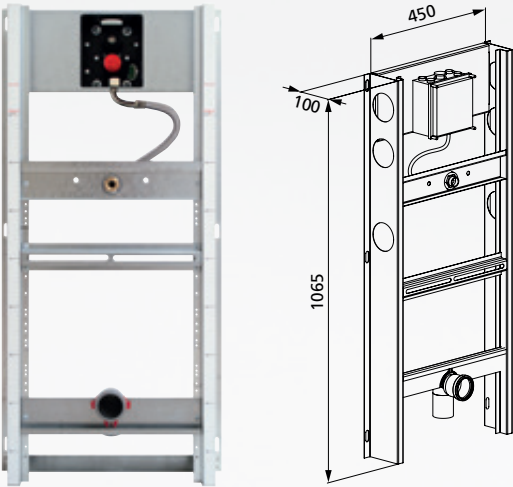

Design	Ref. no.
Burda flush valve U-05/06	542054
Burda flush valve U-05/06 for spray head	542055

Complete pre-assembled installation unit for brickwork made of galvanised steel frame, with fixing material, DN 50 drainage elbow and urinal attachment


- All urinal fastening material
- Drain elbow DN 50
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

Accessories:  
Flushing systems for urinals from page 78



Kombiset urinal with concealed shell set for Flowtronik

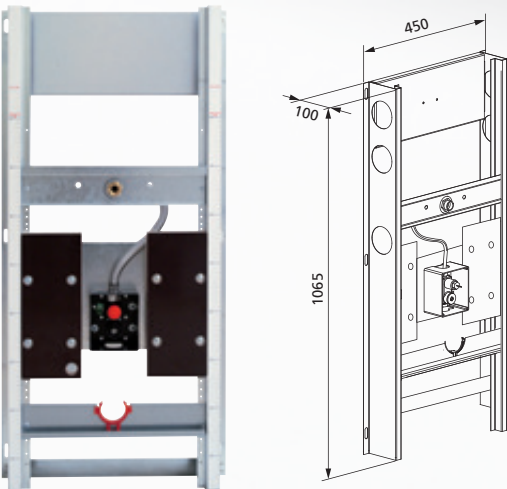

Design	Ref. no.
	540000
for spray head	540001

**Attention!**  
When using a stainless steel urinal please contact our hotline in advance 0211/95001-0 beforehand!

Complete pre-assembled installation unit for brickwork made of galvanised steel frame.

- All urinal fastening material
- Drain elbow DN 50
- Flowtronik shell set with 230V connection
- Valve block and water shut-off
- Functions: Standard and stadium operation, forced flushing
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm


Accessories:  
Flushing systems for urinals from page 88

**Note:**  
Not suitable for urinals with moulded-in suction trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00.





## Kombiset urinal for Geberit Flushcontrol / Duravit Utronic

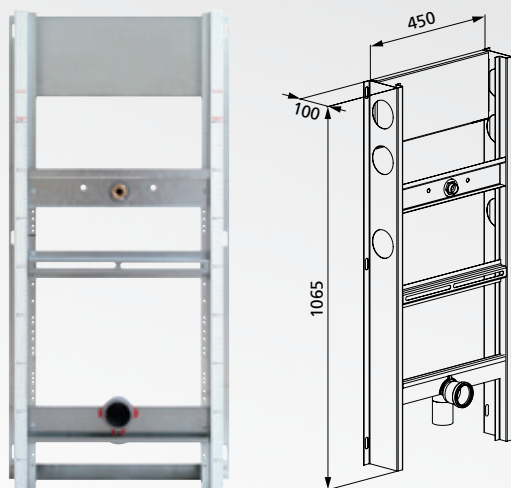

**Complete pre-assembled installation unit for brickwork made of galvanised steel frame.**

- All urinal fastening material
- Drain elbow DN 50
- Electronics or shell set
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

**Note:**

Not suitable for urinals with moulded-in suction trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00.


Design	Ref. no.	Design	Ref. no.
--------	----------	--------	----------

### Installation height 1065 mm

<u>shell set</u>		<u>shell set</u>	
for Geberit Flushcontrol	543121	for Duravit Utronic	543141
for Geberit Flushcontrol for spray head	543122	for Duravit Utronic for spray head	543142



## Kombiset urinal with concealed shell set

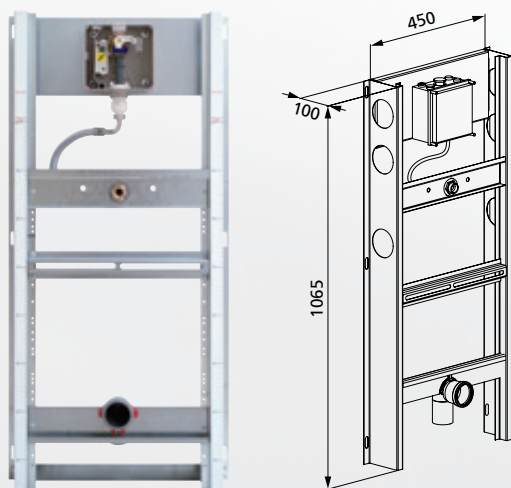

**Complete pre-assembled installation unit for brickwork made of galvanised steel frame.**

- All urinal fastening material
- Drain elbow DN 50
- Electronics or shell set
- Suction trap
- Flexible hose
- Urinal connection set
- Connection 1/2"

Dimensions: W / H / D 450 / 1065 / 100 mm

**Accessories:**

Flushing systems for urinals from page 88

**Note:**

Not suitable for urinals with moulded-in suction trap, e.g. V&B Omnia Pro #7502 00, #7503 00, #7504 00.

Design	Ref. no.	Design	Ref. no.
--------	----------	--------	----------

### Installation height 1065 mm

<u>shell set</u>		<u>version with integrated control unit</u>	
Geberit shell set universal for HyTronic and HyTouch	523623	Burda shell set <u>with</u> infrared electronic BurdaTronic U-09	543112.60
Geberit shell set universal for HyTronic and HyTouch for spray head	523624	Burda shell set <u>with</u> infrared electronic BurdaTronic U-09 for spray head	543114.60





03 – 18

**Santro** Pre-planked prewall system



19 – 52

**BS+** Dry construction system



53 – 56

**Burda-Block** combined wet and dry construction system



57 – 60

**my move elements** Electrically height-adjustable



61 – 66

**Kombiset** Wet construction system



67 – 80

**Flush buttons** Burda Seite 68-73  
Geberit Seite 74-79 Schell Seite 79



81 – 96

**Flushing systems**



# Flush buttons Burda

## Flush button T610



Design	Ref. no.
White	610.00
Polished chrome finish	610.51
Matt chrome finish	610.50

**Suitable for concealed cistern K610**  
**2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**  
210003, 211017, 211021, 211053, 211419, 211500, 211505, 211555, 211945, 211945, 400017, 510003, 610001, 611101, 611131, 611212, 611231, 611411, WC13-35-23, WC22-35-23, WC33-35-21, WC3-35-21, WC5-35-26, WC5-35-27

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T611



Design	Ref. no.
White	611.00
Polished chrome finish	611.51

**Suitable for concealed cistern K610**  
**1-quantity flush, flush/stop, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic/stainless steel

**Suitable for the following elements:**  
210003, 211017, 211021, 211053, 211419, 211500, 211505, 211555, 211945, 211945, 400017, 510003, 610001, 611101, 611131, 611212, 611231, 611411, WC13-35-23, WC22-35-23, WC33-35-21, WC3-35-21, WC5-35-26, WC5-35-27

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T620



Design	Ref. no.	Design	Ref. no.
White	620.00	Polished / Polished chrome finish	620.51
White/Matt chrome finish	620.69	Matt/Matt chrome finish	620.50
White/Polished chrome finish	620.70	Polished chrome finish/White	620.68
		Stainless steel look	620.60

**Suitable for concealed cistern K610**  
**2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**  
210003, 211017, 211021, 211053, 211419, 211500, 211505, 211555, 211945, 211945, 400017, 510003, 610001, 611101, 611131, 611212, 611231, 611411, WC13-35-23, WC22-35-23, WC33-35-21, WC3-35-21, WC5-35-26, WC5-35-27

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T752



Design	Ref. no.
White	752.00
Matt chrome finish	752.50

**Suitable for concealed cistern K750**  
**1-quantity flush, flush/stop, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**

WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23  
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00, 211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T753



Design	Ref. no.
White	753.00
Polished chrome finish	753.51
Matt chrome finish	753.50

**Suitable for concealed cistern K750**  
**2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**

WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23  
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00, 211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T760



Design	Ref. no.
White	760.00
Polished chrome finish	760.51
Matt chrome finish	760.50

**Suitable for concealed cistern K750/K760**  
**2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**


WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23  
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00, 211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



# Flush buttons Burda

## Flush button T770



Design	Ref. no.
White	770.00
Polished chrome finish	770.51
Matt chrome finish	770.50

Suitable for concealed cistern K750/K760  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:  
WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23  
WC33-30-21, 211042.00, 211133.00, 211134.00, 211135.00, 211136.00, 211137.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T780



Design	Ref. no.
Polished chrome finish	780.51

Suitable for concealed cistern K750/K760  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: zinc die casting

Suitable for the following elements:  
WC3-30-21, WC5-30-26, WC5-30-27, WC13-30-21, WC22-30-23  
WC33-30-21, 211042.00, 211133.00, 211134.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T784



Design	Ref. no.	Design	Ref. no.
White/Polished chrome finish/White	784.83	Matt chrome finish / Polished/ Matt chrome finish	784.68
Black/Polished chrome finish/Black	784.84	Polished chrome finish/ Matt/ Polished chrome finish	784.65

Suitable for concealed cistern K770/K845  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:  
WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T785



Design	Ref. no.
Stainless steel	785.60

### Suitable for concealed cistern K770/K845 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: Stainless steel

#### Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T787



Design	Ref. no.	Design	Ref. no.
White/Polished chrome finish/White	787.83	Matt chrome finish / Polished / Matt chrome finish	787.68
Black/Polished chrome finish/Black	787.84	Polished chrome finish / Matt / Polished chrome finish	787.65

### Suitable for concealed cistern K770/K845 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

#### Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T788



Design	Ref. no.
White/Polished chrome finish/White	788.83
Black/Polished chrome finish/Black	788.84

### Suitable for concealed cistern K770/K845 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

#### Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



# Flush buttons Burda

## Flush button T790



Design	Ref. no.	Design	Ref. no.
White	790.00	Matt chrome finish	790.50
Black	790.20	Polished chrome finish	790.51

**Suitable for concealed cistern K770/K845**  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T791



Design	Ref. no.	Design	Ref. no.
White/Polished chrome finish/White	791.83	Matt chrome finish / Polished / Matt chrome finish	791.68
Black/Polished chrome finish/Black	791.84	Polished chrome finish/Matt/ Polished chrome finish	791.65

**Suitable for concealed cistern K770/K845**  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic


**Suitable for the following elements:**

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T795



Design	Ref. no.	Design	Ref. no.
White	795.00	Matt chrome finish	795.50
Black	795.20	Polished chrome finish	795.51

**Suitable for concealed cistern K770/K845**  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.





## Flush button T798



Design	Ref. no.	Design	Ref. no.
White	798.00	Matt chrome finish	798.50
Black	798.20	Polished chrome finish	798.51

### Suitable for concealed cistern K770/K845 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

### Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar..



## Flush button T901 / T902



Design	Ref. no.
White (2-quantity T901)	901.00
White (1-quantity T902)	902.00

### Suitable for concealed cistern K770/K845 2-quantity flush, for actuation from the front (T901) 1-quantity flush, flush/stop, (T902) Successor models of T900

- With mounting frame
- With fastening material
- Material: plastic


### Suitable for the following elements:

WC33-50-21, WC5-50-26, WC5-50-27, WC3-50-21, 220140.00, 211240.00, 211943.00, 211700.00, 211303.00, 211066.00, 211065.00, 211480.00, 211580.00

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



## Flush button T921



Design	Ref. no.
White	921.00
Matt chrome finish	921.50
Polished chrome finish	921.51

### Suitable for concealed cistern K921 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

### Suitable for the following elements:

211456, 523556, 611234, WC3-32-21

Individ. customised imprint on plastic, stainless steel and glass buttons under end number 99 possible at an extra charge. Please send file as vector graphic, eps or similar.



# Flush buttons Geberit

## Flush button Sigma01 Round



Design	Ref. no.
White	551030.00
Matt chrome finish	551030.50
Polished chrome finish	551030.51
and many more	

Suitable for concealed cistern Sigma  
2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:  
211052, 211057, 211088, 211090, 211121, 211148, 211600,  
211606, 211666, 211947, 211948, 220088, 220099, 400018,  
511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21,  
WC33-12-21, WC5-12-26, WC5-12-27



## Flush button Sigma10 Round



Design	Ref. no.	Design	Ref. no.
Plate and button white Design rings polished chrome finish	550037.83	Stainless steel brushed	550037.60
Plate and button black Design rings polished chrome finish	550037.84	and many more	

Suitable for concealed cistern Sigma  
1-quantity flush, flush/stop, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:  
211052, 211057, 211088, 211090, 211121, 211148, 211600,  
211606, 211666, 211947, 211948, 220088, 220099, 400018,  
511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21,  
WC33-12-21, WC5-12-26, WC5-12-27



## Flush button Sigma20 Round



Design	Ref. no.
Plate and button white Design rings polished chrome finish	550028.83
Plate and button black Design rings polished chrome finish	550028.84
Stainless steel brushed	550028.60
and many more	

Suitable for concealed cistern Sigma  
1-quantity flush, flush/stop, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

Suitable for the following elements:  
211052, 211057, 211088, 211090, 211121, 211148, 211600,  
211606, 211666, 211947, 211948, 220088, 220099, 400018,  
511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21,  
WC33-12-21, WC5-12-26, WC5-12-27



## Flush button Sigma20 Square



Design	Ref. no.
Plate and button white Design strips polished chrome finish	550065.83
Plate and button black Design strips polished chrome finish	550065.84
and many more	

### Suitable for concealed cistern Sigma 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

#### Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



## Flush button Sigma50 Square



Design	Ref. no.
Base plate and buttons chrome-plated, cover plate white	550027.00
Base plate and buttons chrome-plated, cover plate black	550027.70

### Suitable for concealed cistern Sigma 2-quantity flush, for actuation from the front

- With mounting frame
- With fastening material
- Material: plastic

#### Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



## Flush button Sigma70 Square



Design	Ref. no.
Brushed stainless steel	550059.60
Glass white	550059.69
Glass black	550059.72

### Suitable for concealed cistern Sigma 2-quantity flush, for actuation from the front

- With mounting frame
- With servo lift, hydraulic
- With water connection set
- With protective plate
- With 2 spacer bolts
- With mounting accessories
- Material: stainless steel / glass


#### Suitable for the following elements:

211052, 211057, 211088, 211090, 211121, 211148, 211600, 211606, 211666, 211947, 211948, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



# Flush buttons Geberit

Slide-in unit for Geberit DuoFresh Stick,  
for Sigma concealed cistern 12 cm

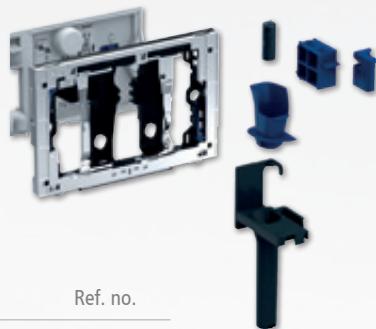

Design	Ref. no.
Polished chrome finish	550035

**For Geberit Sigma concealed cisterns 12 cm  
(from year of manufacture 2008)  
For inserting Geberit DuoFresh Stick without chlorine  
or oxidising componentse**

- for Geberit flush button Sigma01 Round
- for Geberit flush button Sigma10 Round
- for Geberit flush button Sigma20 Round
- for Geberit flush button Sigma20 Square
- for Geberit flush button Sigma50 Square

**Features**  
Actuation from the front  
Geberit DuoFresh Stick can be inserted without tools



Flush button Delta10 Round, screwable



Design	Ref. no.
Stainless steel	550024.60

**Suitable for concealed cistern Delta  
1-quantity flush, flush/stop, for actuation from the front**

- With mounting frame
- With fastening material
- Material: Stainless steel

**Suitable for the following elements:**  
211109, 211222, 511010, 611115, 611157, 611371, 611485,  
WC3-01-21



Flush button Delta15 Round



Design	Ref. no.
White	550026.00
Matt chrome finish	550026.50

**Passend zu UP-Spülkasten Delta  
1-Mengen Spülung Spül / Stopp, für Betätigung von vorne**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Kunststoff

**Passend für folgende Elemente:**  
211109, 211222, 511010, 611115, 611157, 611371, 611485,  
WC3-01-21



## Flush button Delta25 Round



Design	Ref. no.
White	550042.00
Matt chrome finish	550042.50

**Suitable for concealed cistern Delta  
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**  
211109, 211222, 511010, 611115, 611157, 611371, 611485,  
WC3-01-21



## Flush button Delta25 Square



Design	Ref. no.
White	550047.00
Matt chrome finish	550047.50

**Suitable for concealed cistern Delta  
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**  
211109, 211222, 511010, 611115, 611157, 611371, 611485,  
WC3-01-21



## Flush button Delta50 Square



Design	Ref. no.
White	550066.00
Matt chrome finish	550066.50

**Suitable for concealed cistern Delta  
2-quantity flush, for actuation from the front**

- With mounting frame
- With fastening material
- Material: plastic

**Suitable for the following elements:**  
211109, 211222, 511010, 611115, 611157, 611371, 611485,  
WC3-01-21



# Flush buttons Geberit / Schell

## Flush button Omega20 Round



Ausführung	Art.-Nr.	Ausführung	Art.-Nr.
hochglanz verchromt, Designringe matt verchromt	550060.65	weiß, Designringe vergoldet	550060.66
weiß, Designringe hgl. verchromt	550060.83	schwarz, Designringe hgl. verchromt	550060.84

**Passend zu UP-Spülkasten Omega**  
**2-Mengen Spülung, für Betätigung von vorne und oben**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Kunststoff

**Passend für folgende Elemente:**  
211140.00/211390.00/211395.00/611190.00/611290.00  
WC3-26-21



## Flush button Omega20 Square



Ausführung	Art.-Nr.	Ausführung	Art.-Nr.
hochglanz verchromt, Designstreifen matt verchromt	550061.65	weiß, Designstreifen vergoldet	550061.66
weiß, Designstreifen hgl. verchromt	550061.83	schwarz, Designstreifen hgl. verchromt	550061.84

**Passend zu UP-Spülkasten Omega**  
**2-Mengen Spülung, für Betätigung von vorne und oben**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Kunststoff

**Passend für folgende Elemente:**  
211140.00/211390.00/211395.00/611190.00/611290.00  
WC3-26-21



## Betätigungsplatte Omega60 Square



Ausführung	Art.-Nr.	Ausführung	Art.-Nr.
verchromt gebürstet, Designstreifen und Rahmen hgl. verchromt	550062.87	Omega60 Abdeckrahmen verchromt gebürstet	550064.87
Taste: Glas weiß, Designstreifen: verspiegelt, Rahmen: hgl. verchromt	550062.69		

**Passend zu UP-Spülkasten Omega**  
**2-Mengen Spülung, für Betätigung von vorne**

- mit Befestigungsrahmen
- mit Befestigungsmaterial
- Werkstoff: Zinkdruckguss

**Passend für folgende Elemente:**  
211140.00/211390.00/211395.00/611190.00/611290.00  
WC3-26-21



## Geberit cover plate Omega



Design	Ref. no.
Glass white	550063.69

### Suitable for concealed cistern Omega 2-quantity flush

- With mounting frame
- With fastening material
- Material: zinc die casting

### Suitable for the following elements:

211140.00/211390.00/211395.00/611190.00/611290.00  
WC3-26-21



## Flush button Schell Edition



Design	Ref. no.
Plastic, alpine white	550070.00
Stainless steel	550070.60

### Suitable for WC flush valve Compact Flush plate with push button 1-quantity flush, flush/stop

- With mounting frame,
- With self-closing plastic cartridge
- With automatic nozzle cleaning needle







03 – 18

**Santro** Pre-planked prewall system



19 – 52

**BS+** Dry construction system



53 – 56

**Burda-Block** combined wet and dry construction system



57 – 60

**my move elements** Electrically height-adjustable



61 – 66

**Kombiset** Wet construction system



67 – 80

**Flush buttons**



81 – 96

**Flushing systems**

WC Burda page 82  
WC Geberit page 82-87

Urinal Burda Seite 88-89  
Urinal Geberit Seite 90-96



# Flushing systems wc

Burda WC control unit suitable for Burda cistern K770 manual / for folding support rails with radio transmission

for mains operation



Flush control for retrofitting or new installation in public or private areas. Suitable for Burda K770 cisterns. Triggered either manually using an actuation button with dual flush or wirelessly via radio transmission using a folding support handle.

Suitable for the following elements:  
211065, 211066, 211140, 211149, 211240, 211303, 211330, 211700, 211943, 220140, WC3-50-21, WC5-50-26, WC5-50-27, WC33-50-21

- Radio activation via folding support handles
- Hygienic flush adjustable (1-148 hours factory setting, 24 hours can be changed via app for Android)
- Flush duration (factory setting 7 sec. can be changed via app for Android)
- Test flush (can be triggered via app for Android)
- Triggering via manual flush plate 2 quantity possible


**Note:**  
The sink settings app for Android is available at:  
[service@burda-online.com](mailto:service@burda-online.com)



Design	Ref. no.
Burda WC control unit, screwable for Burda concealed cistern K770	
Button: white	T690.00
Button: stainless steel	T690.60

Geberit WC control unit Sigma10 Round, screwable automatic / touchless / manual

for mains operation

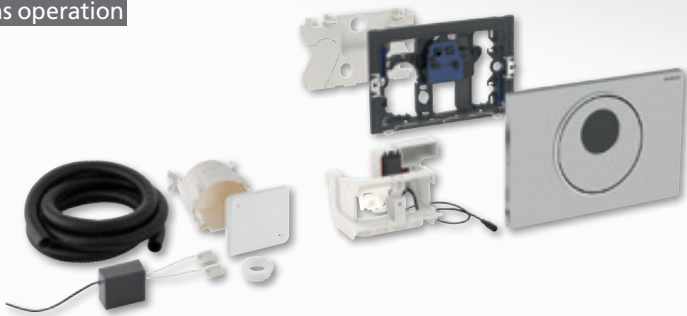

Vandal-proof flush control for retrofitting or new installation for public and private areas. Suitable for Geberit Sigma concealed cisterns. Activation is automatic / contactless / manual via an infrared sensor as well as by hand as a 1-quantity or 2-quantity flush.

Suitable for the following elements:  
211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27


**Note:**  
The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.



Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable for Geberit Sigma	
Plate and button: brushed Design ring: polished	505436
Geberit shell set for WC control with electrical flush release	505441

## Geberit WC control unit Sigma10 Round, screwable automatic / contactless

for mains operation

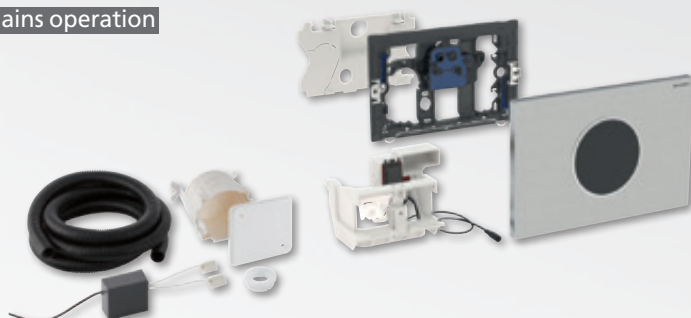

Design	Ref. no.
Burda WC control unit Sigma10 Round, screwable for Geberit Sigma	
Plate: brushed Design ring: polished	505434
Geberit shell for WC control with electrical flush release	505441

**Vandal-proof flush control for retrofitting or new installation for public and private areas.**

**Suitable for Geberit Sigma concealed cisterns.**

Triggering is automatic / contactless / manual via an infrared sensor as well as manually as a 1-quantity or 2-quantity flush.

**Suitable for the following elements:**

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27


### Note:

The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.



## Geberit WC control unit Sigma10 Round automatic / contactless

for mains operation

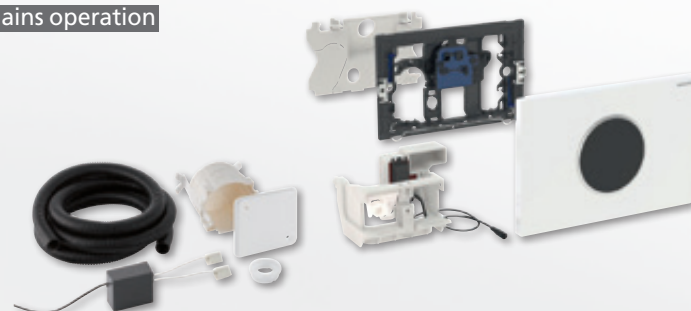

Design	Ref. no.	Design	Ref. no.
Geberit WC control unit, Sigma10 Round for Geberit Sigma		Plate: matt chrome finish Design ring: polished chrome finish	505431.68
Plate: brushed Design ring: polished	505431.00	Plate: white Design ring: polished chrome finish	505431.83
Plate: polished chrome finish Design ring: matt chrome finish	505431.65	Geberit shell set for WC control with electrical flush release	505441
Plate: white Design ring: gold-plated	505431.66		
Plate: black Design ring: polished chrome finish	505431.84		

**Vandal-proof flush control for retrofitting or new installation for public and private areas.**

**Suitable for Geberit Sigma concealed cisterns.**

Triggering is automatic / contactless via an infrared sensor as well as by approaching with the hand as a 1-quantity or 2-quantity flush.

**Suitable for the following elements:**

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

### Note:

The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.



# Flushing systems wc

## Geberit WC control unit Sigma10 Round, screwable manual / for folding support rails

for mains operation



Design	Ref. no.	Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable for Geberit Sigma			
Plate and button: brushed Design ring: polished	505430	Geberit shell set for WC control with mechanical flush release	505541
Geberit shell set for WC control with electrical flush release	505441		

Vandal-proof flush control for retrofitting or new installation for public and private areas.  
Suitable for Geberit Sigma concealed cisterns.  
The flush is triggered manually as a 1-quantity flush or via a wired support handle


Suitable for the following elements:  
211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

**Note:**  
The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.



## Geberit WC control unit Sigma10 Round Manual / for folding support rails with radio transmission

for mains operation

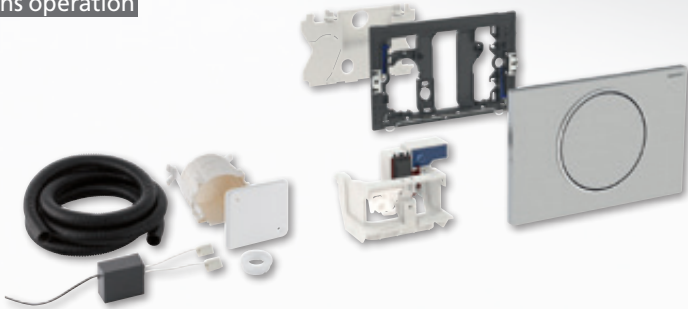

Design	Ref. no.	Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable Radio release for Geberit Sigma			
Plate and button: brushed Design ring: polished	505428		
Geberit shell set for WC control with electrical flush release	505441		

Vandal-proof flush control for retrofitting or new installation for public and private areas.  
Suitable for Geberit Sigma concealed cisterns.  
The flush is triggered manually as a 1-quantity flush or wirelessly via a folding support handle.

Suitable for the following elements:  
211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

**Note:**  
The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.  
Der Abstand vom Sender darf innerhalb eines Raums 10 m nicht überschreiten. Kann mit Geberit-Taster für Spülauslösung (Funk) Art.-Nr. 505 425 kombiniert werden.



## Geberit WC control unit Sigma80 Square, lockable contactless



**Vandal-proof flush control for retrofitting or new installation for public and private areas.**

**Suitable for Geberit Sigma concealed cisterns.**

The flush is triggered as a 1-quantity flush without contact or via an external button.

**Suitable for the following elements:**

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

### Note:


The distance between the mains transformer and the WC control unit including the extension cable, must not exceed 4 metres; Larger distances only after consultation with Geberit.

Design	Ref. no.
Geberit WC control, Sigma80 Square, lockable for Geberit Sigma	
Black glass	505429
Geberit shell set for WC control with mechanical flush release	505441
Connection cable to Geberit Flush button Sigma80	505542



## Geberit WC control unit Sigma10 Round, screwable automatic / contactless / manual

**for battery operation**

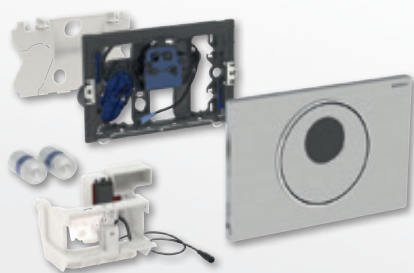

**Vandal-proof flush control for retrofitting or new installation for public and private areas.**

**Suitable for Geberit Sigma concealed cisterns.**

Triggering is automatic / contactless via an infrared sensor as well as manually as a 1-quantity or 2-quantity flush.

**Suitable for the following elements:**

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27


Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable for Geberit Sigma	
Plate and button: brushed Design ring: polished	505433



# Flushing systems wc

Geberit WC control unit Sigma10 Round, screwable  
automatic / contactless

for battery operation

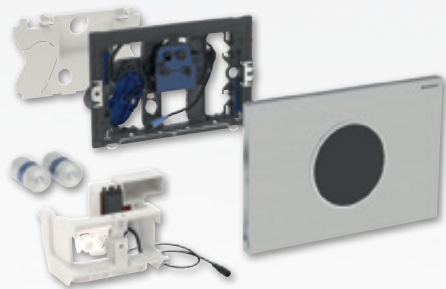

Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable for Geberit Sigma	
Plate: brushed Design ring: polished	505432

Vandal-proof flush control for retrofitting or new installation  
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless, via an infrared sensor  
or by approaching the flush with the hand as a 1-quantity or  
2-quantity flush.


Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666,  
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,  
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27



Geberit WC control unit Sigma10 Round  
automatic / contactless

for battery operation

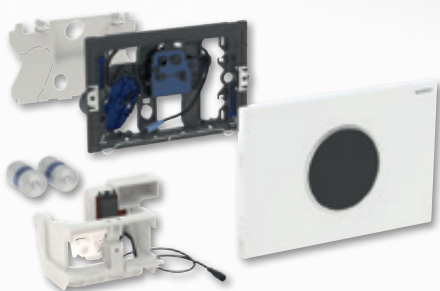

Design	Ref. no.
Geberit WC control, Sigma10 Round for Geberit Sigma	
Plate: brushed Design ring: polished	505427.00
Plate: polished chrome finish Design ring: matt chrome finish	505427.65
Plate: white Design ring: gold-plated	505427.66

Vandal-proof flush control for retrofitting or new installation  
for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

Triggering is automatic / contactless, via an infrared sensor  
or by approaching the flush with the hand as a 1-quantity or  
2-quantity flush.

Suitable for the following elements:


211088, 211090, 211121, 211148, 211600, 211606, 211666,  
220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23,  
WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27





## Geberit WC control unit Sigma10 Round Manual / for folding support rails with radio transmission

for battery operation

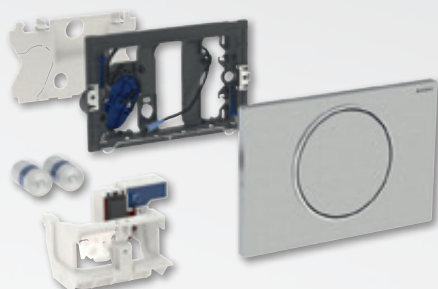

Design	Ref. no.
Geberit WC control, Sigma10 Round, screwable Radio triggering for Geberit Sigma	
Plate and button: brushed Design ring: polished	505426

## Geberit radio button for electronic flush actuation

for battery operation



Design	Ref. no.
Battery operation	505425

Vandal-proof flush control for retrofitting or new installation for public and private areas.

Suitable for Geberit Sigma concealed cisterns.

The flush is triggered manually as a single flush or wirelessly by radio transmission via a folding support handle.

Suitable for the following elements:

211088, 211090, 211121, 211148, 211600, 211606, 211666, 220088, 220099, 400018, 511109, 511116, 511118, WC13-12-23, WC22-12-23, WC3-12-21, WC33-12-21, WC5-12-26, WC5-12-27

### Note:

The distance from the transmitter must not exceed 10 m within a room. Can be combined with Geberit push-button for flush actuation (radio) item no. 505 425.




For manual, wireless flush actuation for Geberit Sigma concealed cistern via electronic Geberit WC control unit.



# Flushing systems urinal

## Burda Flowtronik

for mains operation

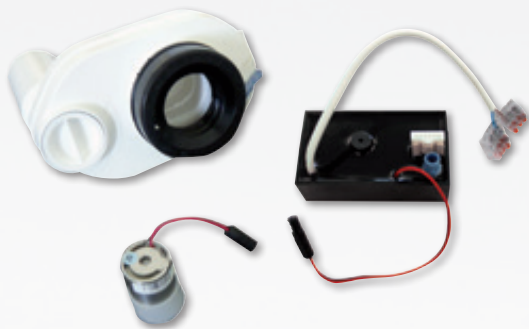

**Concealed urinal flush control with trap sensor, programmable via Android App 230 V, ready-to-install set**

- consisting of:**
- Electronics box
  - Solenoid valve
  - Trap sensor

Design	Ref. no.
	214854



## BurdaTronic U-06 Manual operation



- With front panel and lever handle
- With cartridge
- With mounting frame
- With flush cartridge

**Suitable for the following elements:**  
214029, 214030, 542054, 542055, 641694, UR3-36-59 M

Design	Ref. no.
White	505450.00
Polished chrome finish	505450.50
Stainless steel	505450.60



## BurdaTronic U-09

for mains operation



Design	Ref. no.
BurdaTronic U-09 Opto-electronics	
230 V, stainless steel	505455.60

### BurdaTronic U-09, Opto-electronics

- Flush button incl. mounting frame and sensor
- Travo 230 V
- Solenoid valve incl. adapter
- Remote control


**Suitable for the following elements:**  
214889 und 214989



# Flushing systems urinal

## Geberit urinal flush control, cover plate type 01 Round

for mains operation

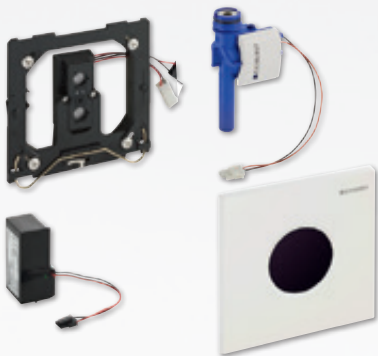

- With front panel
- With mounting frame
- Integrated electronics, 230 V


Suitable for the following elements:  
647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design	Ref. no.
White alpine, zinc die casting	505457.00
Polished chrome finish, zinc die casting	505457.51
Matt chrome finish, zinc die casting	505457.50



## Geberit urinal flush control, cover plate type 10 Round

for mains operation

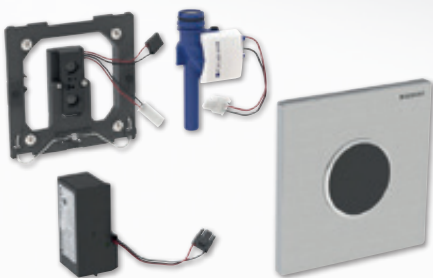

- With front panel
- With mounting frame
- Integrated electronics, 230 V


Suitable for the following elements:  
647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design	Ref. no.	Design	Ref. no.
Plate: brushed Design ring: polished	505458.00	Plate: white Design ring: matt chrome finish	505458.85
Plate: polished chrome finish Design ring: matt chrome finish	505458.65	Plate: black Design ring: polished chrome finish	505458.84
Plate: white Design ring: polished chrome finish	505458.83	Plate: matt chrome finish Design ring: polished chrome finish	505458.68
Plate: white Design ring: gold-plated	505458.66		



## Geberit urinal flush control, cover plate type 50 Square

### for mains operation

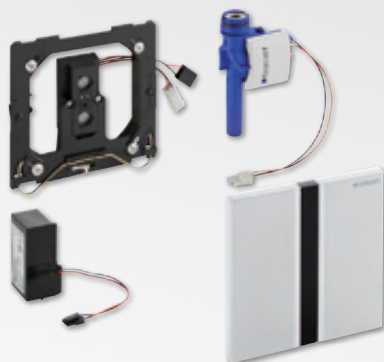

- With front panel
- With mounting frame
- Integrated electronics, 230 V

#### Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design

Ref. no.


Brushed chrome,  
Zinc die casting

505462.87



## Geberit urinal flush control, cover plate type 50 Square

### for battery operation

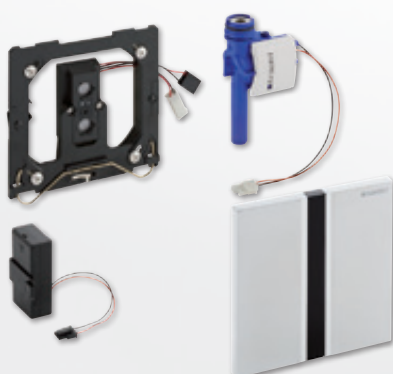

- With front panel
- With mounting frame
- Integrated electronics, battery operation

#### Suitable for the following elements:

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59

Design

Ref. no.

Brushed chrome,  
Zinc die casting

505423.87



# Flushing systems urinal

## Geberit urinal flush control concealed

for mains operation



Design	Ref. no.
	505435

- 230 V ready-to-install set


Suitable for the following elements:  
on request

Accessories:  
Geberit service mobile phone, page 94



## Geberit urinal flush control Basic

for mains operation

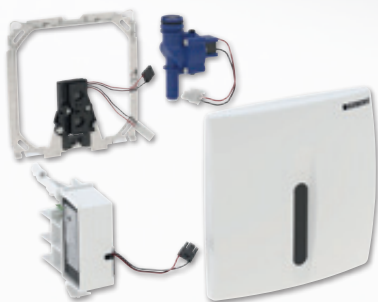

Design	Ref. no.
White alpine, plastic	505464.00
Matt chrome finish, plastic	505464.50

- With front panel
- With mounting frame
- Integrated electronics, 230 V


Suitable for the following elements:  
647562, 214702, UR3-87-59, 523613

Accessories:  
Geberit service mobile phone, page 94



## Geberit urinal flush control, cover plate type 01 Round

**for battery operation**

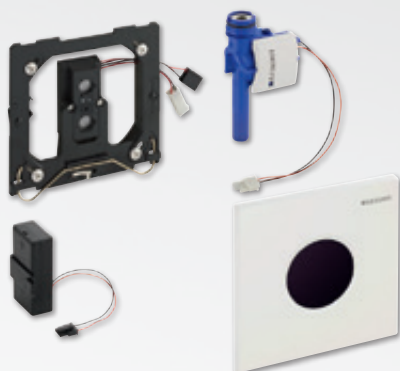

Design	Ref. no.
White alpine, Zinc die casting	505463.00
Polished chrome finish, Zinc die casting	505463.51
Matt chrome finish, Zinc die casting	505463.50

- With front panel
- With mounting frame
- Integrated electronics, battery operation


**Suitable for the following elements:**

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59



## Geberit urinal flush control, cover plate type 10 Round

**for battery operation**

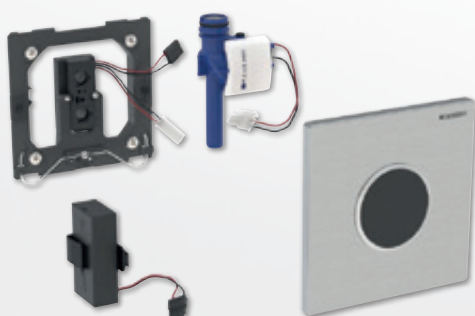

Design	Ref. no.	Design	Ref. no.
Plate: brushed Design ring: polished	505466.00	Plate: white Design ring: matt chrome finish	505466.85
Plate: polished chrome finish Design ring: matt chrome finish	505466.65	Plate: black Design ring: polished chrome finish	505466.84
Plate: white Design ring: hgl. verchromt	505466.83	Plate: matt chrome finish Design ring: polished chrome finish	505466.68
Plate: white Design ring: gold-plated	505466.66		

- With front panel
- With mounting frame
- Integrated electronics, battery operation

**Suitable for the following elements:**

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59






# Flushing systems urinal

## Geberit urinal flush control replacement set

for mains or battery operation

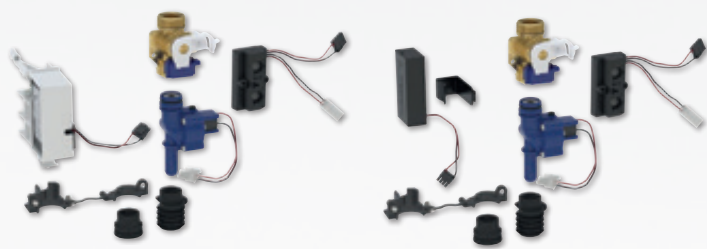

Design	Ref. no.
for main operation	505475
for battery operation	505476

for converting existing Geberit urinal flush controls with mains or battery operation, cover plate 160 x 160 mm  
Item no. 115.802.xx.x, 115.825.00.1, 115.837.00.1, 115.818.xx.x  
for automatic flush actuation of urinals

Not suitable for converting urinals with a spray head



Batteriebetrieb



Netzbetrieb

## Geberit service mobile phone



Design	Ref. no.
service mobile phone	505477

**Geberit service mobile phone**  
For entering and querying the settings of various electronic Geberit products such as washstand taps, WC and urinal flush controls and sanitary flushes.



## Geberit urinal flush control, flush button type 01 Round

with pneumatic flush actuation



Design	Ref. no.
White alpine, plastic	505469.00
Polished chrome finish, plastic	505469.51
Matt chrome finish, plastic	505469.50

- With front panel
- With mounting frame
- With pneumatic valve

**Suitable for the following elements:**

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59



## Geberit urinal flush control, flush button type 10 Round

with pneumatic flush actuation



Design	Ref. no.	Design	Ref. no.
Brushed stainless steel / Polished /brushed	505470.00	White / Matt chrome finish / Matt chrome finish	505470.85
Polished chrome finish / matt / Polished chrome finish	505470.65	Black / Polished chrome finish / Black	505470.84
White / Polished chrome finish / White	505470.83	Matt chrome finish / Polished chrome finish / Matt chrome finish	505470.68
White / Gold-plated / White	505470.66		

- With front panel
- With mounting frame
- With pneumatic valve

**Suitable for the following elements:**

647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59




# Flushing systems urinal

## Geberit urinal flush control, flush button type 50 Square

with pneumatic flush actuation

Spezialanfertigung

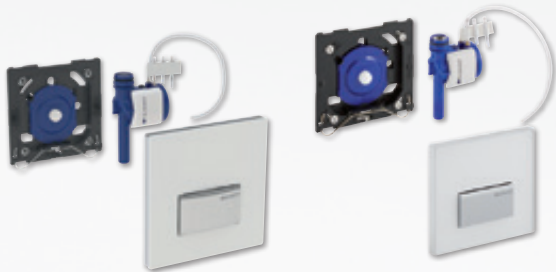

Design	Ref. no.	Design	Ref. no.
White alpine, Zinc die casting, Plastic	505471.00	Glass lava, Zinc die casting, Glass	505471.04
Chrome brushed, Zink die casting, Chromed brass	505471.01	Glass sand grey, Zinc die casting, Glass	505471.05
Deep black RAL 9005, Zinc die casting, Plastic	505471.02		
Smoked glass mirrored, Zinc die casting, Glass	505471.03		

- With front panel
- With mounting frame
- With pneumatic valve

Suitable for the following elements:  
647572, 647584, 214712, 214713, 523623, 543131, UR3-85-59



## Geberit urinal flush control, flush button type 50 Round

with pneumatic flush actuation



Design	Ref. no.
White alpine, Plastic	505474.00
Matt chrome finish, Plastic	505474.50

- With front panel
- With mounting frame
- With pneumatic valve

Suitable for the following elements:  
647562, 214702, 523613, UR3-87-59







**burda**  
Sanitärtechnik

Herbert Burda GmbH  
Krefelder Straße 87  
40549 Düsseldorf

tel. +49 211 95001-0  
fax. +49 211 500575

[www.burda-online.com](http://www.burda-online.com)