

03 – 12

Santro

WC washstand page 06-07
page 08

Intermediate support page 08
subcarrier page 09

Fitting plate page 10
Accessories page 10-11



13 – 46

BS+ Dry construction system



47 – 50

Burda-Block combined wet and dry construction system



51 – 54

my move elements Electrically height-adjustable



55 – 60

Kombiset Wet construction system



61 – 74

Flush buttons




75 – 90

Flushing systems




Material requirement for the front wall installation of SANTRO

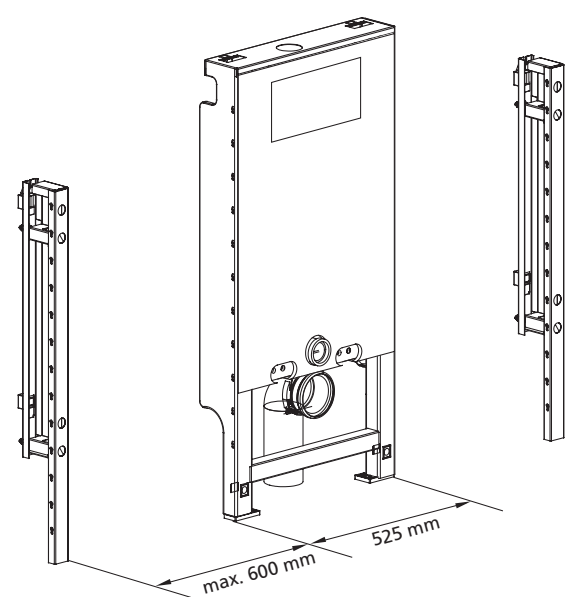


Number of modules	Front wall width upto 1080 mm	Front wall width upto 1600 mm	Front wall width upto 2200 mm	Front wall width upto 2800 mm	Front wall width upto 3400 mm
0	3 subcarrier 3 panels	4 subcarrier 4 panels	5 subcarrier 5 panels	6 subcarrier 6 panels	7 subcarrier 7 panels
1	2 subcarrier 1 panel	2 subcarrier 3 panels	3 subcarrier 3 panels	4 subcarrier 4 panels	5 subcarrier 5 panels
2		2 subcarrier 2 panels	2 subcarrier 3 panels	2 subcarrier 3 panels	4 subcarrier 4 panels

Material requirement for the front wall installation of SANTRO
with nest element for pipelines, shower or bathtub

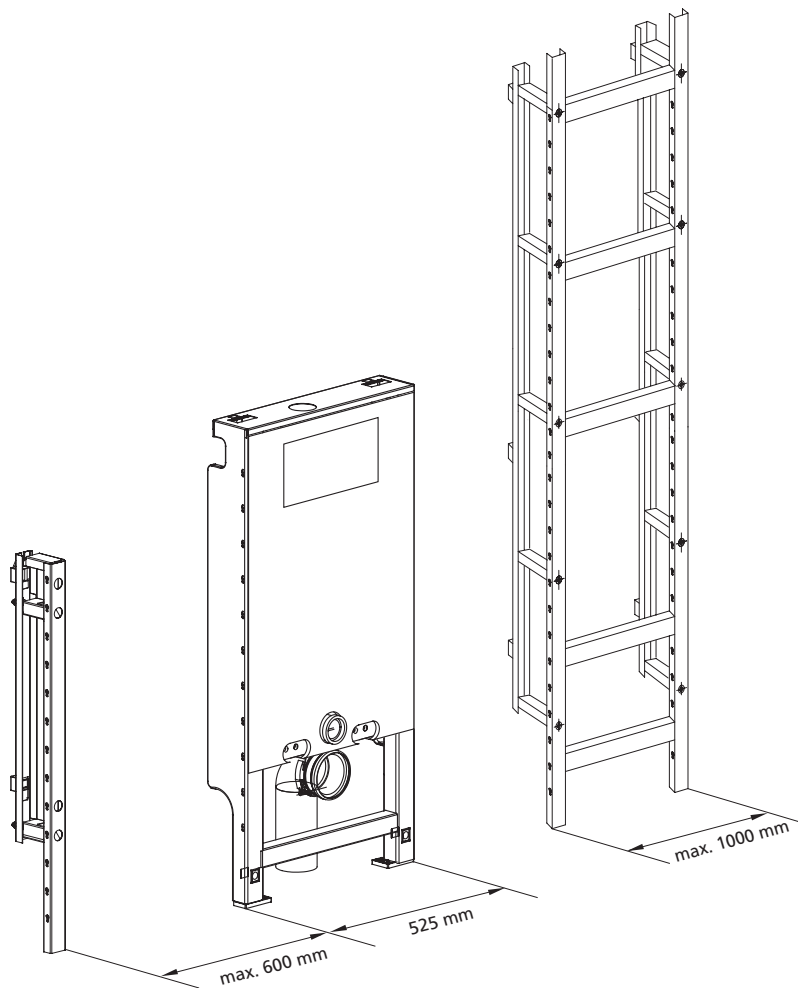

Number of modules	Front wall width 1200-2600 mm	Front wall width 2200-3600 mm
0	1 Nesting element 2 subcarrier 7 panels	1 Nesting element 3 subcarrier 8 panels
1		1 Nesting element 3 subcarrier 8 panels

Santro Wall-WC module with concealed cistern

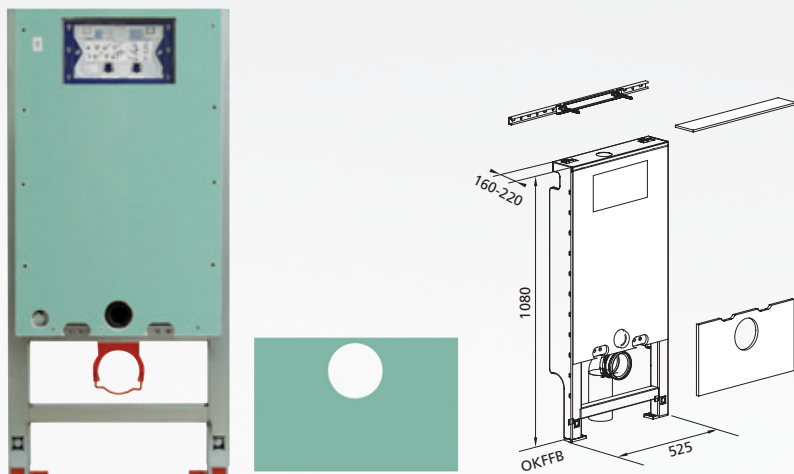

Design _____ Ref. no. _____

Geberit cistern Sigma
with 2-quantity flush

Installation height 1080 mm 611113.01

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front

Dimensions: W / H / D 525 / 1080 / 160-220 mm

Accessories:

Flush plates from page 61


Note: WC power bearing for WC ceramics with contact surface smaller than 17 cm (e.g. Flaminia, Sentique), page 7

all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:
also compatible with Geberit Duo-Fresh
inserts (cleaning cubes)



Santro wall-hung WC module with concealed cistern (825 mm)

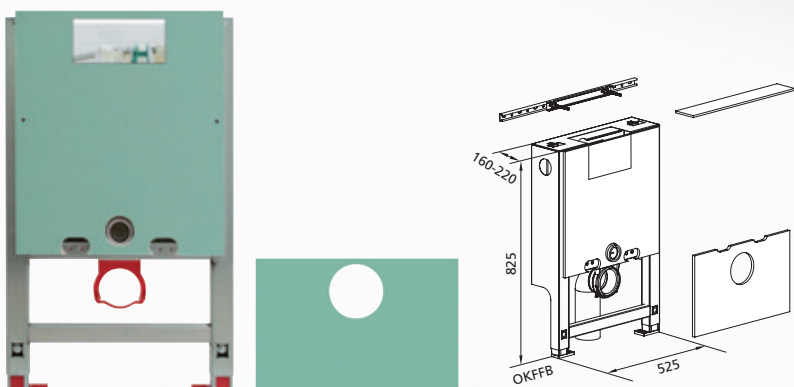

Design _____ Ref. no. _____

Geberit cistern Omega
with 2-quantity flush

Installation height 825 mm 611190.00

- Galvanised, self-supporting and sound-decoupled steel construction
- Reduced shelf height
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front or top

Dimensions: W / H / D 525 / 825 / 160-220 mm

Accessories:

Flush plates from page 61

Note:
The toilet lid only remains in the open position if the distance between the wall and the wall to the toilet lid is > 25 mm.
When using WC ceramics such as those from Keramag: Renova Nr. 1, Comprimo 204550, Joly 203060, V&B: Viala 765310, Viala 765210, the flush plate must be mounted from above.


Note:
WC power bearing for WC ceramics with a support surface smaller than 17 cm (e.g. Flaminia, Sentique), page 7

all WC frames with Geberit cistern:
compatible with Duravit Sensowash®
and Geberit AquaClean WCs

WC frames w. Geberit cistern Sigma:
also compatible with Geberit Duo-Fresh
inserts (cleaning cubes)



Santro WC complete kit with concealed cistern for guest WC single unit up to 1250 cm wide

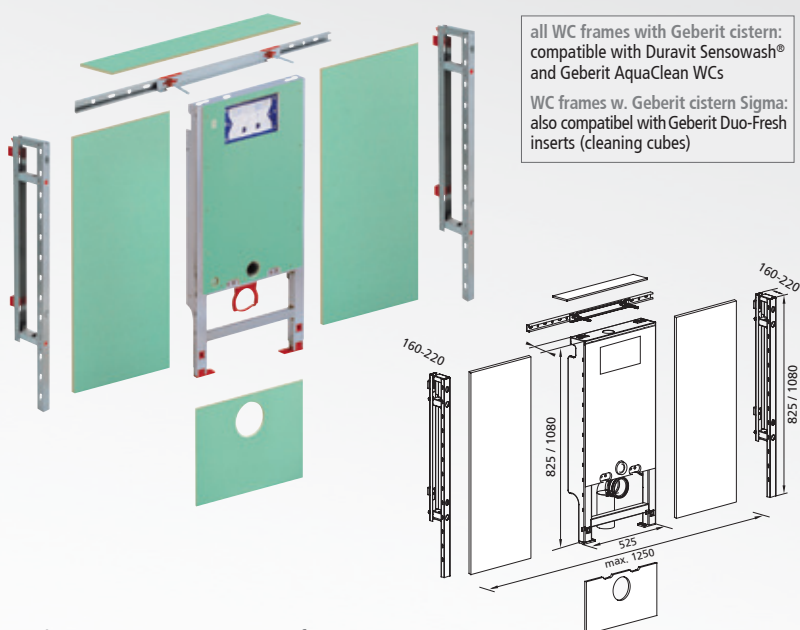

Design Ref. no.

Geberit cistern Sigma
with 2-quantity flush
Actuation from the front

Installation height 1080 mm 611250.01

Geberit cistern Omega
with 2-quantity flush
Actuation from the front or top

Installation height 825 mm 611290.00

Consisting of: 1 x WC element suitable for standard wall-hung WCs

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- WC ceramic fixtures 180 and 230 mm
- Connection elbow made of PE-HD, DN 90 mm
- Incl. transition sleeve made of PE-HD, DN 90/110 mm
- Wall-mounted WC connection set
- Built-in, condensation-insulated concealed cistern
- Building protection for inspection opening
- Building plug for inlet and outlet pipe
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- Cistern connection with integrated or separate angle valve
- Actuation from the front or front/top

Dimensions: H / D 850 oder 1080 / 160-220 mm
Suitable for single WC system (guest WC) max. width 1250 cm

Accessory pack included (separate accessory pack):

2 x subcarrier

For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules etc.

2-tlg. GKFI construction panel

450 mm wide, core-impregnated, fibre-reinforced plasterboard

Accessories optional:

Flush plates from page 61

Note:

WC power bearing for WC ceramics
with contact surface smaller than 17 cm
(e.g. Flaminia, Sentique), page 7



Santro / BS+ WC support brackets for WC ceramics with small contact surface




Design Ref. no.

1 pair 216400

For additional support
of WC ceramics
Support surfaces smaller than 17 cm
(e.g. Flaminia, Sentique)



Santro attachment set for support and folding support rails

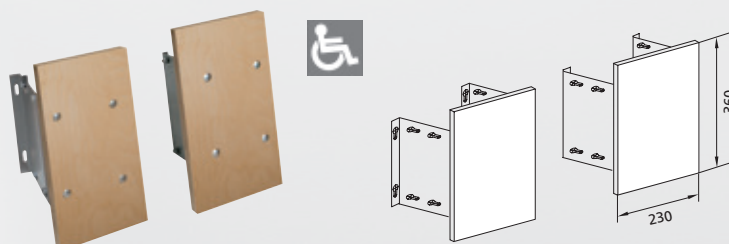

Design Ref. no.


1 pair
with 2 wall mountings 697155

- verzinkte, verwindungssteife Blechkonstruktion
- Befestigungsplatte für variable Armhebelbefestigungsmontage aus Schichtholz
- gesamtes Befestigungs- und Montagezubehör.

Passend für Module
in barrierefreier Ausführung



Santro washstand module for floor-standing fitting

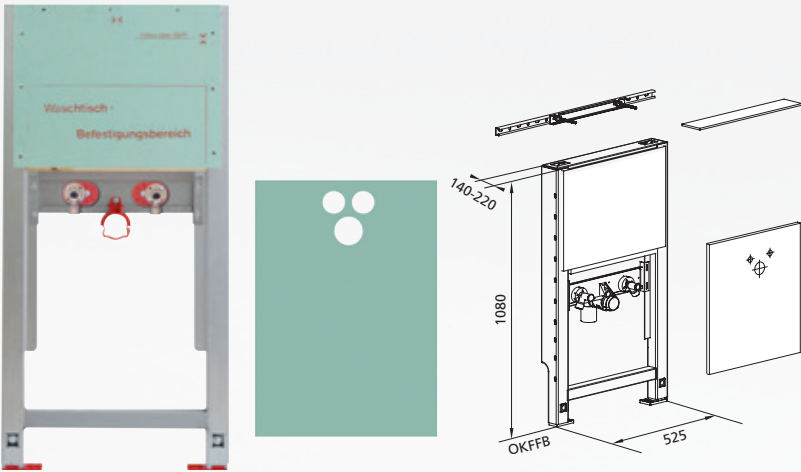

- Galvanised, self-supporting and sound-decoupled steel construction
- Single-layer (12.5 mm) GKFI construction panel, incl. all standard openings
- Sound-decoupled mounting rail
- Mounting plate for variable washstand installation
- Swivelling, depth-adjustable DN 50 urinal trap
- Rubber nipple 32 mm
- All fastening and mounting accessories
- Adjustable foot supports 0-220 mm
- 2 sound-decoupled, width-adjustable 1/2" wall discs


Dimensions: W / H / D 525 / 1080 / 140-220 mm

Design	Ref. no.	Design	Ref. no.
for floor-standing fitting		with built-in tap plate for Connection of an water heater	
Installation height 1080 mm	621258.00	Installation height 1080 mm	622026.00



Santro shaft element for drywall construction and pre-wall

Santro shaft element

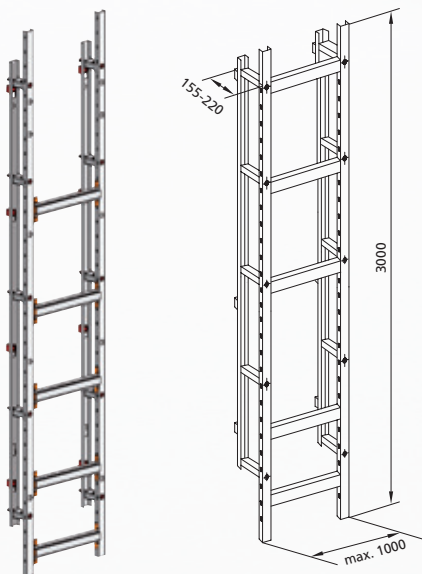


Design	Ref. no.	Design	Ref. no.
Type 190 1000 / 3000 / 155-220 mm	677057	Type 135 for reduced installation depth 1000 / 3000 / 135-160 mm	677040

For cladding shafts and pipe runs as well as for mounting fitting plates



Santro subcarrier for shelf depth 190-220 mm

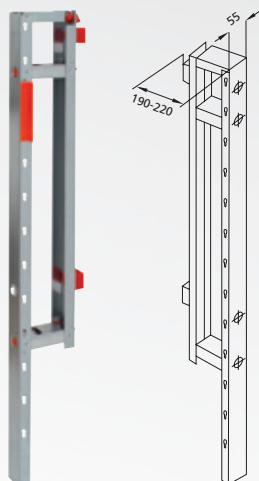


Design	Ref. no.	Design	Ref. no.
Type 108 Installation height 1080 mm Installation depth 190-220 mm	667409	Type 125 Installation height 1250 mm Installation depth 190-220 mm	667423
Type 85 Installation height 850 mm Installation depth 190-220 mm	667416	Type 60 Installation height 600 mm Installation depth 190-220 mm	667520

For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules, etc.
Also suitable for fitting plates, Frame for installation rail (using spacer rails 677 034), adjustable in depth, can be used both left and right usable

- Galvanised, sound-decoupled steel construction
- All fixing and installation accessories



Santro subcarrier for shelf depth 135-160 mm

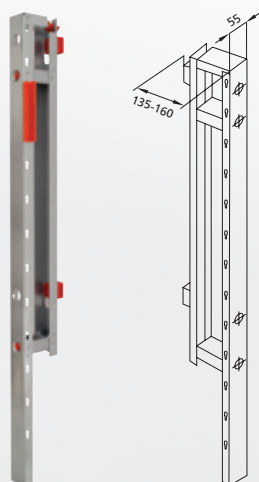

Design	Ref. no.
Type 108 S Installation height 1080 mm	667430
Type 85 Installation height 850 mm	667447
Type 125 Installation height 1250 mm	667454


For extending an extension section and for bridging distances over 625 mm wide between 2 sanitary modules, etc.
Also suitable for fitting plates, Frame for installation rail (using spacer rails 677 034),
Adjustable in depth, can be used both left and right

- Galvanised, sound-decoupled steel construction
- All fixing and installation accessories



Santro Fitting plates and accessories

Santro fitting plate E2 for washing machine inlet and outlet

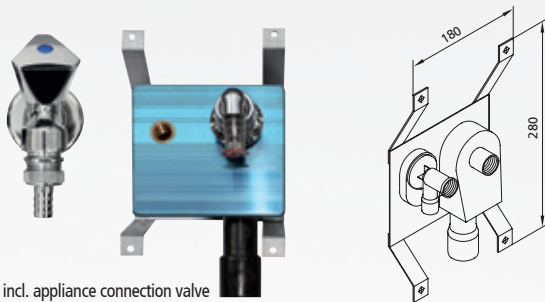

incl. appliance connection valve

Design	Ref. no.
	681771

For mounting using spacer rails (677 034) between 2 sanitary modules or between module and intermediate support or only between intermediate supports or in a shaft element.

- Galvanised steel construction
- 1 wall disc 1/2"
- Concealed odour trap
- complete mounting and assembly accessories



Santro GKFI building board



Design	Ref. no.
W x H x D	
624 x 1075 x 12,5 mm	697024
598 x 1300 x 12,5 mm	697000

Core-impregnated, fibre-reinforced plasterboard



Santro installation frame for instantaneous water heaters



Design	Ref. no.
with frame 30 cm	400135

Santro mounting frame

- Galvanised, self-supporting and sound-decoupled steel construction
- Installation frame, incl. building protection
- 2 wall ducts 1/2'
- without cabinet element



Santro construction screws



100 pieces in a box.

For GKFI building boards, self-drilling

Design	Ref. no.
for single-layer panelling 3,5 x 25 mm	697338
for double panelling 3,5 x 35 mm	697345



Santro construction screws



100 pieces in a box.

Self-drilling, for shaft elements,
intermediate beams, etc.

Design	Ref. no.
4,8 x 16 mm	697536
4,8 x 19 mm	697537



Santro wall mounting rail



For continuous mounting of modules etc.

Design	Ref. no.
1080 mm	697048

