


BS+ WC element for children's and toddler's floor standing WC, 98 cm with concealed cistern Burda K770 for front actuation, for dual flush.

Sound-insulated with optional premium wall brackets for pre-wall mounting

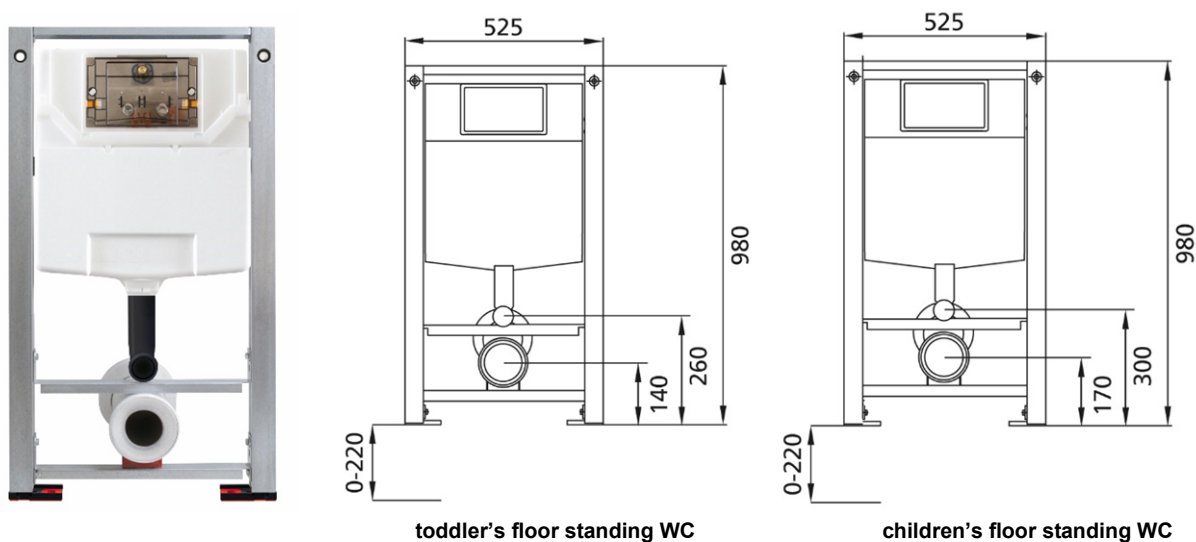

toddler's floor standing WC

children's floor standing WC

Intended use

- For drywall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For children and toddler
- For 1-flush, 2-flush or flush-stop flushing
- For floor constructions 0-22 cm

Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- Frame prepared to accommodate WC power bearings for WC ceramics with a small support area
- Footrests galvanized, adjustable 0-22 cm
- Plastic feet rotatable, depth suitable for installation in U-profiles UW 50 and UW 75
- Connecting elbow can be mounted in various depth positions without tools
- Fastening connection elbow soundproofed
- Concealed cistern with front operation, condensation water insulated
- Immediate flushing possible with factory setting
- Installation and service work on the concealed cistern without tools
- Suitable for the following Burda flush buttons T755/T784/T785/T787/T788/T789/T790/T791/T798
- Set as standard for toddler's toilets. Can be converted on site, Dimension sheet with the settings is included in the box

Scope of delivery

- Water connection R 1/2, with integrated angle valve and handwheel
- Building protection for service opening
- 1 Protective plugs
- Connection set for WC, DN 90 mm white with 2 rosettes
- Fixing material

Make: B.urda

Type: BS+

Item no: 211944.00