


Kombiblock WC element for WWC, 1080 cm with concealed cistern
Geberit Sigma for front actuation, for dual flush

Completely soundproofed ex works

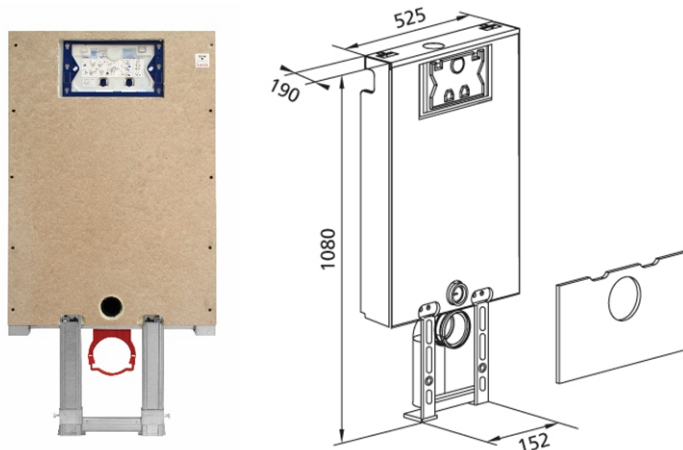

Intended use

- For drywall
- for brick walls
- For pre-wall
- For installation in partial or room-height pre-wall installations
- For installation in room-high installation walls
- For wall-mounted WCs with connection dimensions according to DIN EN 33:2011-11
- Suitable for wall-mounted WCs with projection up to 62 cm
- For 1-flush, 2-flush or flush-stop flushing
- For floor constructions 0-20 cm

Features

- Self-supporting sendzimir galvanized and soundproofed steel frame 48 mm
- With pre-assembled 12.5 mm Fermacell panel, and with all cut-outs and control openings provided
- Footrests galvanized, adjustable 0-15 cm
- Connecting elbow can be mounted in various depth positions without tools
- Fastening connection elbow soundproofed
- UP-Spülkasten mit Betätigung von vorne, schwitzwassergedämmt
- Immediate flushing possible with factory setting
- Installation and service work on the concealed cistern without tools
- Water connection at the back or top center
- Building protection for service opening protects against moisture and dirt
- Protection for service opening can be cut to length
- Suitable for Duravit Sensowash C
- Equipped with empty pipe for water supply line for connection of Geberit AquaClean devices
- Suitable for all flush buttons from the Sigma series Sigma01/10/20/50/60/70/80, (except Sigma40)
- Suitable for insertion of cleaning cubes

Scope of delivery

- Water connection R 1/2, MeplaFix-compatible, with integrated angle valve and handwheel
- Construction protection for service opening
- 2 protective plugs
- Connection set for WC, DN 90 mm
- Connection elbow made of PE-HD, DN 90/100 mm
- 2 threaded rods M12
- fixing material
- mounting space cover

Make: Burda

Type: Kombiblock

Item no.: 400008.01